



GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL

GPX ARCHITECTURAL SERIES FIRE RESISTIVE WALL WITH SUPERLITE II-XL 60
OR SUPERLITE II-XLB 60

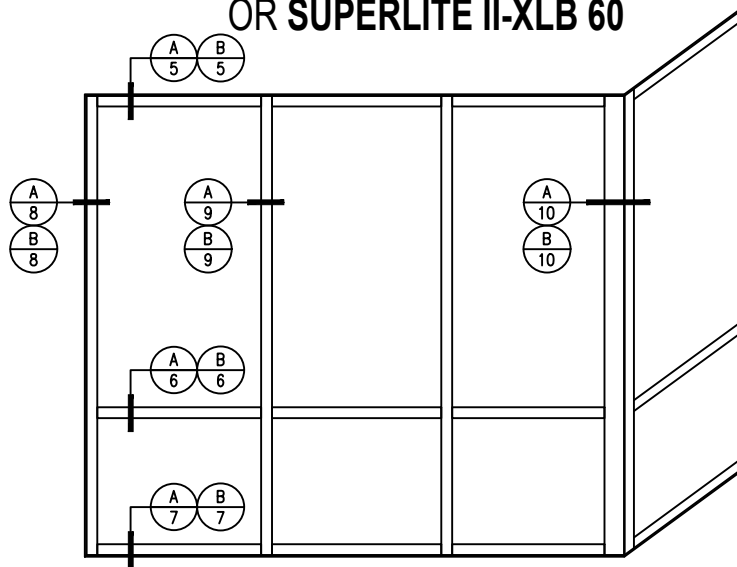

GPX ARCHITECTURAL SERIES FIRE RESISTIVE WALL - SEGMENTED WITH SUPERLITE II-XL 60
OR SUPERLITE II-XLB 60

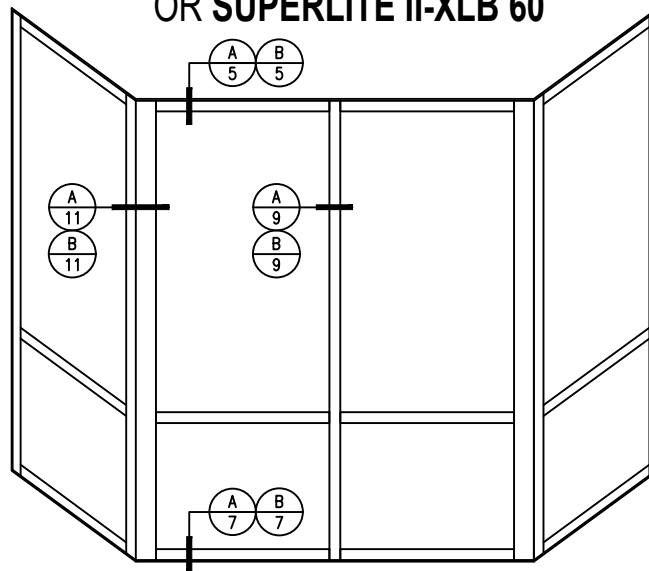


GLASS TYPE

- (A) SUPERLITE II-XL 60
MAX. CV AREA PER INDIVIDUAL LITE: **4,952 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **124 IN.**
- (B) SUPERLITE II-XLB 60
MAX. CV AREA PER INDIVIDUAL LITE: **10,000 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **125 IN.**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL

GPX ARCHITECTURAL SERIES FIRE RESISTIVE BUTT-GLAZED WALL
WITH SUPERLITE II-XLB 60 OR SUPERLITE II-XLM 60

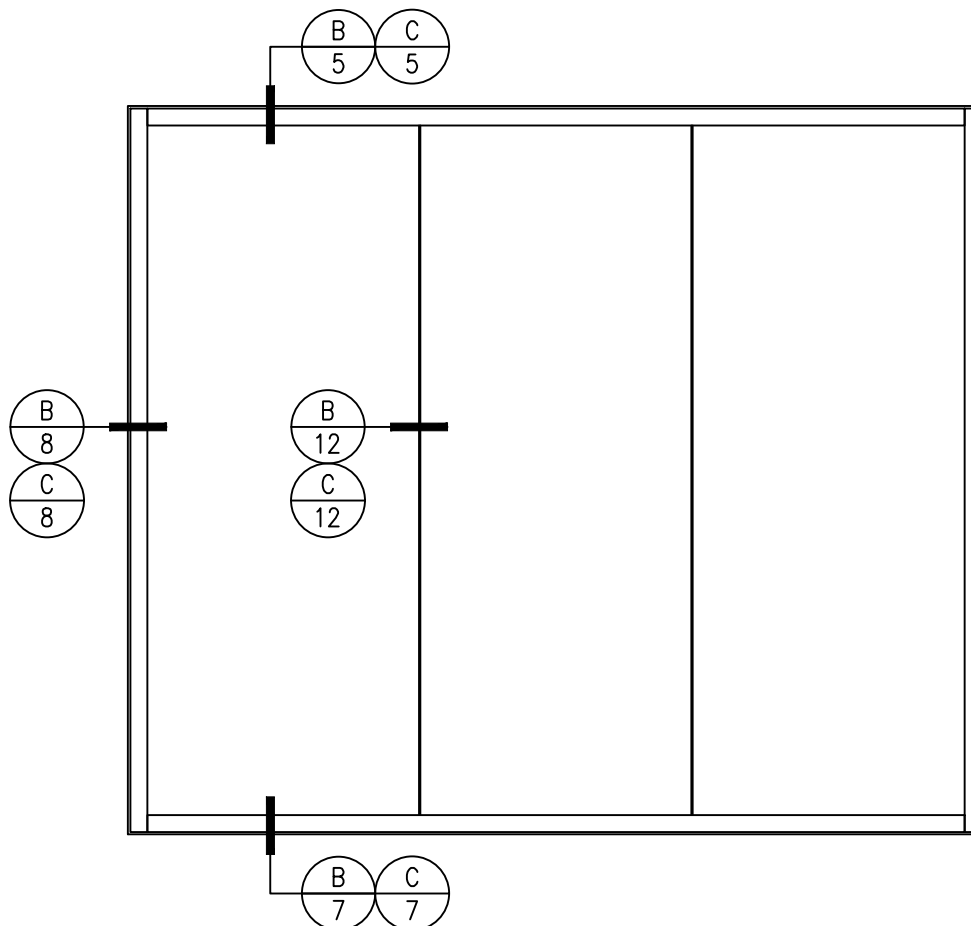

GLASS TYPE

- (B) SUPERLITE II-XLB 60
MAX. CV AREA PER INDIVIDUAL LITE:
10,000 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: **125 IN.**
- (C) SUPERLITE II-XLM 60
MAX. CV AREA PER INDIVIDUAL LITE:
3,855 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: **87 5/8 IN.**


NOTICE:

SuperLite II-XLM is not warranted for exterior applications or when exposed to moisture. Not acceptable for use with pressure cap framing. Special precautions are necessary when handling and during installation due to breakage considerations. Optical and minor visual irregularities are deemed acceptable and not a reason for rejection. Special precaution must be taken to protect the fragile multiple layered thin annealed glass and the moisture barrier foil tape protecting the hydrophilic intumescent material within.

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES TEMPERATURE RISE SINGLE DOOR WITH SUPERLITE II-XL 60 STANDARD (D) NARROW STYLE (E)

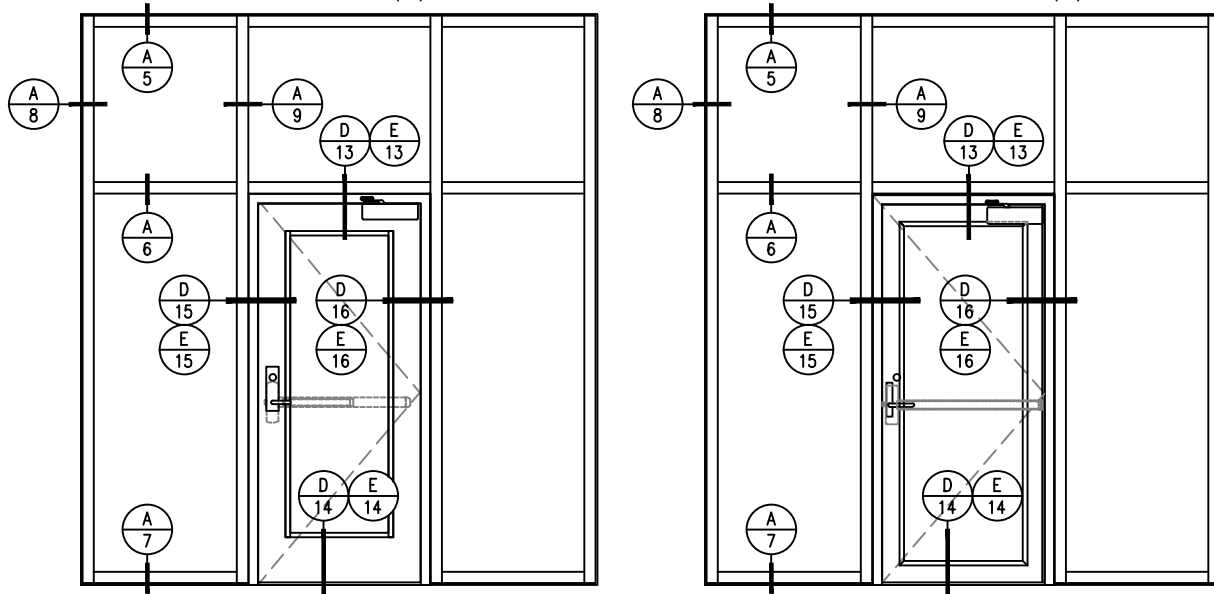

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 54 IN. X 120 IN.

GPX BUILDERS SERIES TEMPERATURE RISE PAIR DOOR WITH SUPERLITE II-XL 60 STANDARD (D) NARROW STYLE (E)

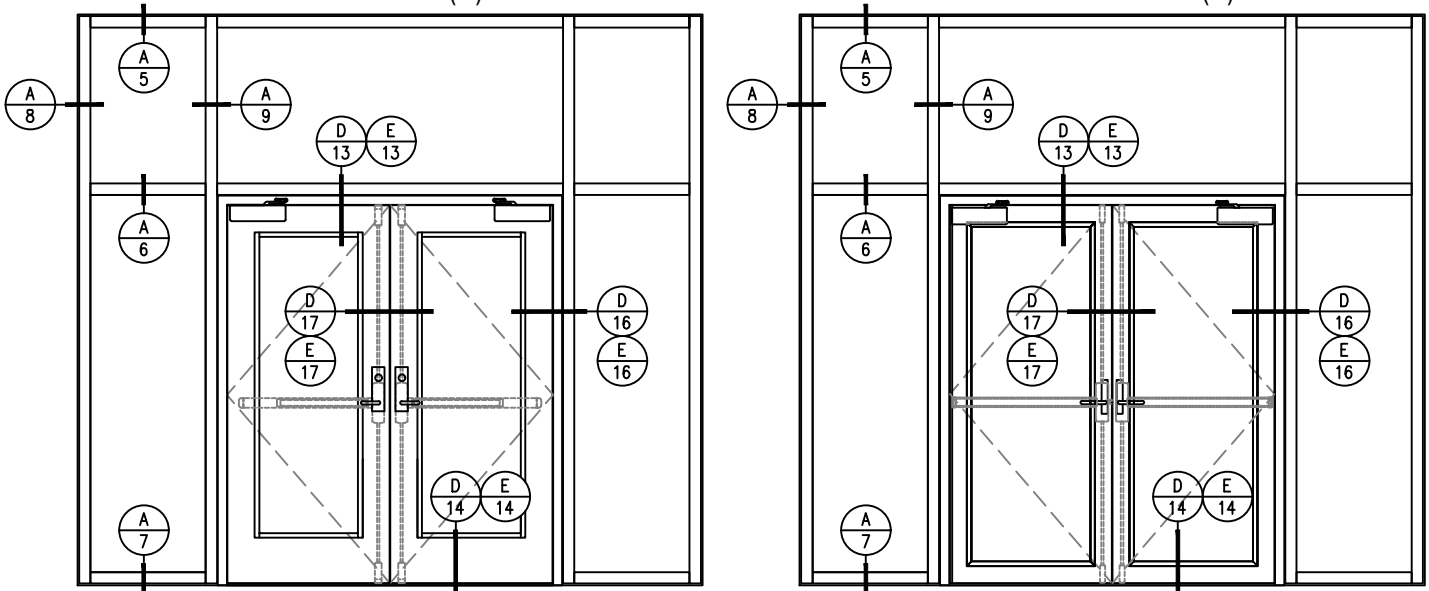


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 120 IN.

GPX ARCHITECTURAL SERIES


60 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* DOORS

GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* SINGLE DOOR WITH SUPERLITE II-XL 60

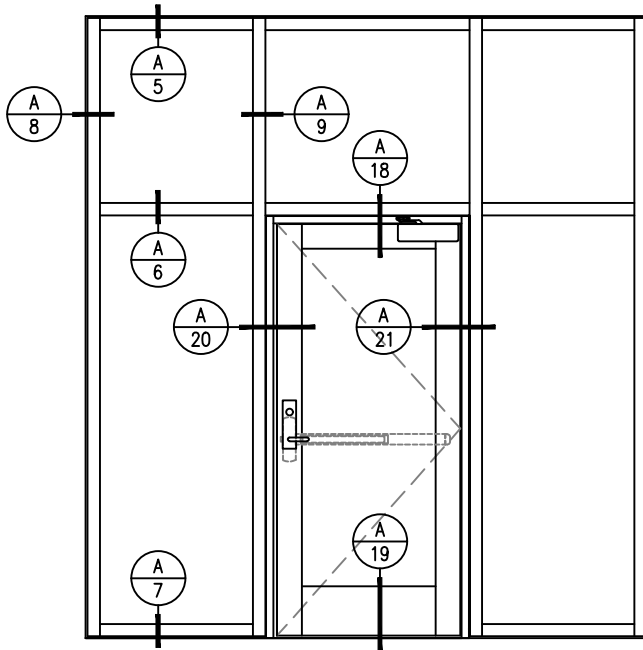

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* PAIR DOOR WITH SUPERLITE II-XL 60

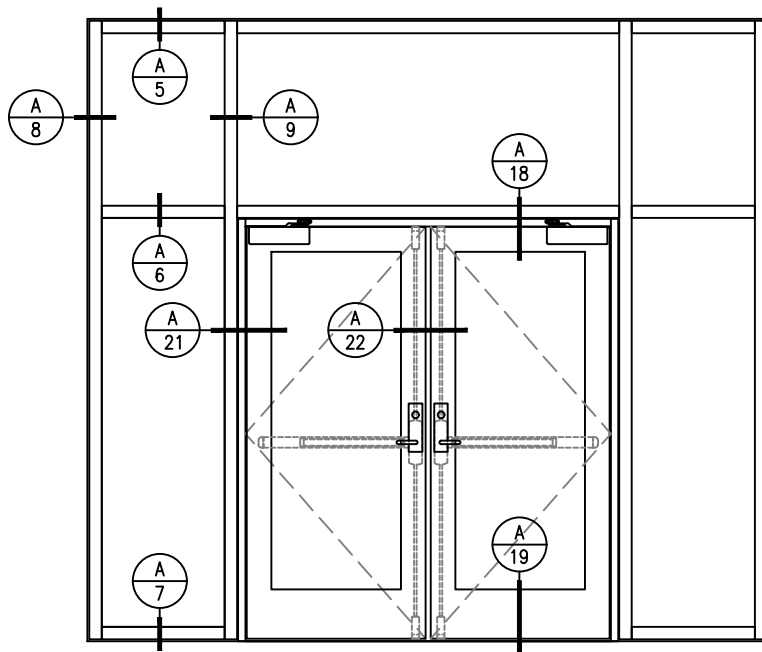


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

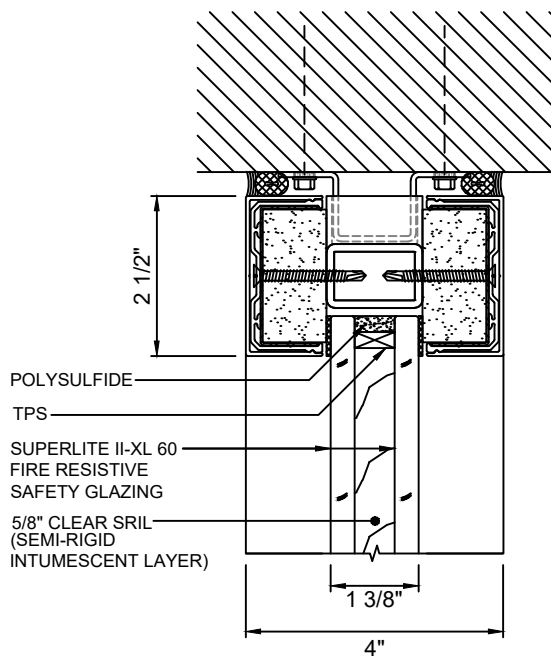

A HEAD DETAIL
5 WITH **SUPERLITE II-XL 60**

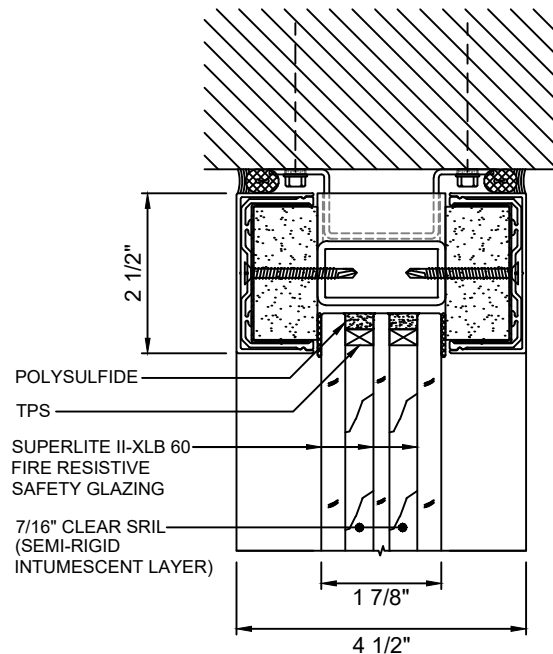



B HEAD DETAIL
5 WITH **SUPERLITE II-XLB 60**

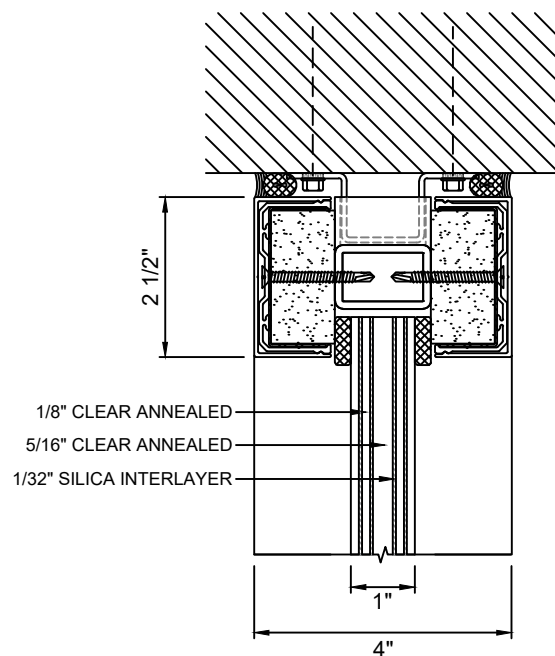

C HEAD DETAIL
5 WITH **SUPERLITE II-XLM 60**


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

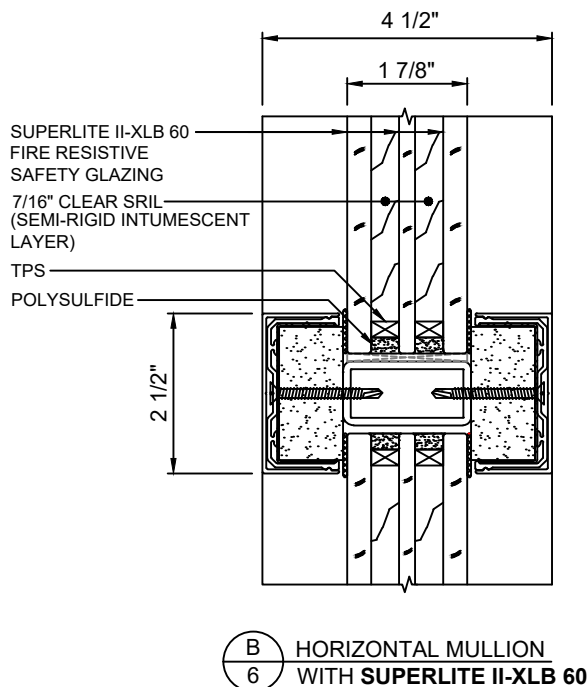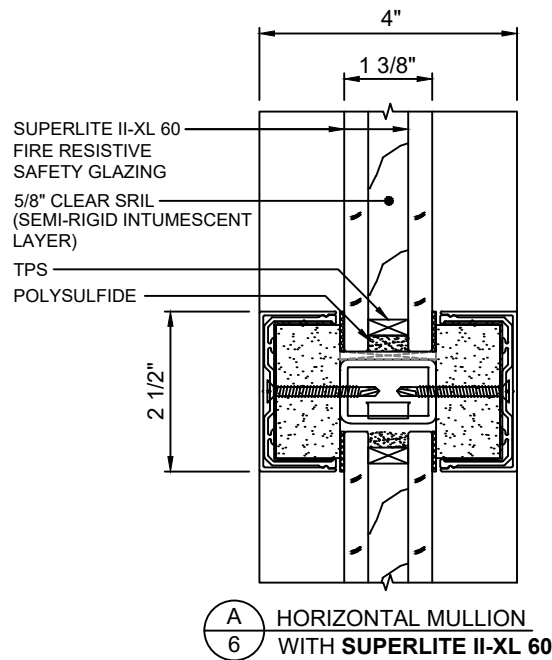


GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

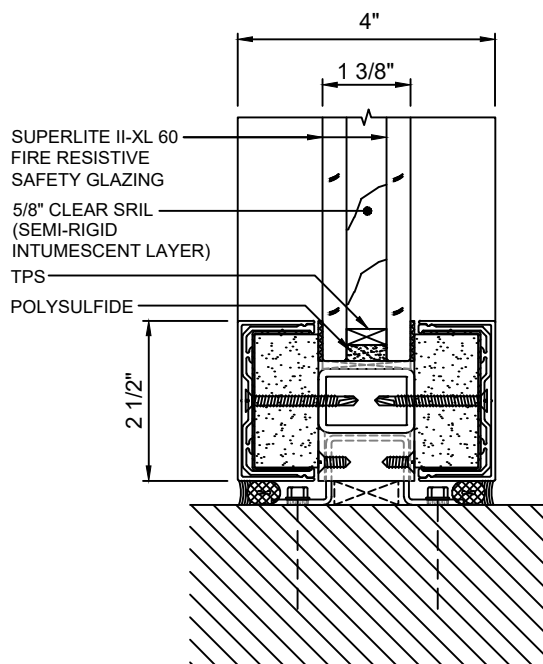

A
7 SILL DETAIL
WITH **SUPERLITE II-XL 60**

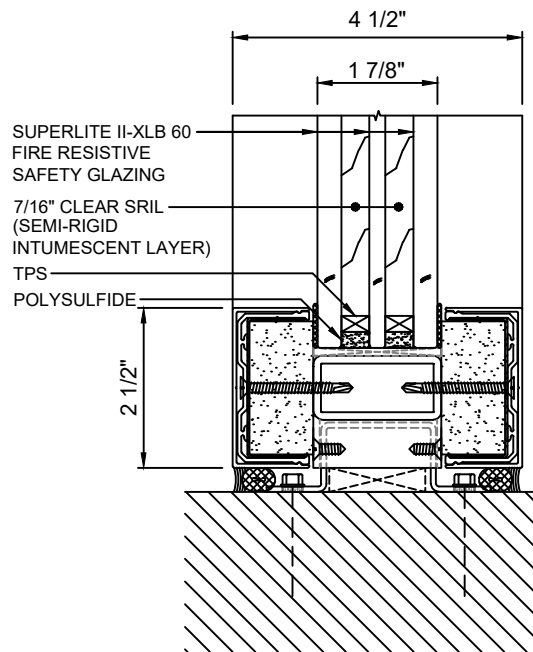


B
7 SILL DETAIL
WITH **SUPERLITE II-XLB 60**

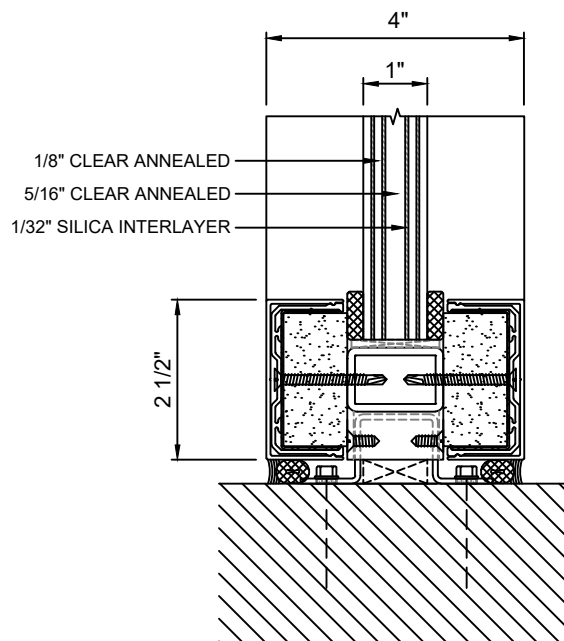


C
7 SILL DETAIL
WITH **SUPERLITE II-XLM 60**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

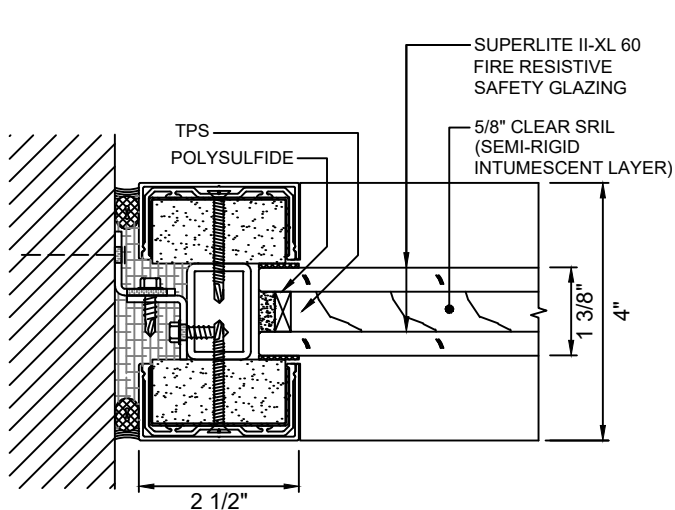

A
8 JAMB DETAIL
WITH SUPERLITE II-XL 60

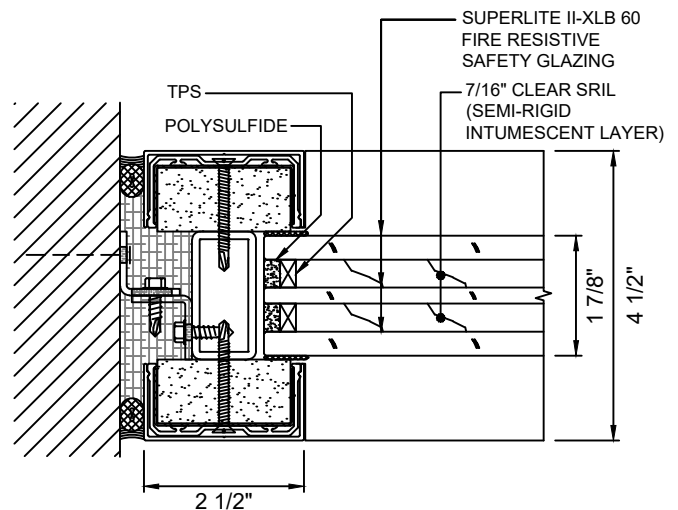


B
8 JAMB DETAIL
WITH SUPERLITE II-XLB 60

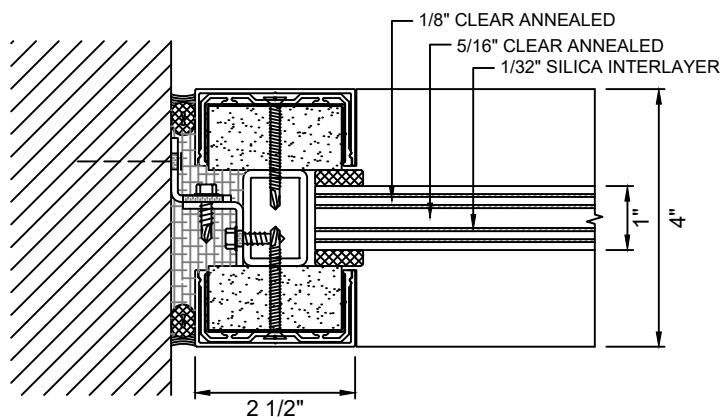


C
8 JAMB DETAIL
WITH SUPERLITE II-XLM 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

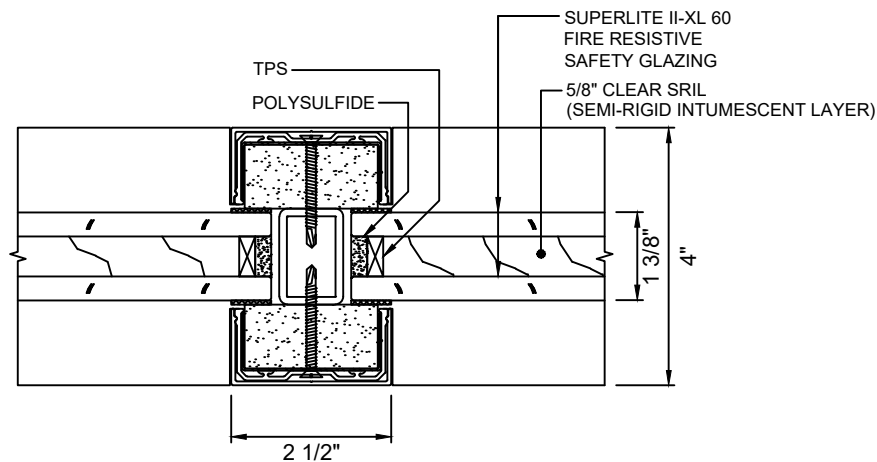


A
9 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XL 60**

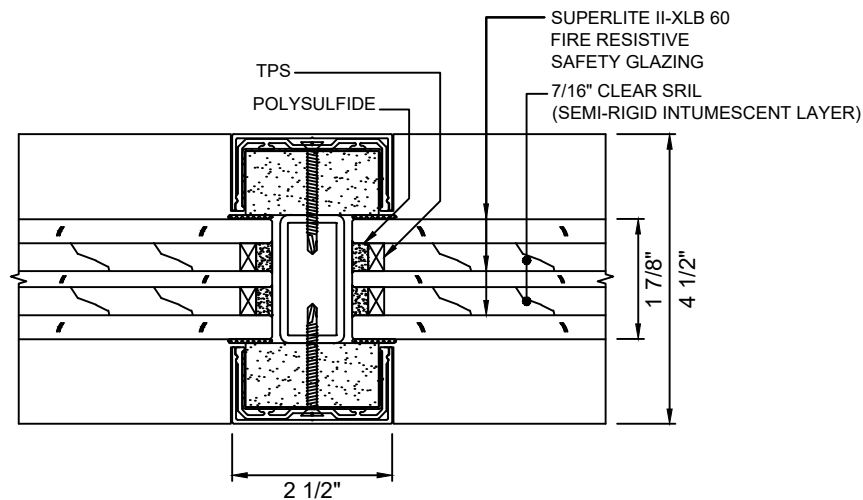


B
9 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XLB 60**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

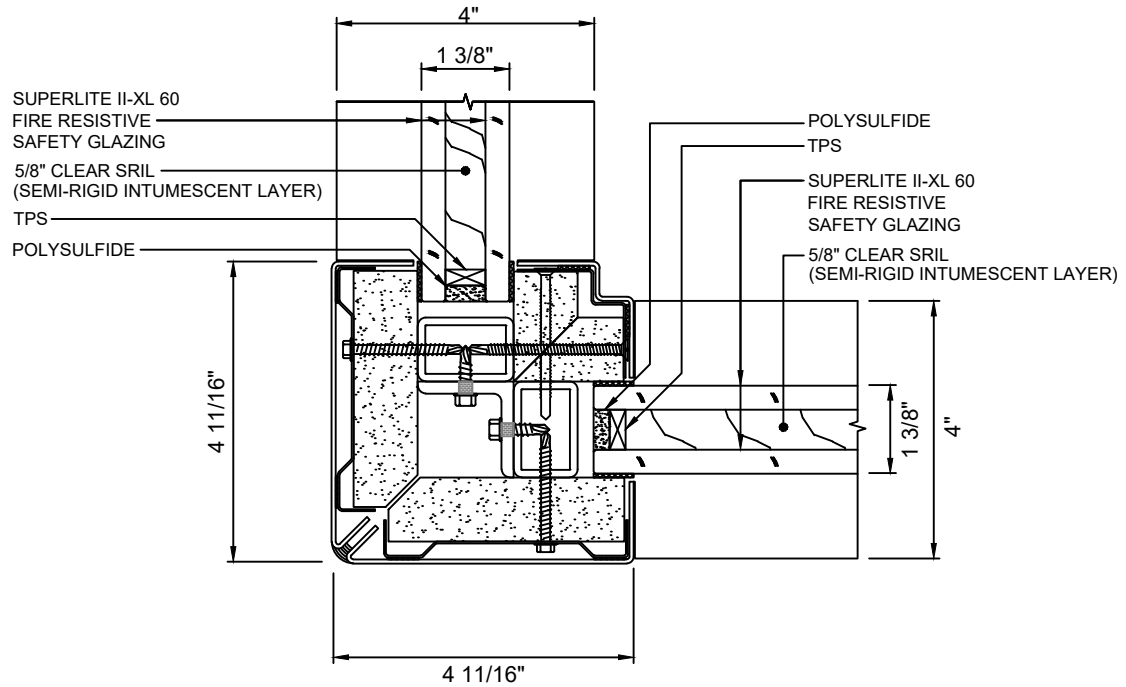


A 90° CORNER DETAIL
10 WITH SUPERLITE II-XL 60

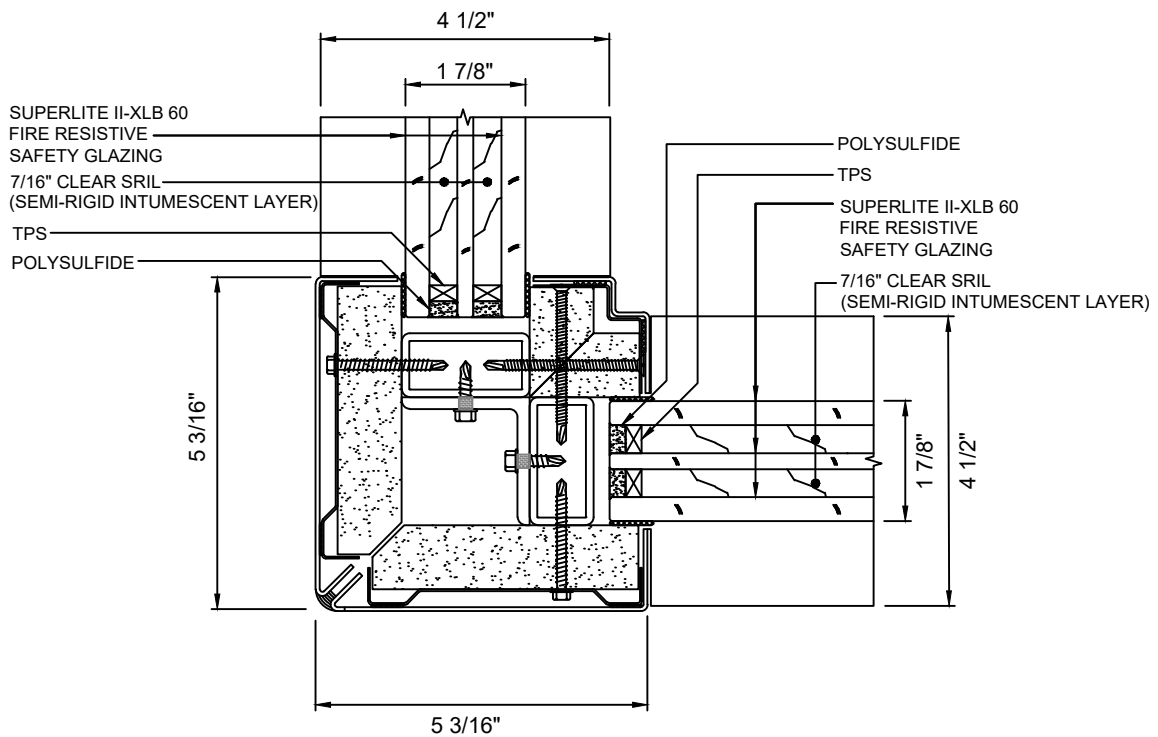


B 90° CORNER DETAIL
10 WITH SUPERLITE II-XLB 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

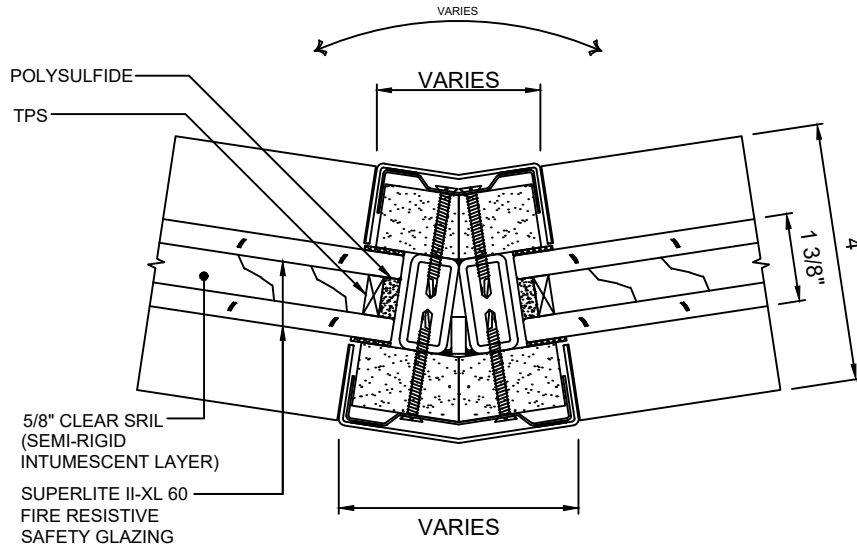


A
11 SEGMENTED VERTICAL
WITH **SUPERLITE II-XL 60**

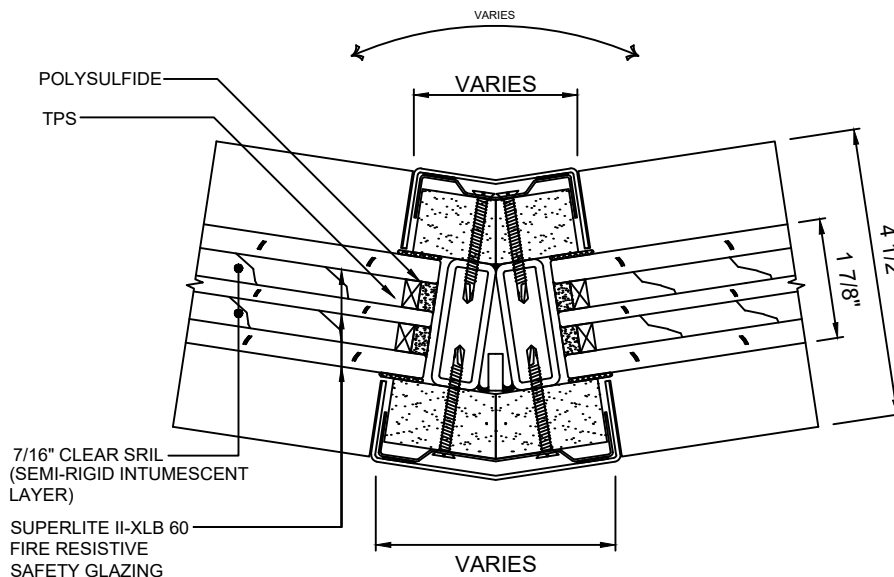


B
11 SEGMENTED VERTICAL
WITH **SUPERLITE II-XLB 60**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

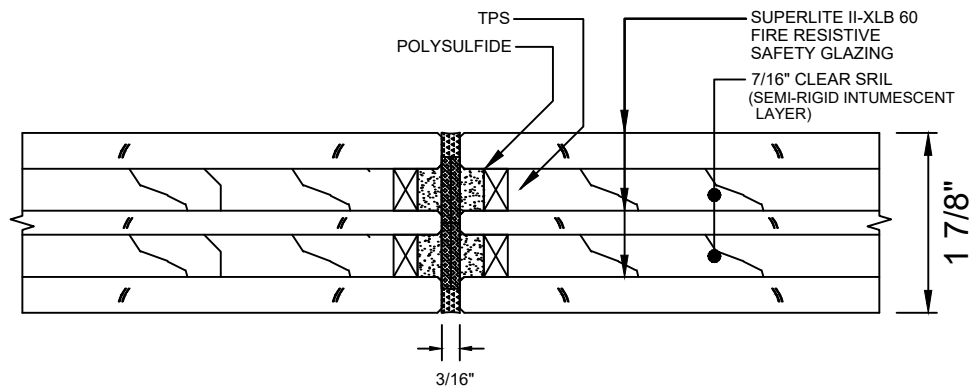

B
12
 VERTICAL BUTT JOINT
WITH **SUPERLITE II-XLB 60**

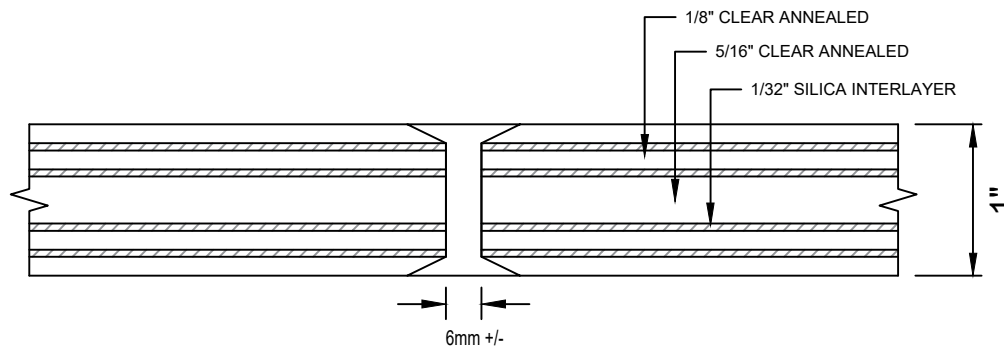


C
12
 VERTICAL BUTT JOINT
WITH **SUPERLITE II-XLM 60**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

GPX BUILDERS SERIES DOOR NARROW STYLE

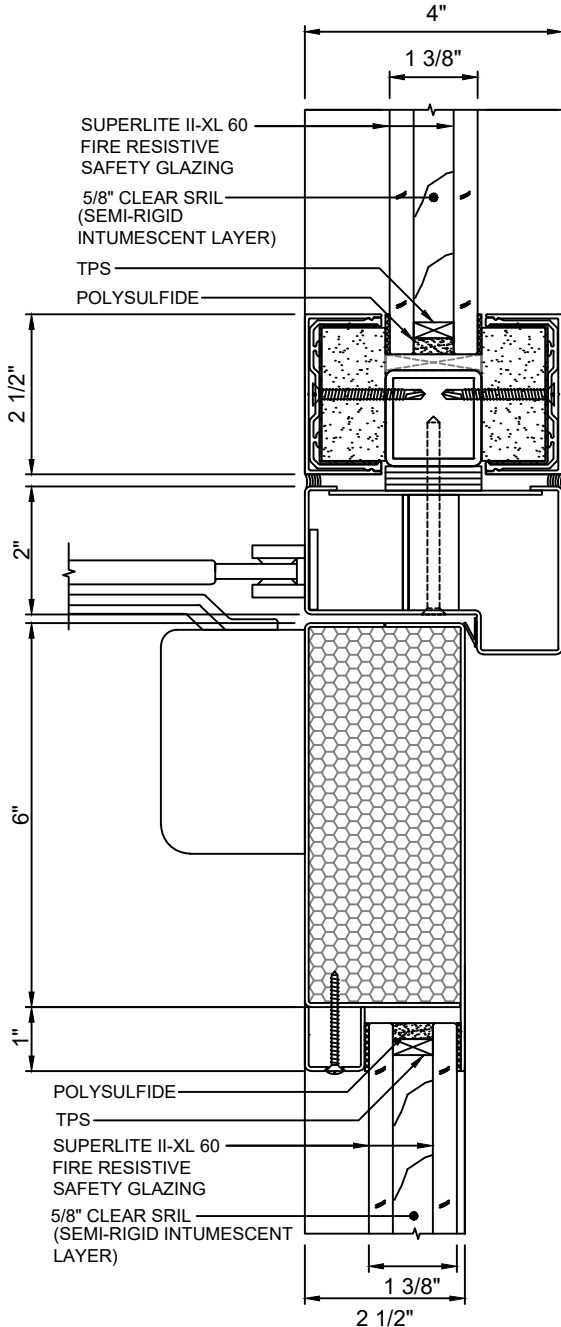

D
13 DOOR TOP RAIL - STANDARD
WITH SUPERLITE II-XL 60

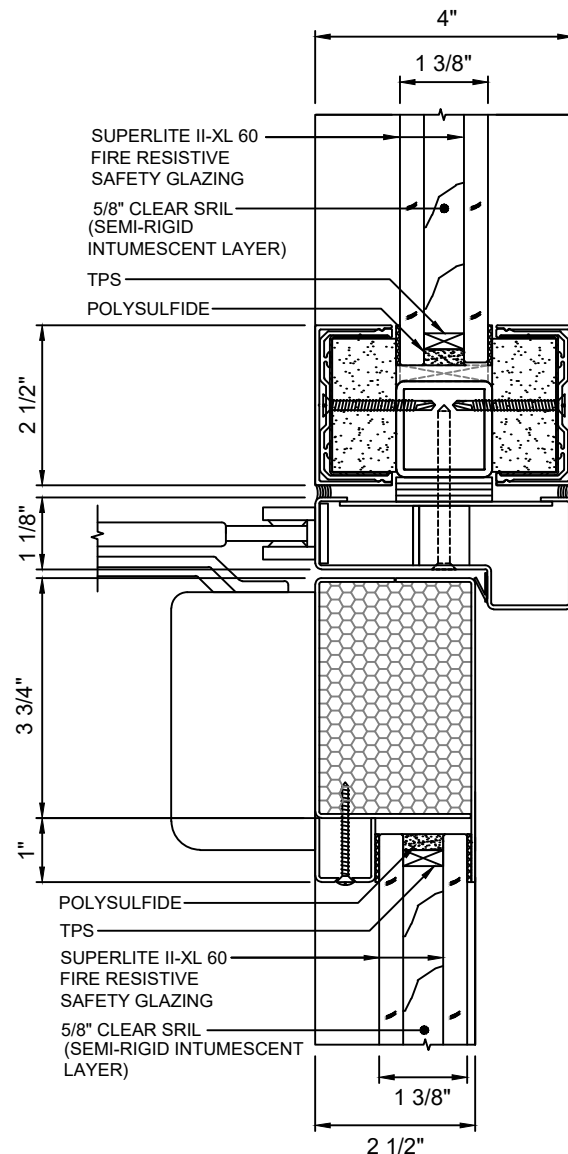





E
13 DOOR TOP RAIL - NARROW STYLE
WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS


GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM

GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

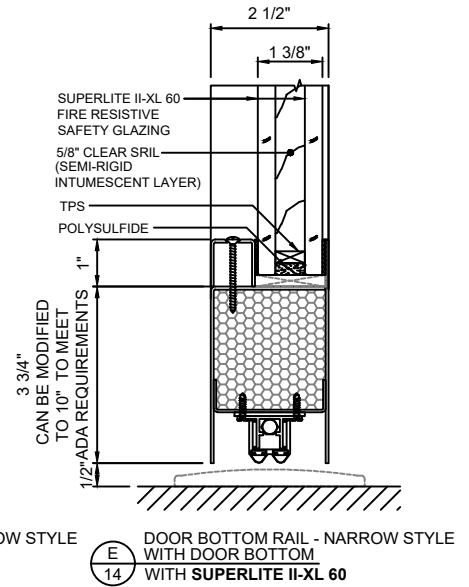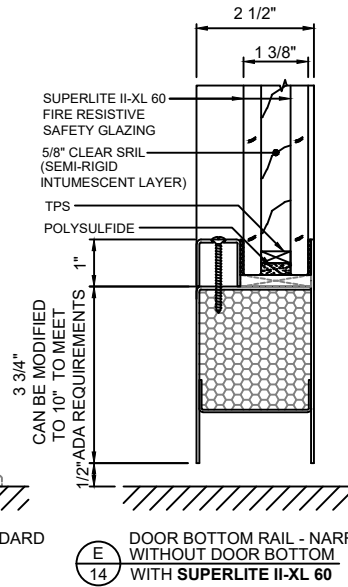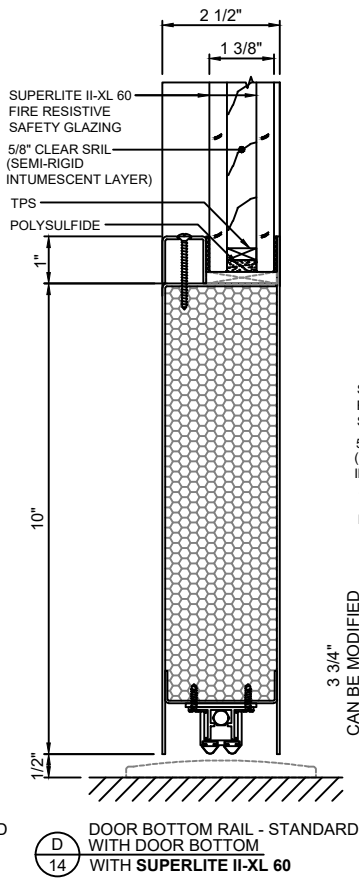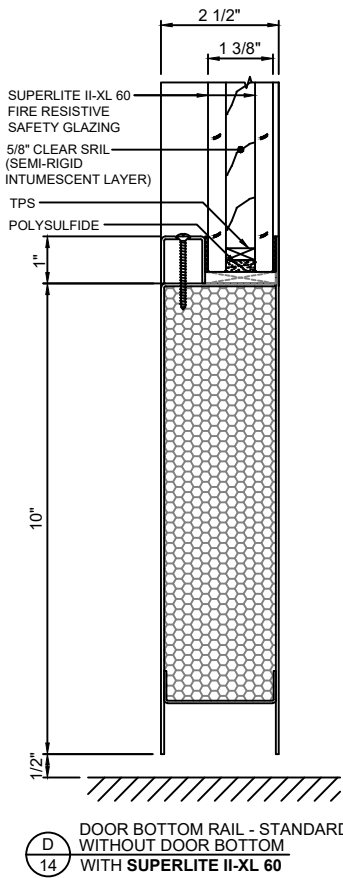


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

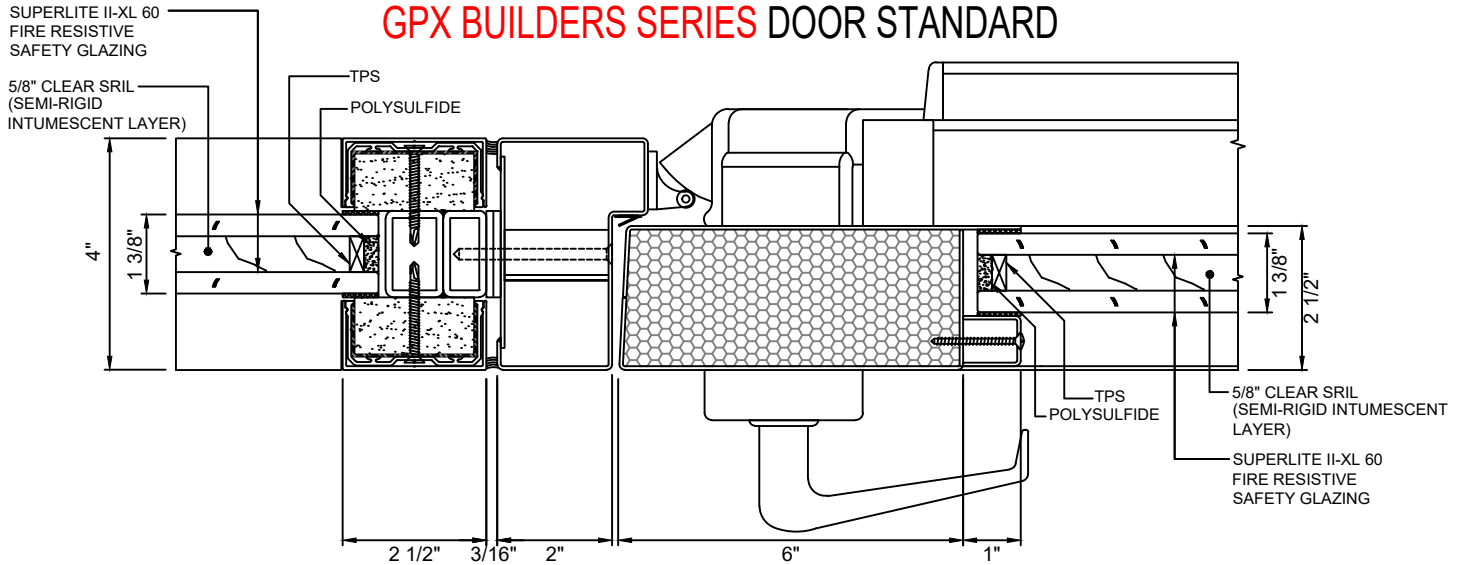

D DOOR JAMB AT LOCK - STANDARD
15 WITH SUPERLITE II-XL 60

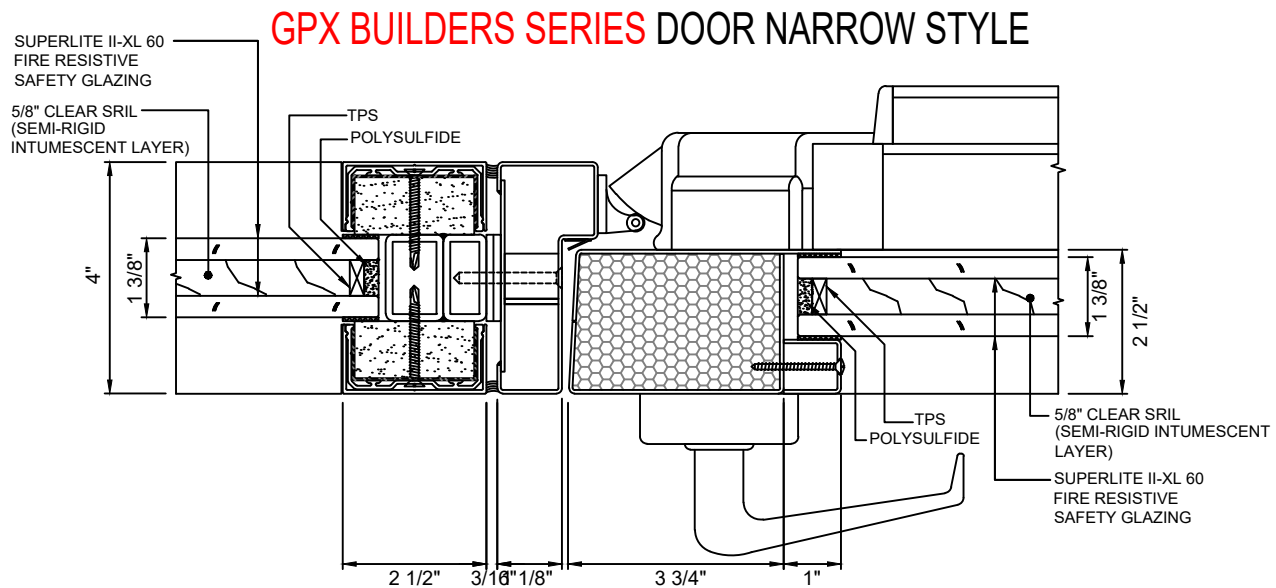


E DOOR JAMB AT LOCK - NARROW STYLE
15 WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

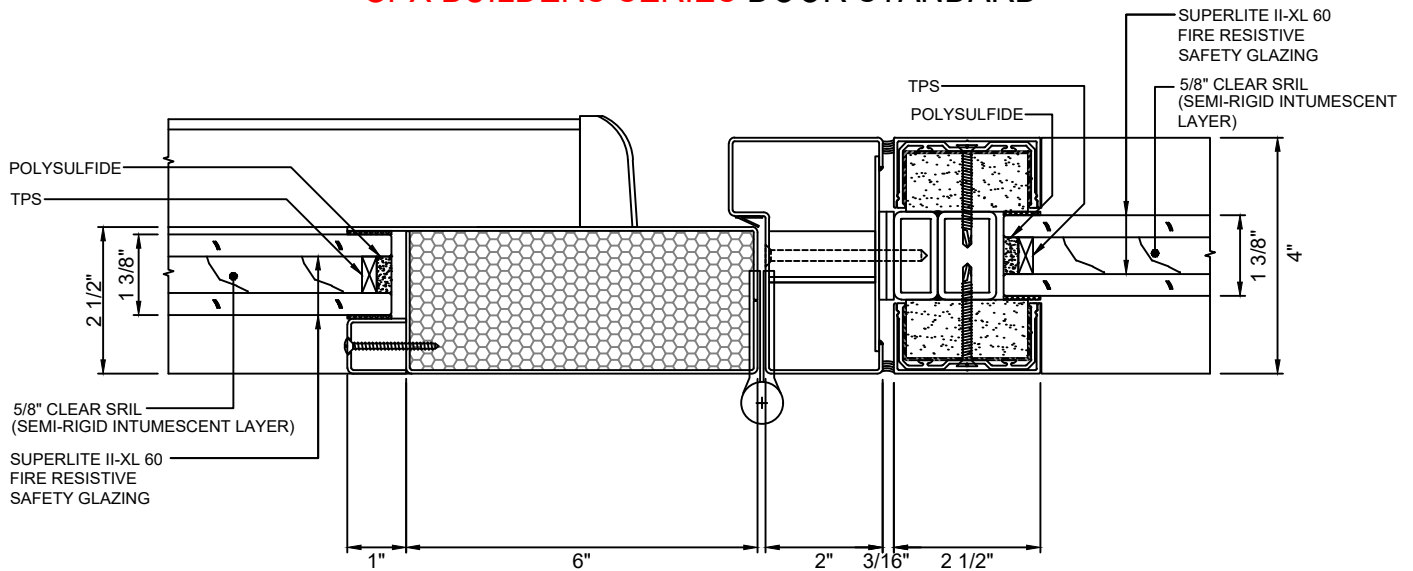

D DOOR JAMB AT HINGE - STANDARD
16 WITH SUPERLITE II-XL 60

GPX BUILDERS SERIES DOOR NARROW STYLE

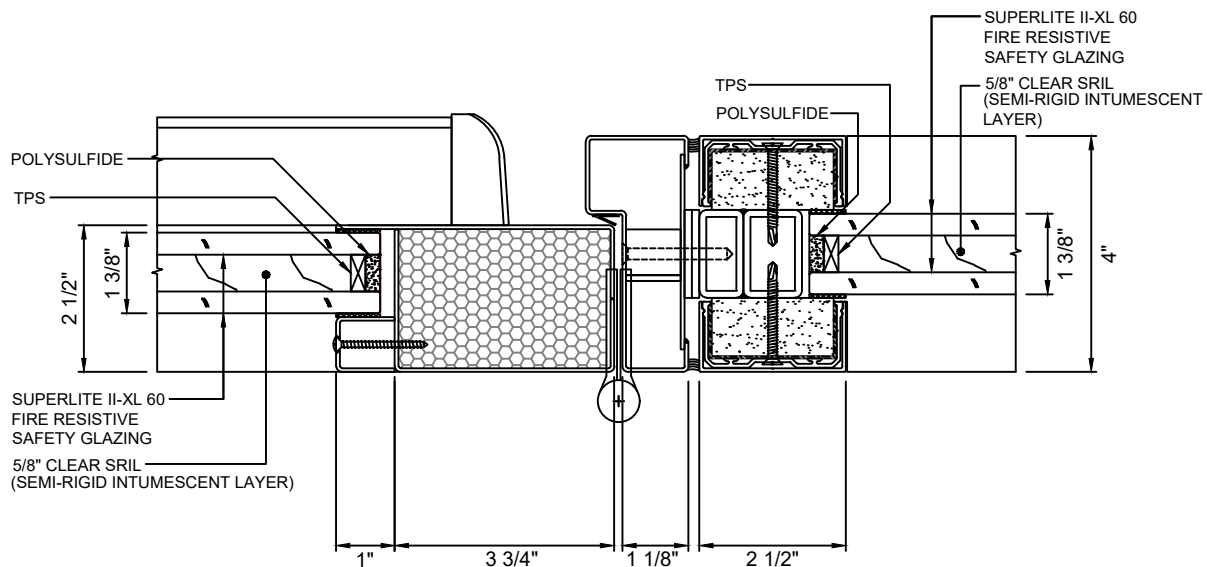


E DOOR JAMB AT HINGE - NARROW STYLE
16 WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

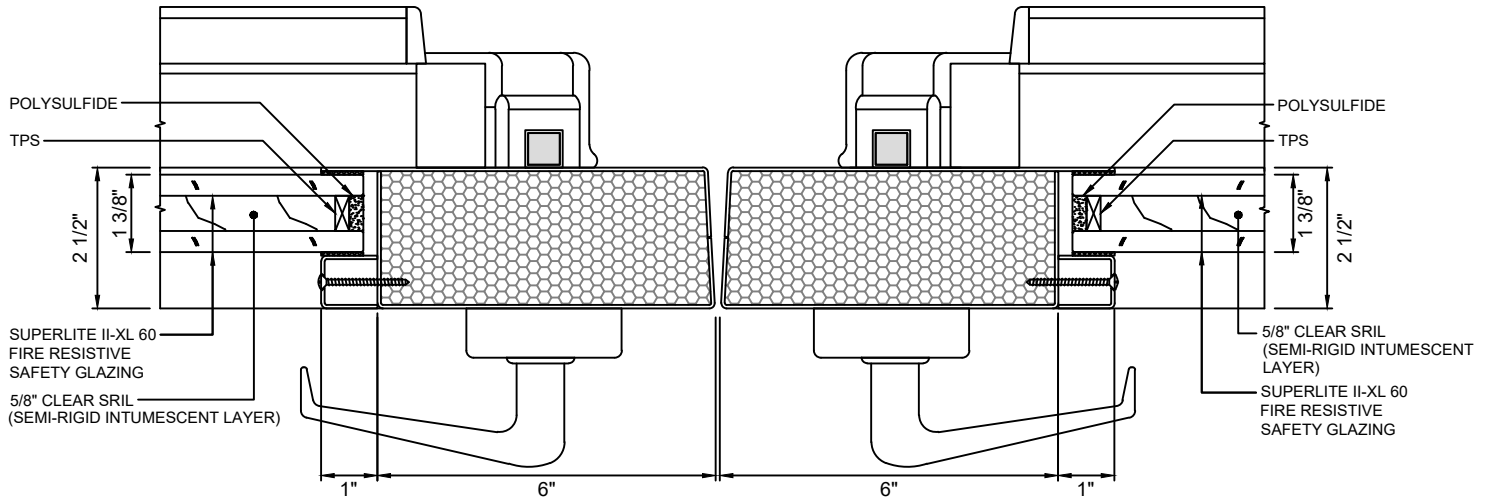

D MEETING STILES - STANDARD
17 WITH SUPERLITE II-XL 60

GPX BUILDERS SERIES DOOR NARROW STYLE

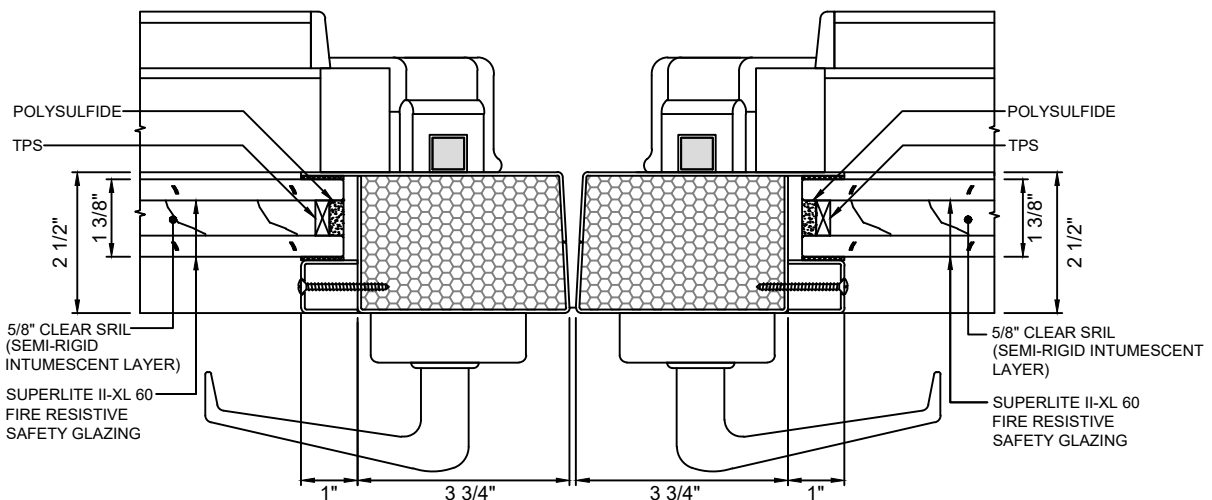


E MEETING STILES - NARROW STYLE
17 WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES DOOR STANDARD

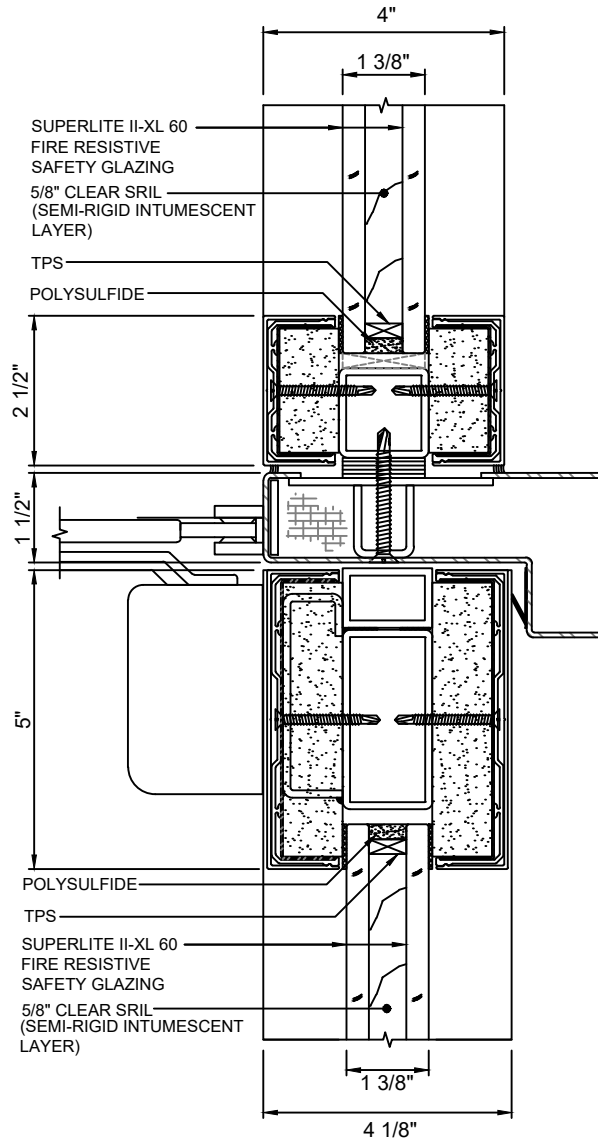


A
18 DOOR TOP RAIL
WITH SUPERLITE II-XL 60


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES DOOR STANDARD WITH & WITHOUT THRESHOLD

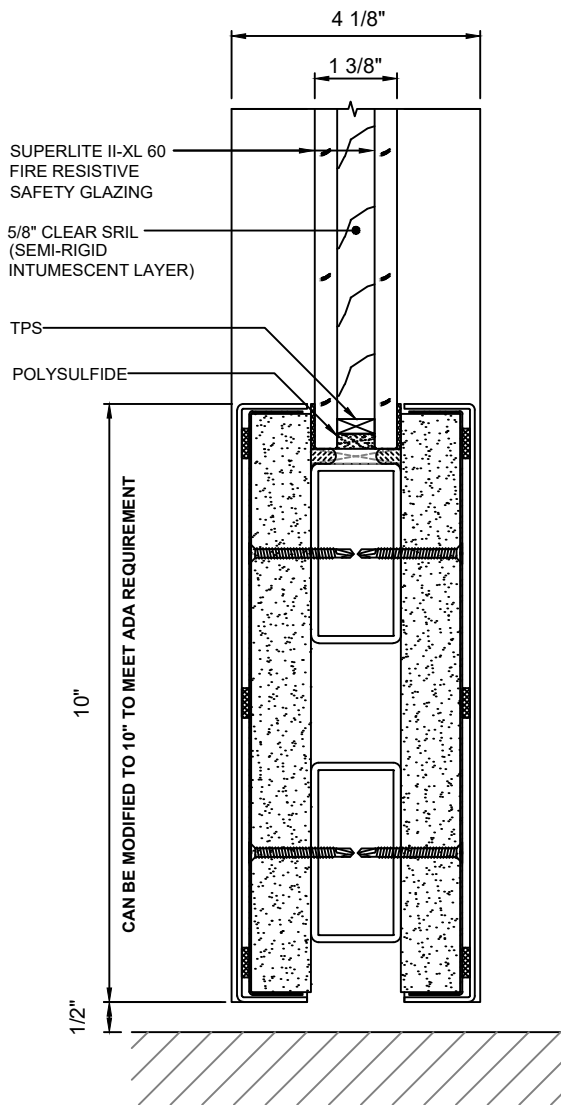

A
19 DOOR BOTTOM RAIL
WITHOUT THRESHOLD
WITH SUPERLITE II-XL 60

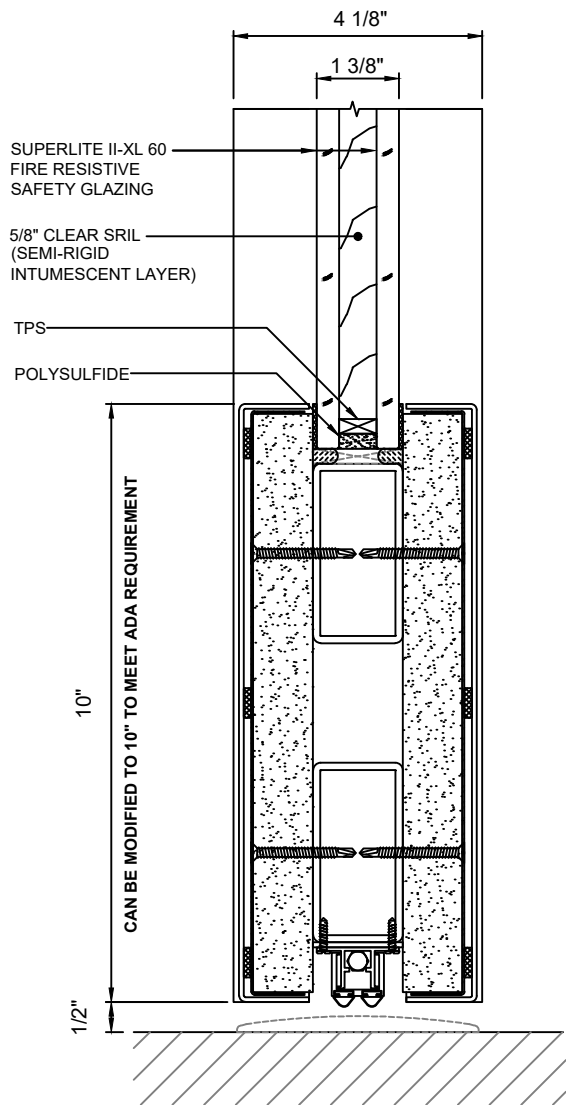


A
19 DOOR BOTTOM RAIL
WITH THRESHOLD
WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES DOOR STANDARD

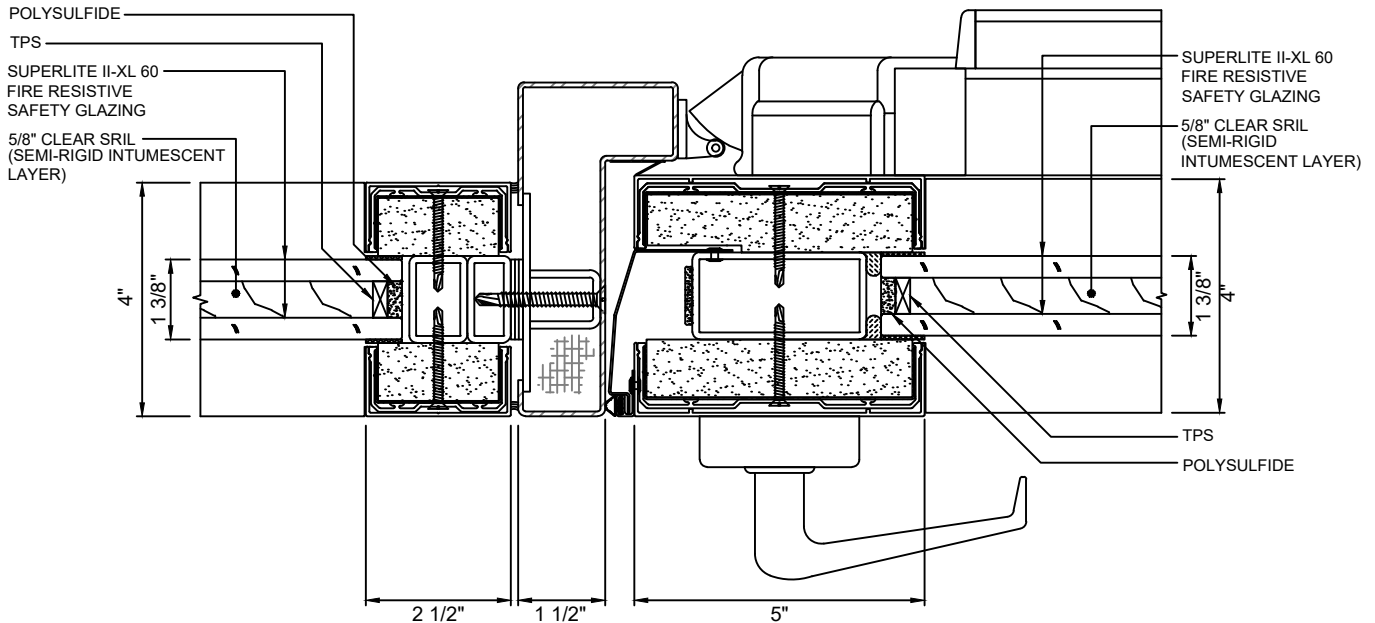


A
20 DOOR JAMB AT LOCK
WITH SUPERLITE II-XL 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS


GPX ARCHITECTURAL SERIES DOOR STANDARD

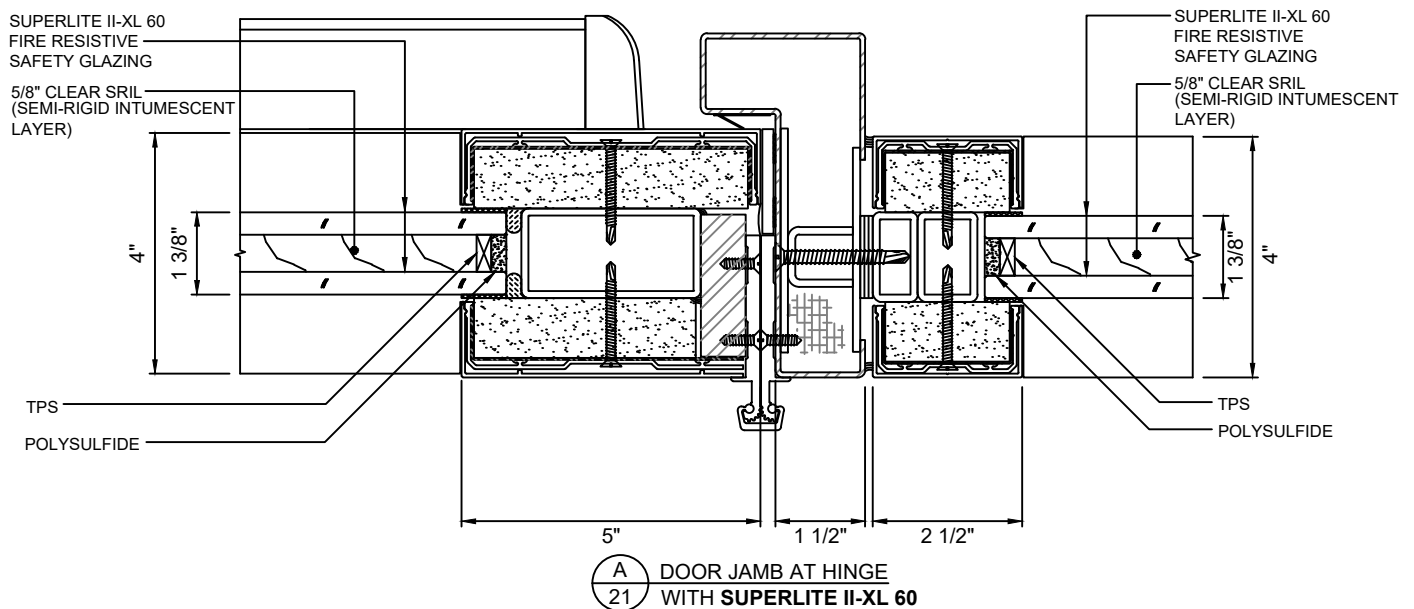

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES DOOR STANDARD

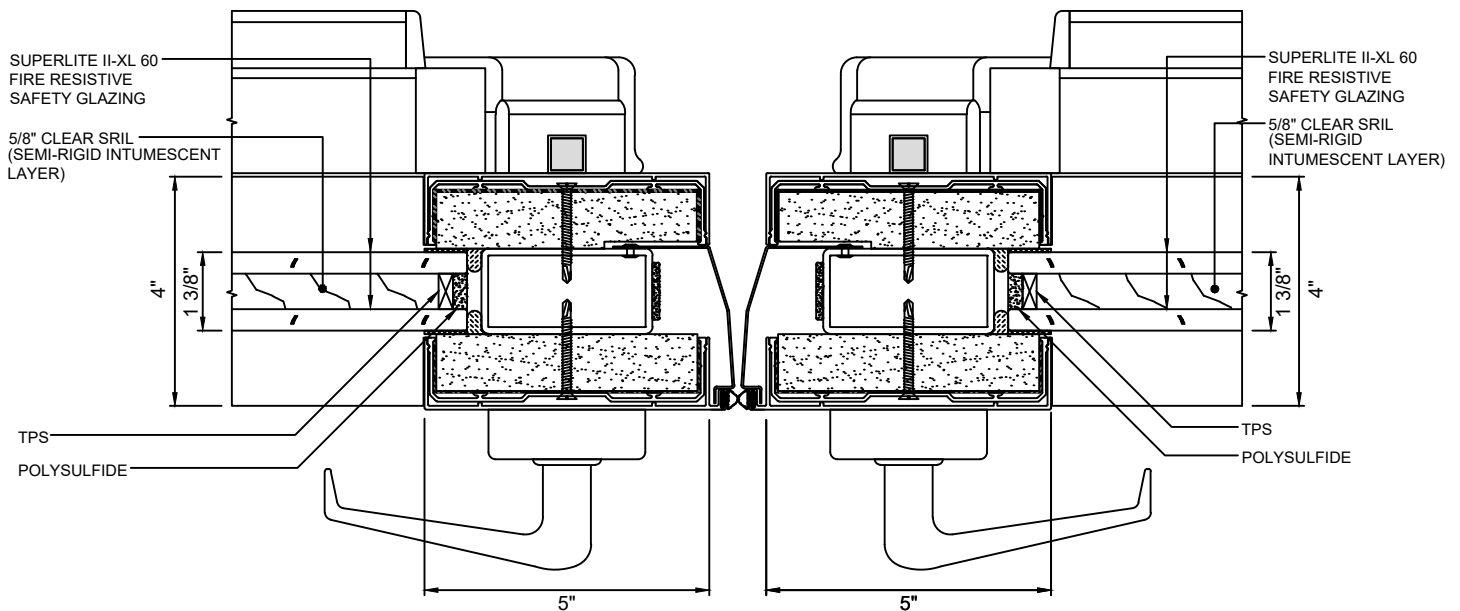

A
22 MEETING STILES
WITH SUPERLITE II-XL 60