


GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

GPX CURTAIN WALL SYSTEM WITH SUPERLITE II-XL 120
OR SUPERLITE II-XLB 120

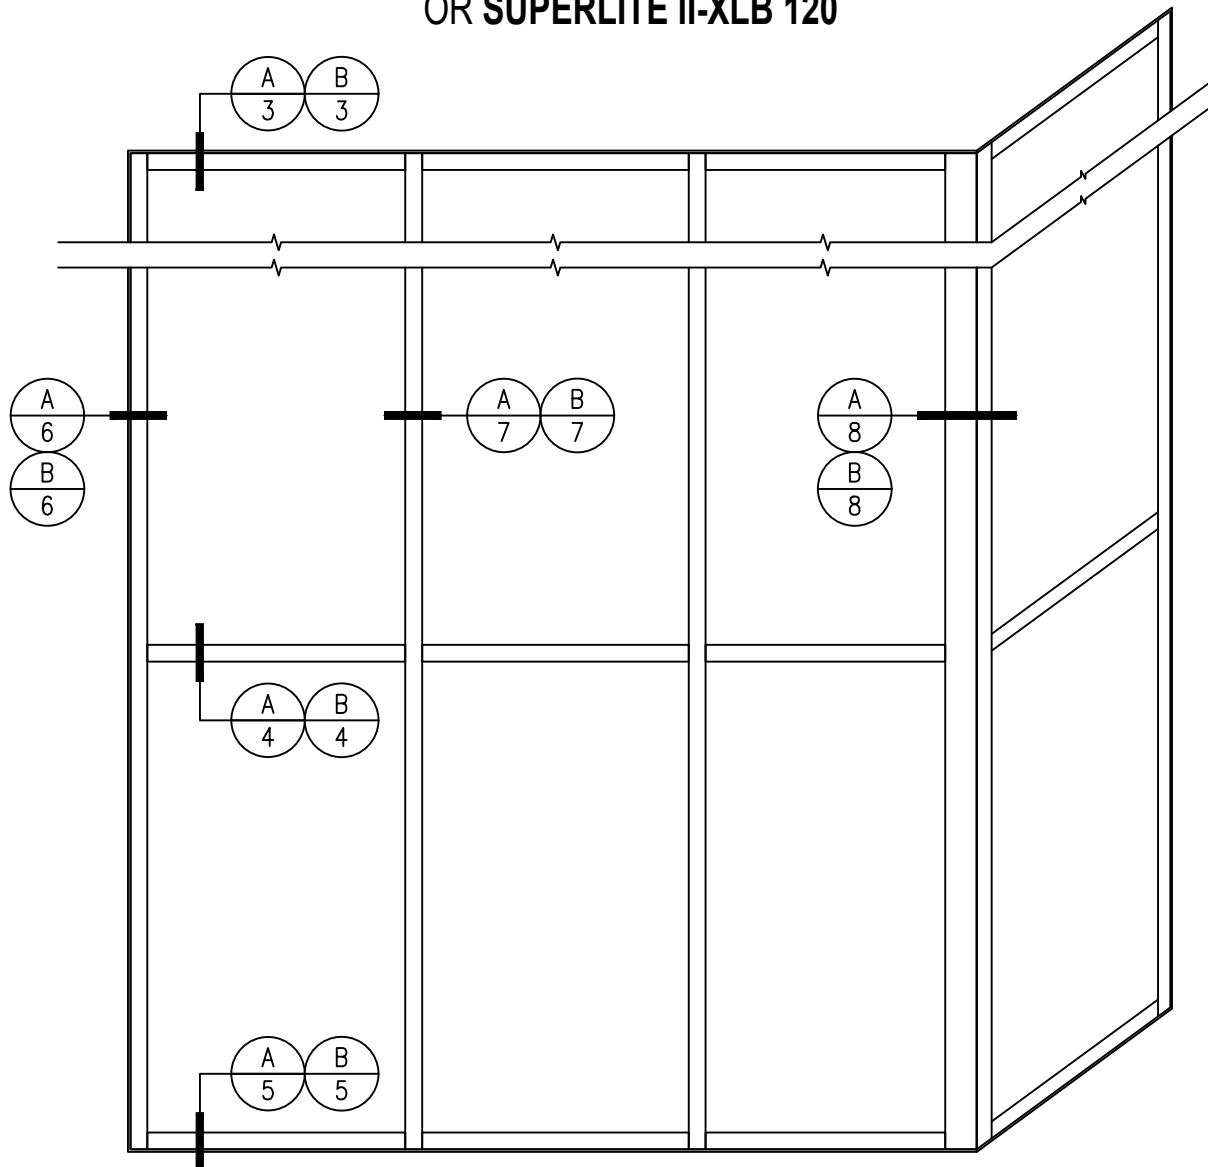


GLASS TYPE

- (A) SUPERLITE II-XL 120
MAX. CV AREA PER INDIVIDUAL LITE: **4,876 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **124 IN.**
- (B) SUPERLITE II-XLB 120
MAX. CV AREA PER INDIVIDUAL LITE: **7,980 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **133 IN.**

GPX CURTAINWALL SYSTEM


120 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES *TEMPERATURE RISE* DOORS

GPX BUILDERS SERIES *TEMPERATURE RISE* SINGLE DOOR WITH SUPERLITE II-XL 90 STANDARD (D) NARROW STYLE (E)

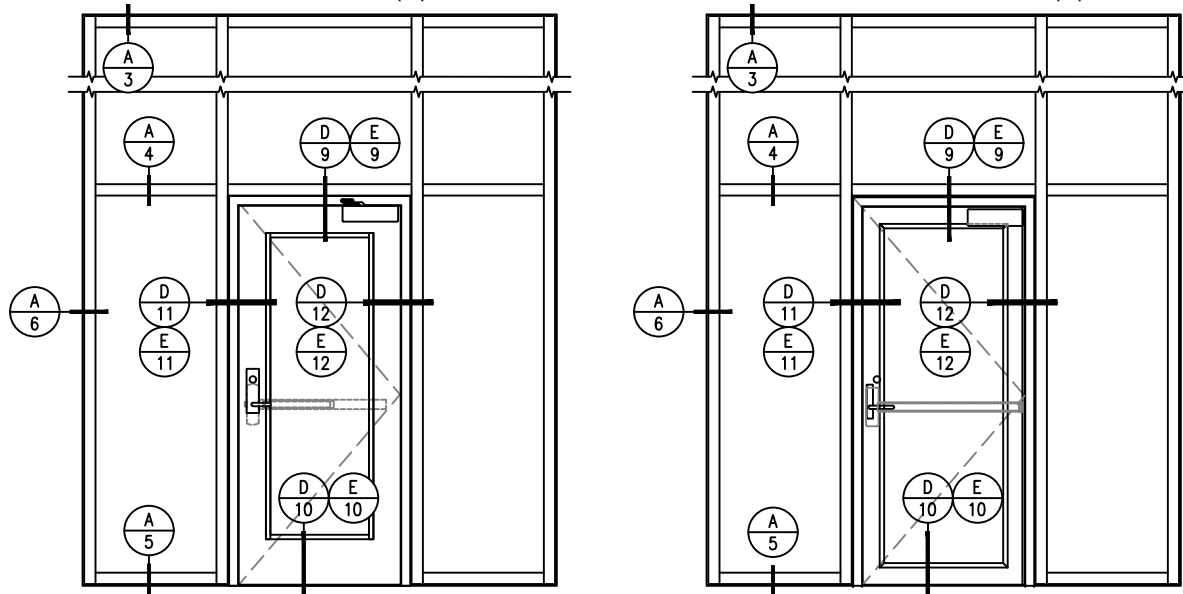


MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: **54 IN. X 120 IN.**

GPX BUILDERS SERIES *TEMPERATURE RISE* PAIR DOOR WITH SUPERLITE II-XL 90 STANDARD (D) NARROW STYLE (E)

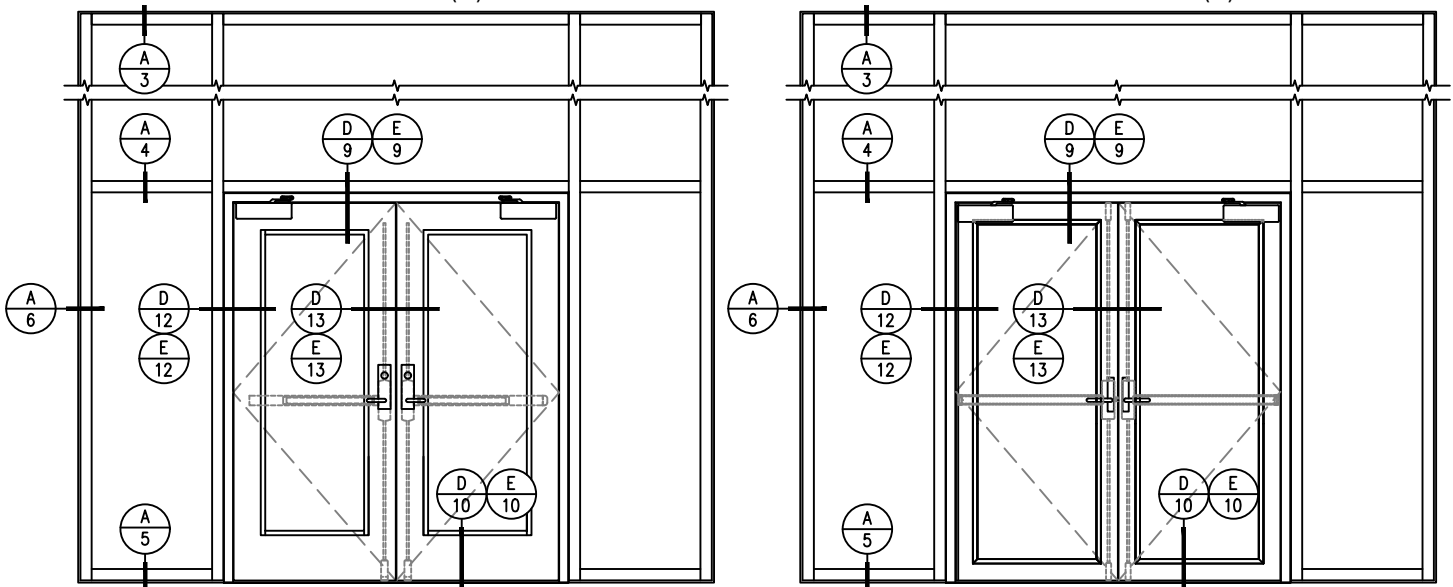


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: **96 IN. X 120 IN.**

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

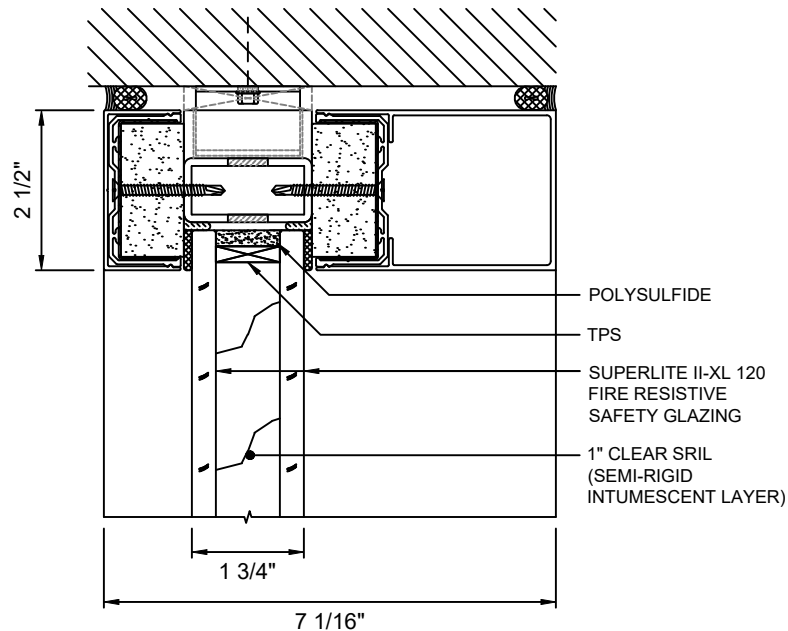



A HEAD DETAIL
3 WITH **SUPERLITE II-XL 120**

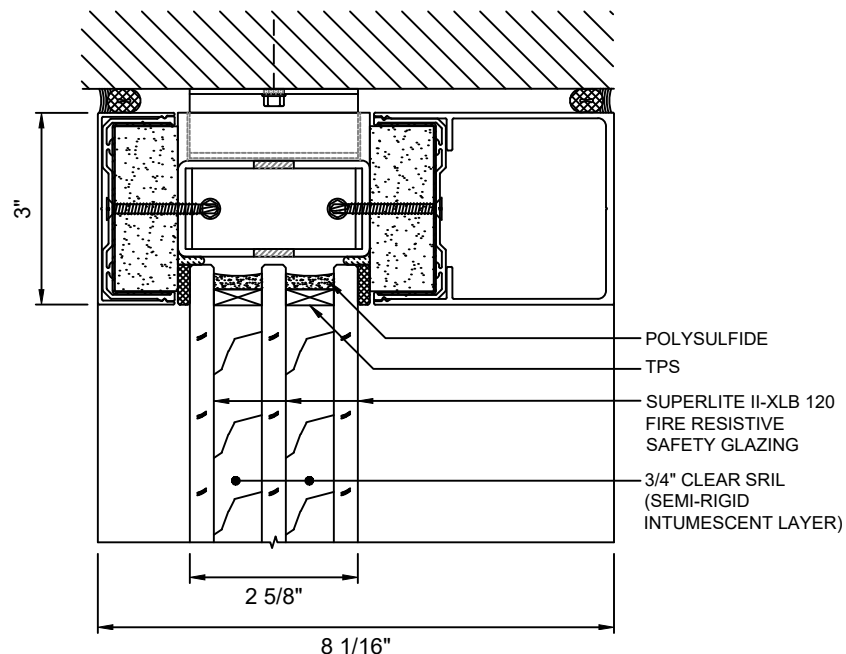

B HEAD DETAIL
3 WITH **SUPERLITE II-XLB 120**


GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

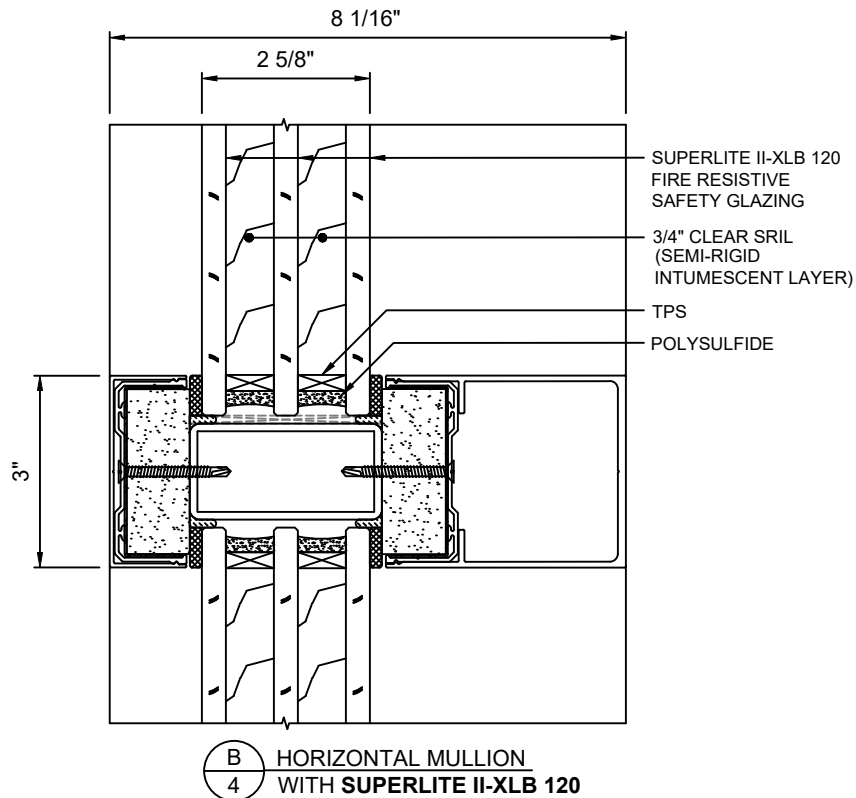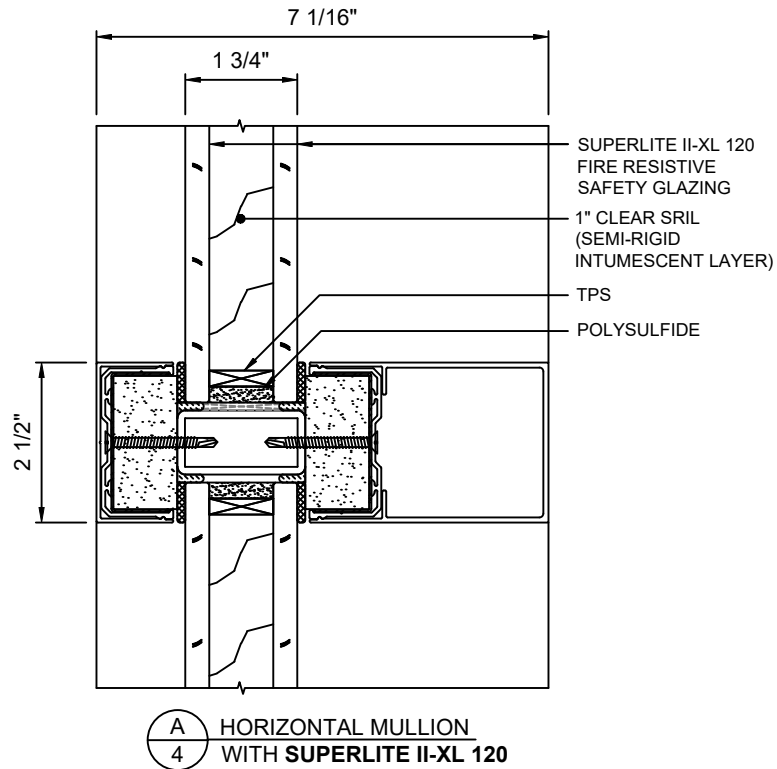


GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

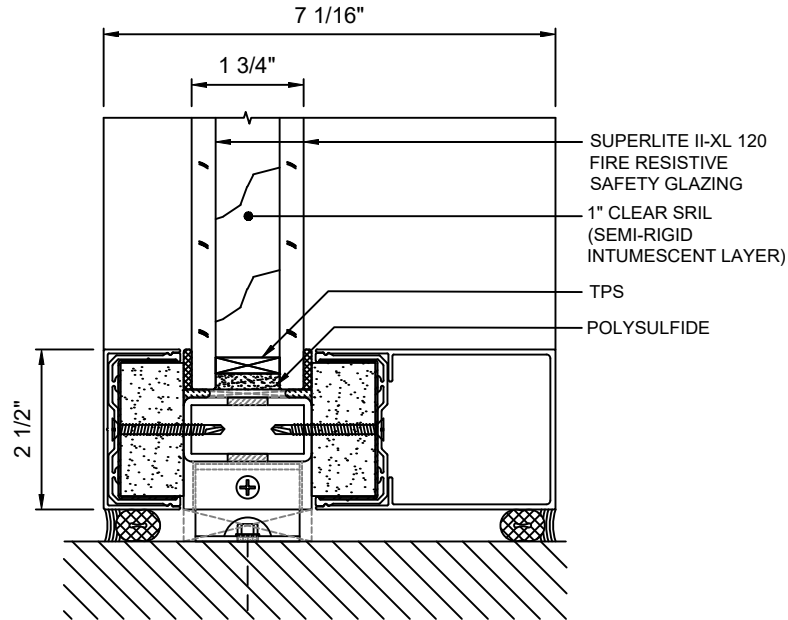


A SILL DETAIL
5 WITH **SUPERLITE II-XL 120**

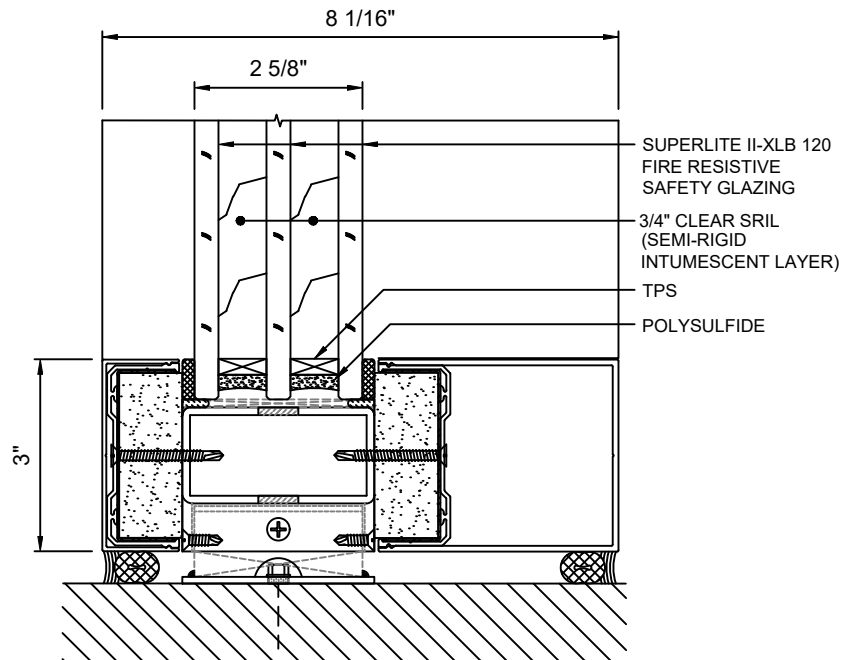


B SILL DETAIL
5 WITH **SUPERLITE II-XLB 120**

GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

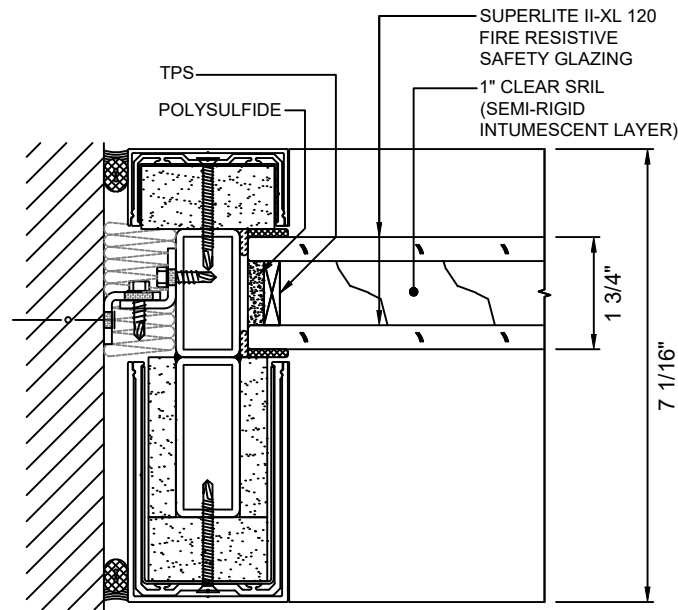


(A) JAMB DETAIL
6 WITH SUPERLITE II-XL 120

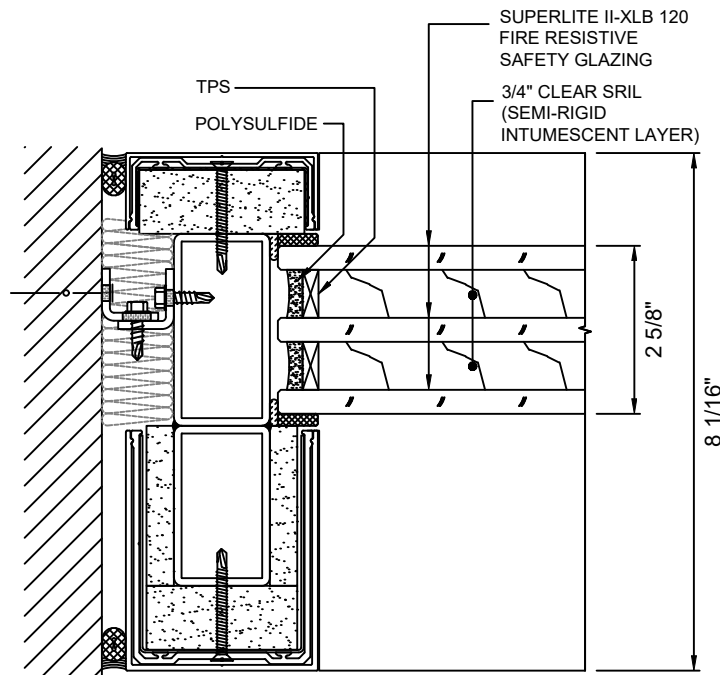


(B) JAMB DETAIL
6 WITH SUPERLITE II-XLB 120

GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* CURTAIN WALL

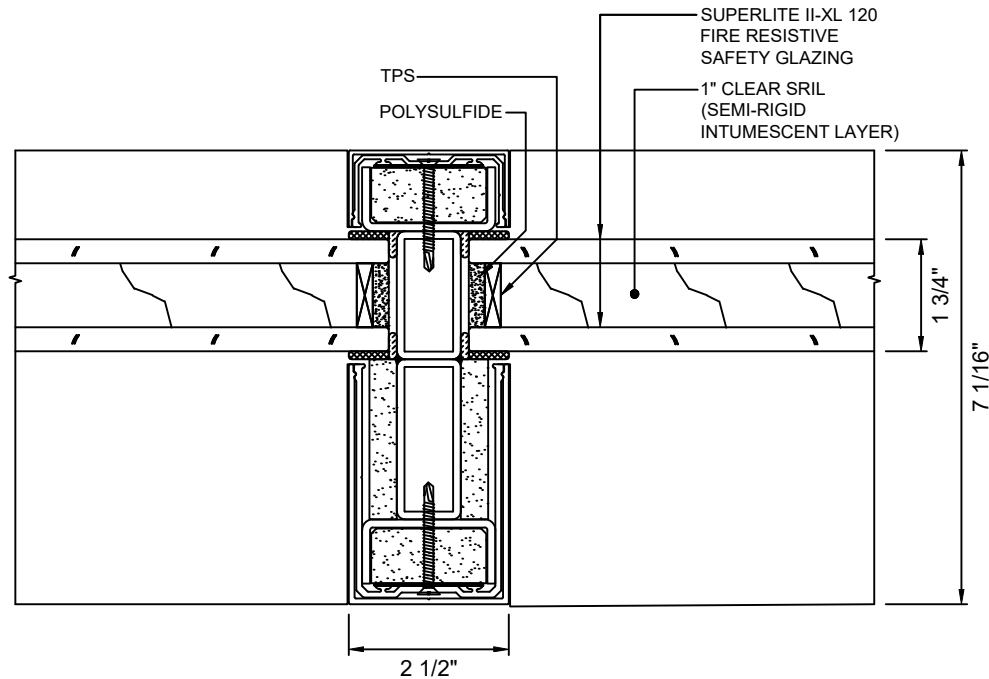


(A)
7 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XL 120**

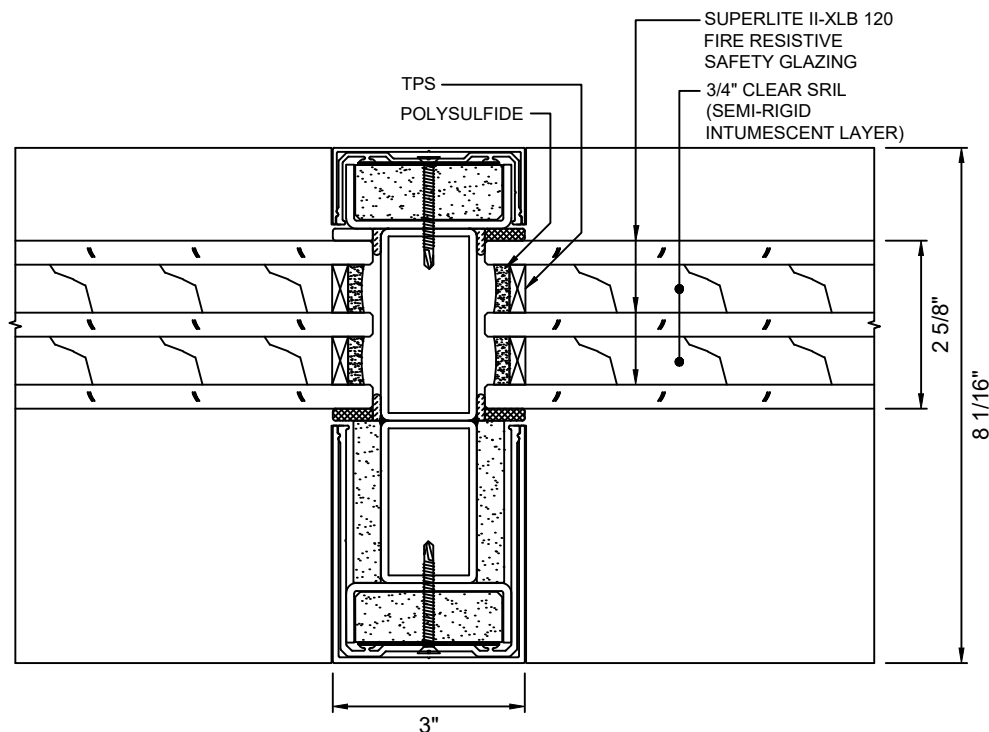


(B)
7 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XLB 120**

GPX CURTAINWALL SYSTEM

120 MINUTE FIRE RESISTIVE CURTAIN WALL

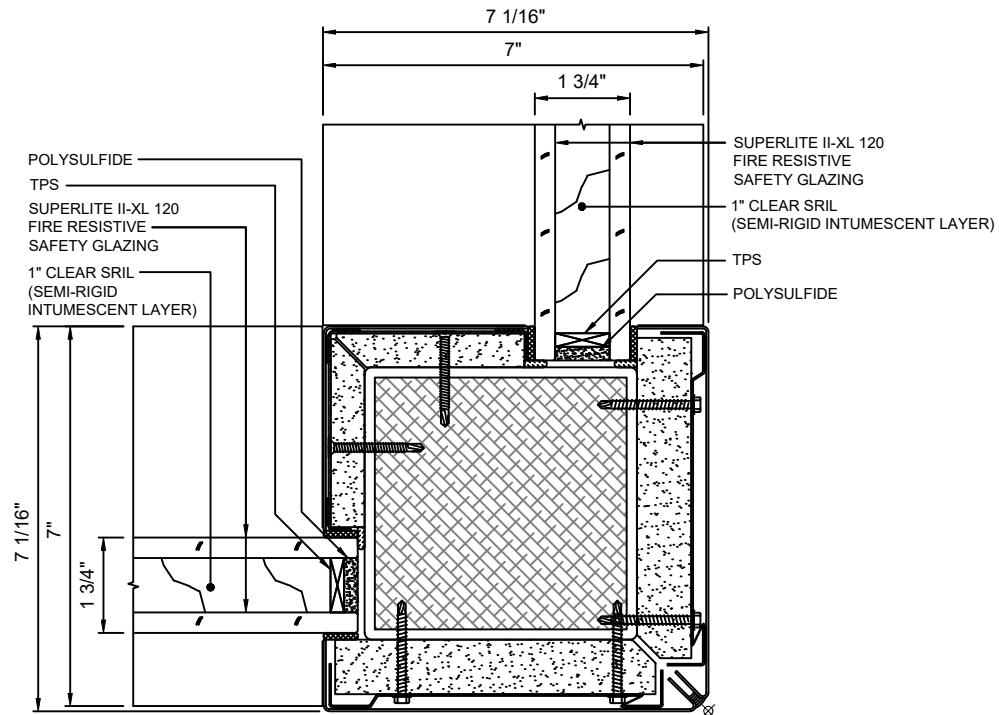

A
8 90° CORNER DETAIL
WITH SUPERLITE II-XL 120

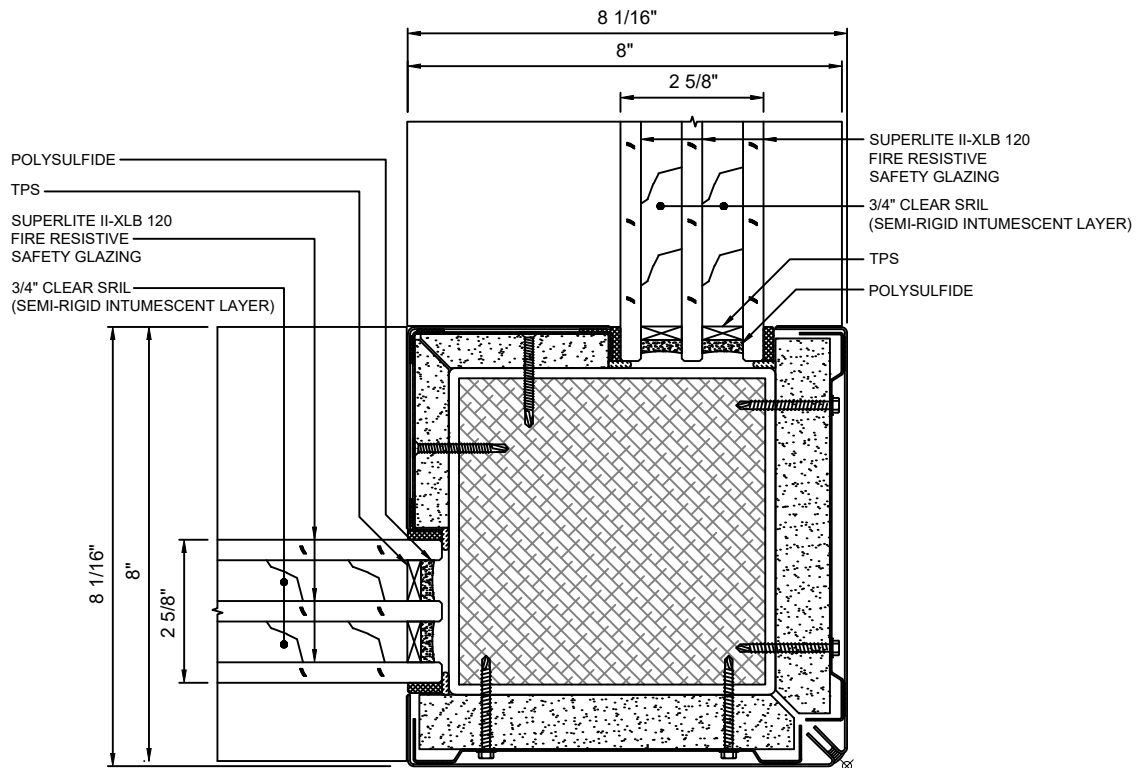


B
8 90° CORNER DETAIL
WITH SUPERLITE II-XLB 120

GPX CURTAINWALL SYSTEM


120 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

GPX BUILDERS SERIES DOOR NARROW STYLE

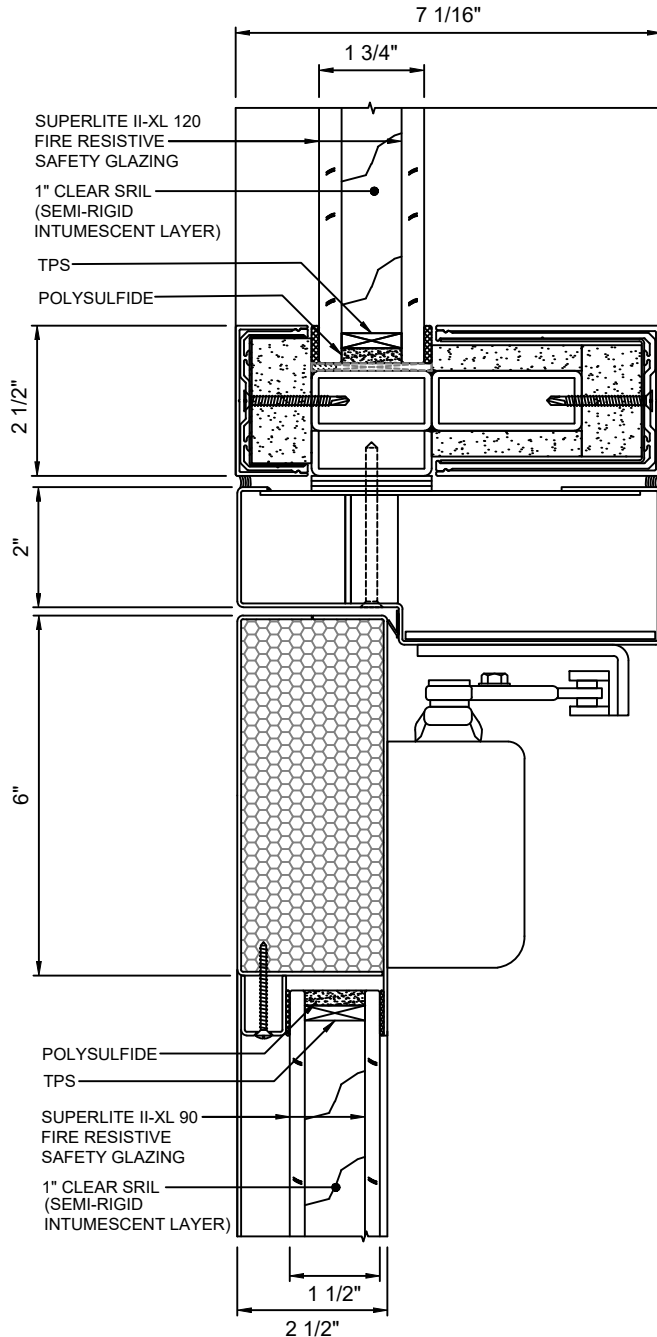

D DOOR TOP RAIL - STANDARD
9 WITH SUPERLITE II-XL 90 & II-XL 120

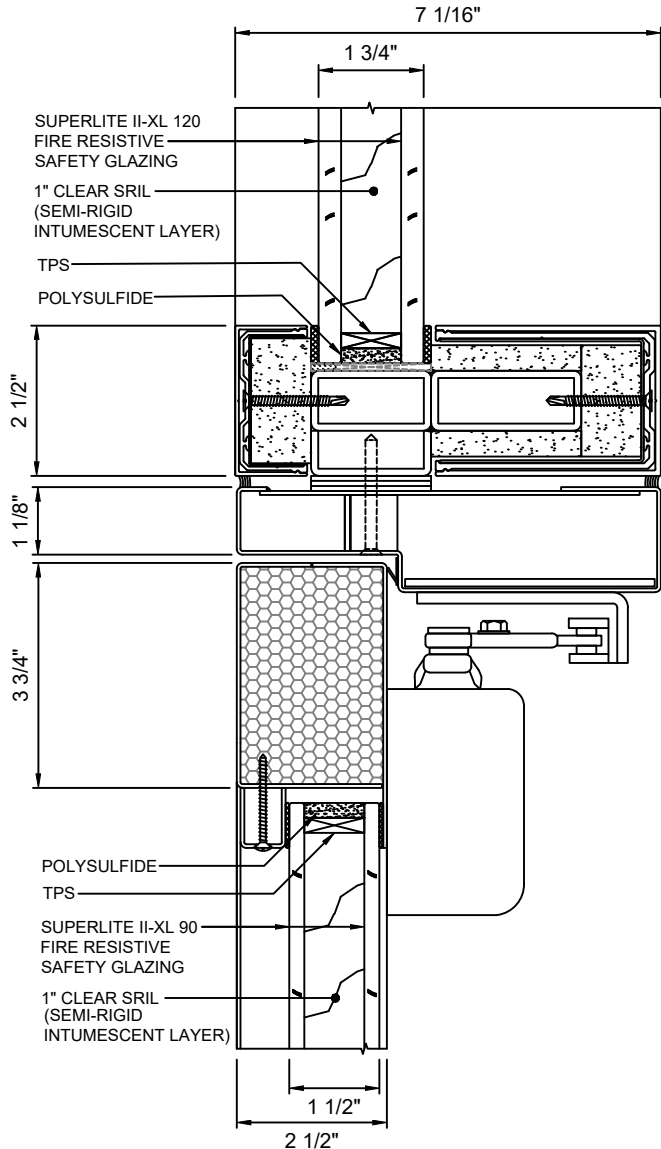



E DOOR TOP RAIL - NARROW STYLE
9 WITH SUPERLITE II-XL 90 & II-XL 120

GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES *TEMPERATURE RISE* DOORS

GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM


GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

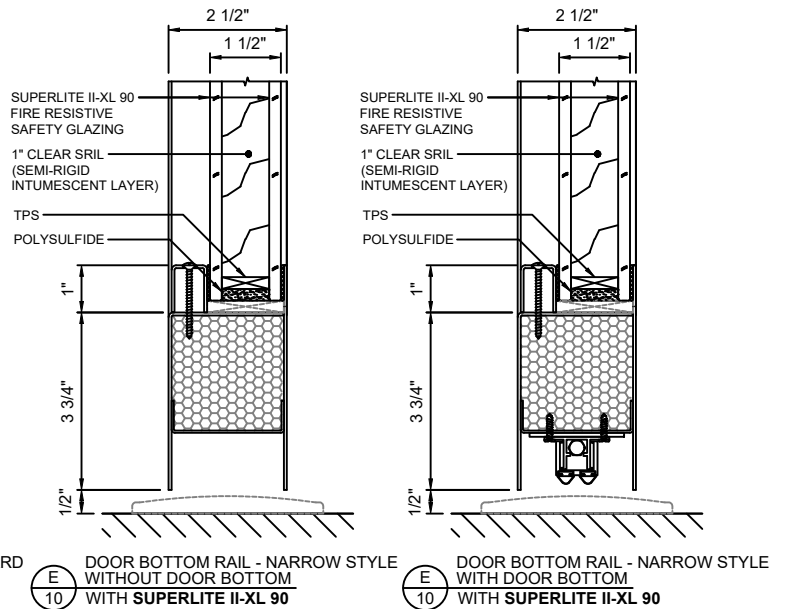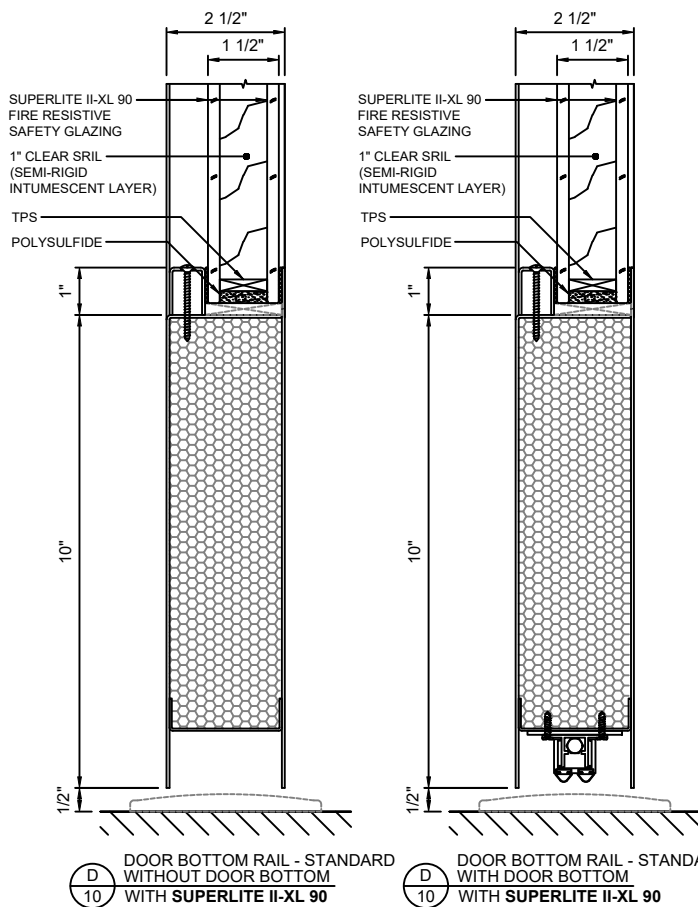

GPX CURTAINWALL SYSTEM


120 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES *TEMPERATURE RISE* DOORS

GPX BUILDERS SERIES DOOR STANDARD

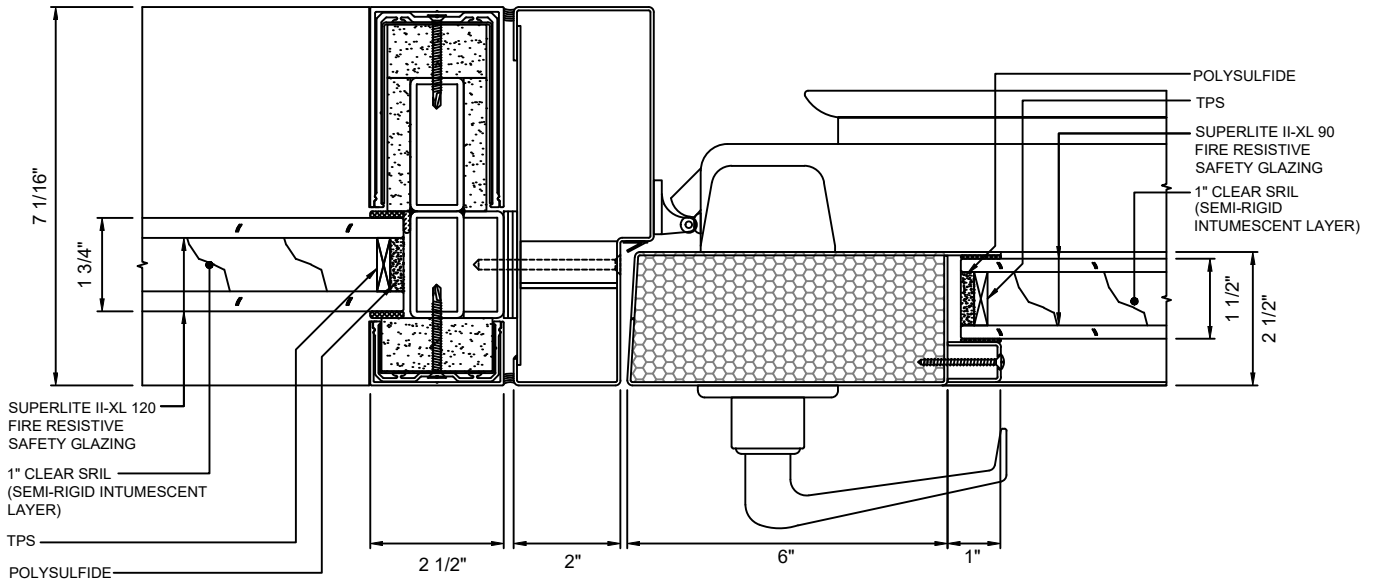

D DOOR JAMB AT LOCK - STANDARD
WITH SUPERLITE II-XL 90 & II-XL 120

GPX BUILDERS SERIES DOOR NARROW STYLE

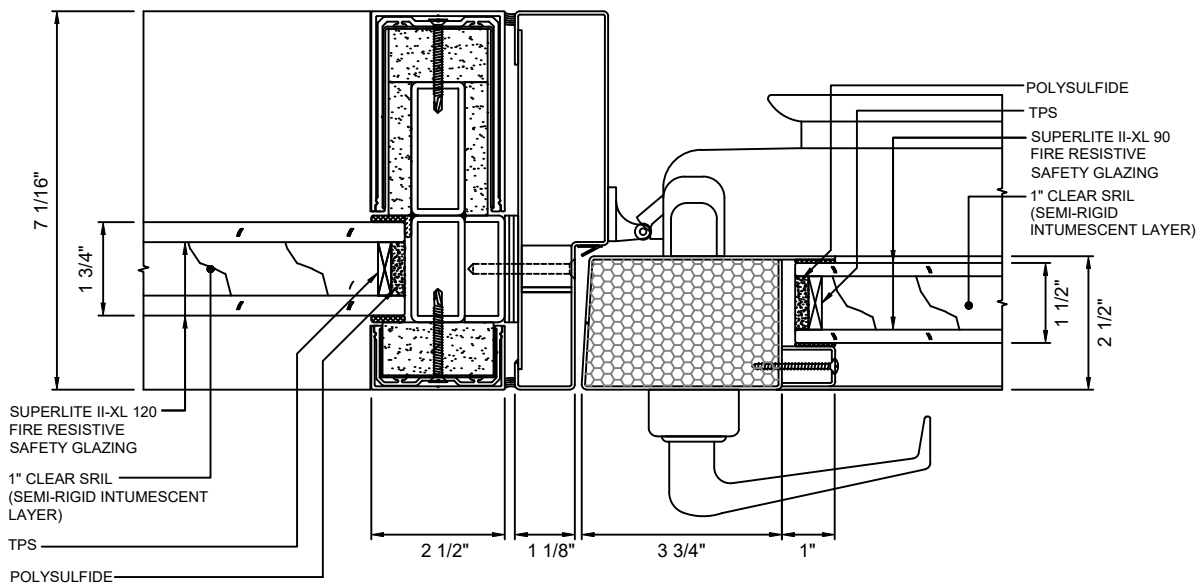


E DOOR JAMB AT LOCK - NARROW STYLE
WITH SUPERLITE II-XL 90 & II-XL 120


GPX CURTAINWALL SYSTEM

120 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES *TEMPERATURE RISE* DOORS

GPX BUILDERS SERIES DOOR STANDARD

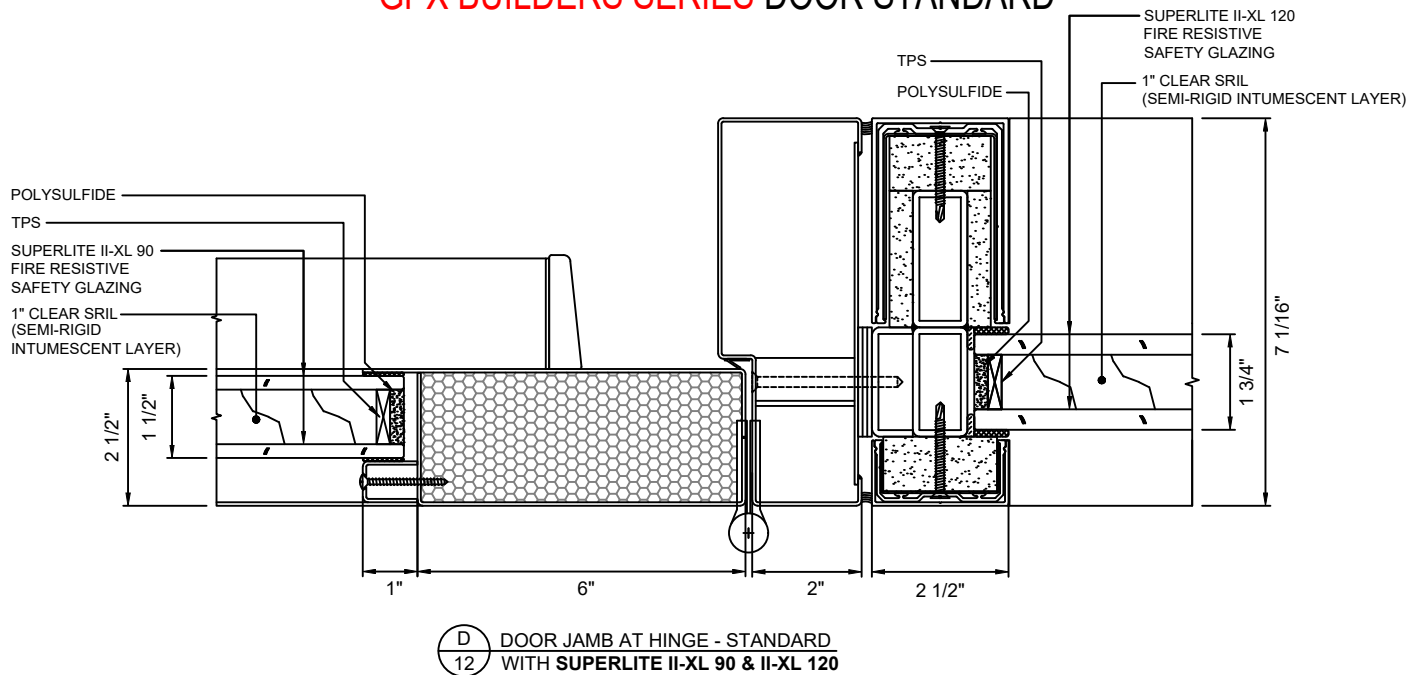


GPX BUILDERS SERIES DOOR NARROW STYLE

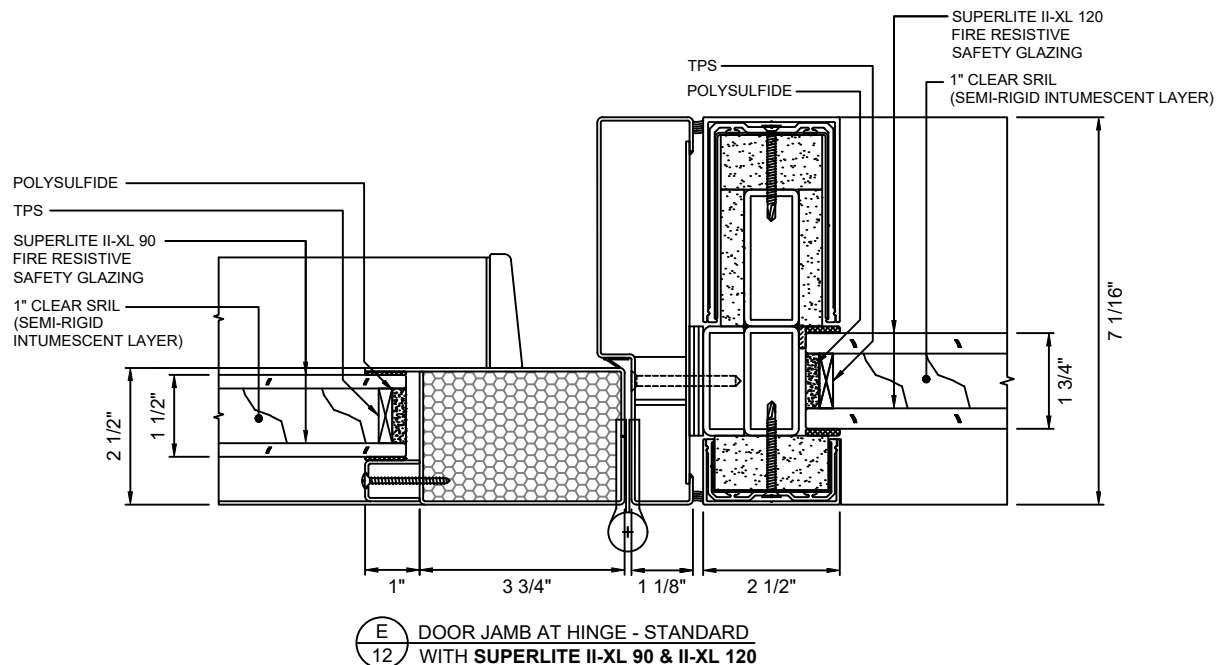

GPX CURTAINWALL SYSTEM


120 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 90 MINUTE GPX BUILDERS SERIES *TEMPERATURE RISE* DOORS

GPX BUILDERS SERIES DOOR STANDARD

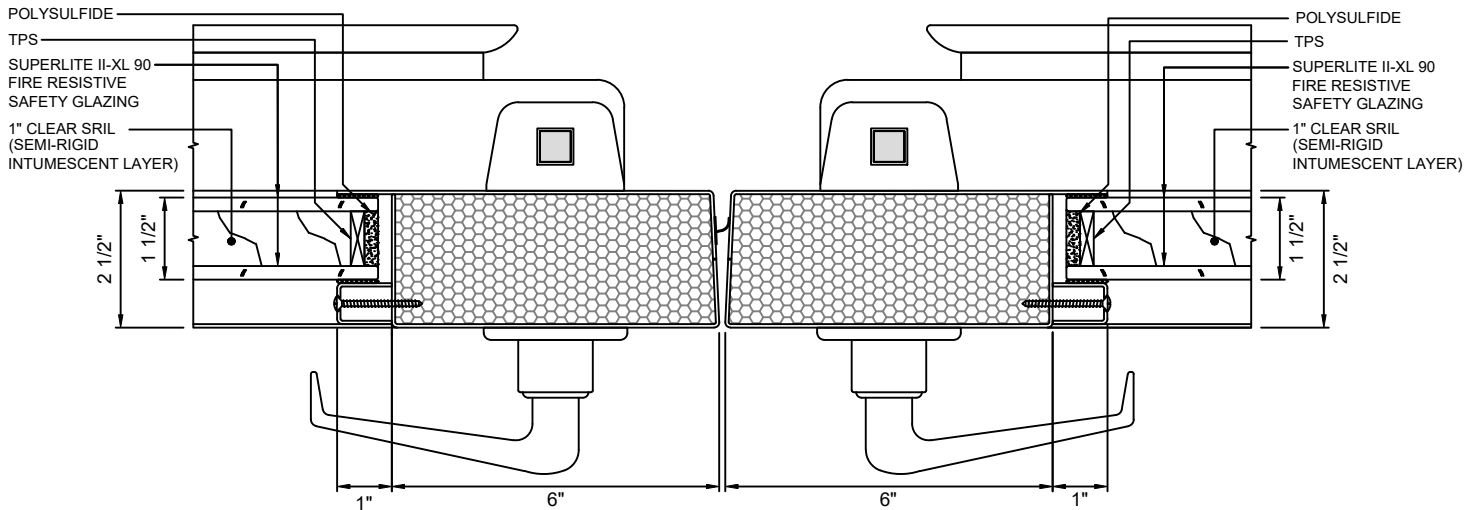

D MEETING STILES - STANDARD
13 WITH **SUPERLITE II-XL 90**

GPX BUILDERS SERIES DOOR NARROW STYLE

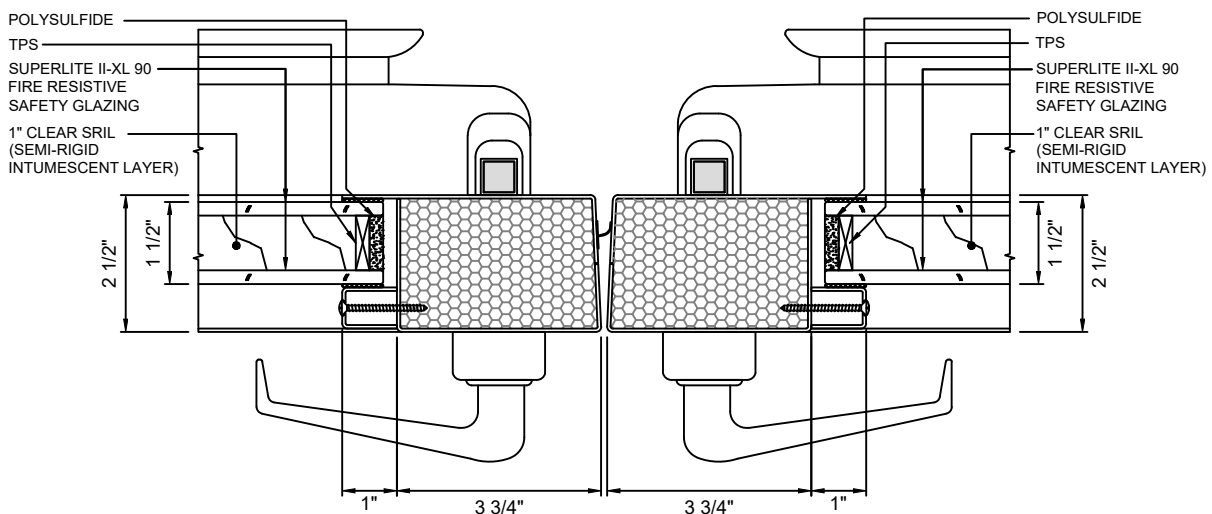

E MEETING STILES - NARROW STYLE
13 WITH **SUPERLITE II-XL 90**