


GPX ARCHITECTURAL SERIES


20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

GPX ARCHITECTURAL SERIES FIRE PROTECTIVE ALUMINUM SINGLE DOOR
WITH SUPERLITE I-20 IGU

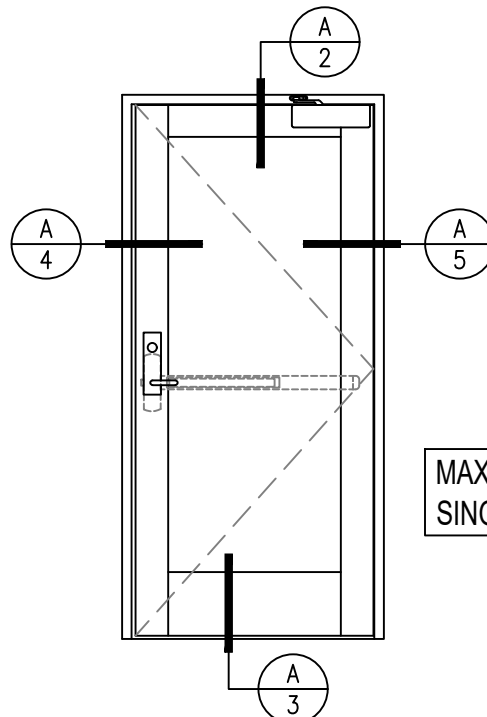

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES FIRE PROTECTIVE ALUMINUM PAIR DOOR
WITH SUPERLITE I-20 IGU

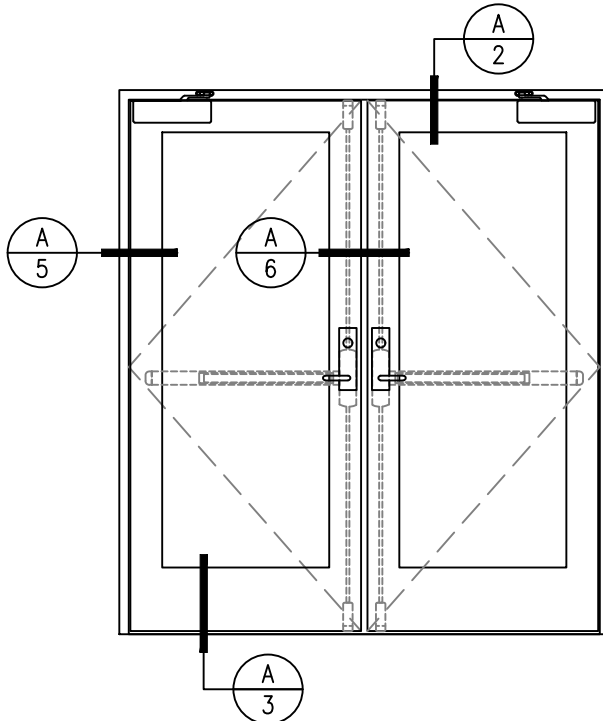

MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES

20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

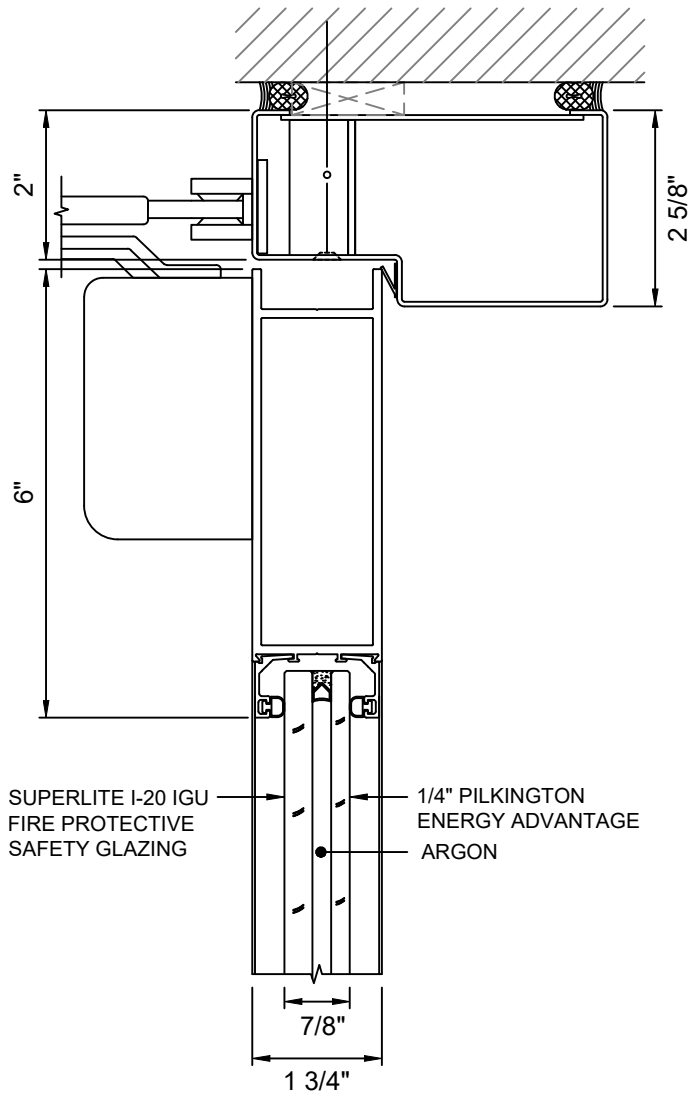


A
2 DOOR TOP RAIL
WITH SUPERLITE I-20 IGU


GPX ARCHITECTURAL SERIES

20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

WITH & WITHOUT DOOR BOTTOM

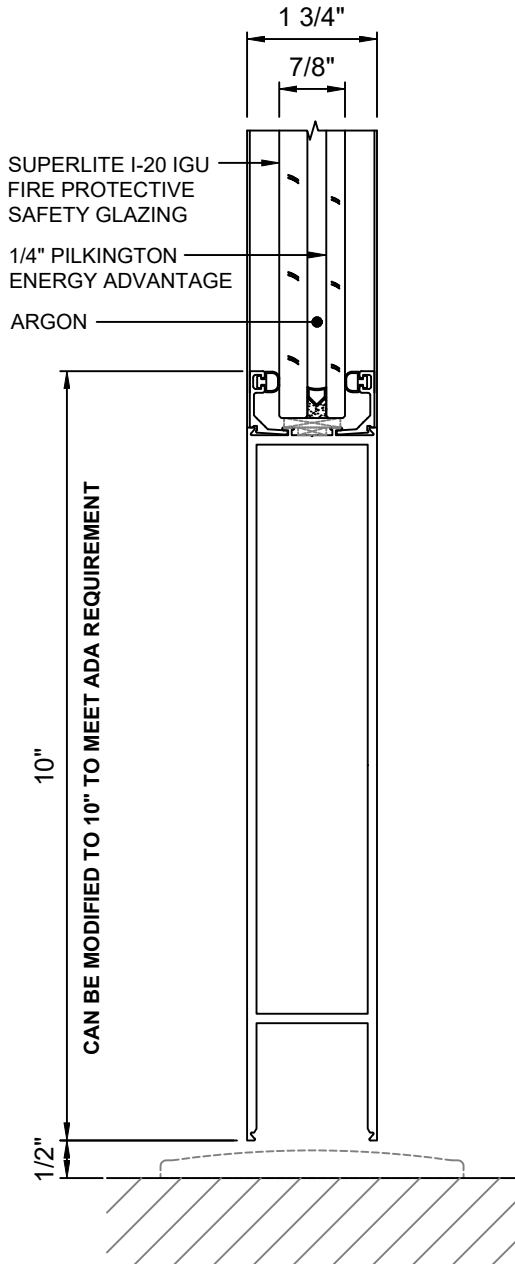


A
3
 DOOR BOTTOM RAIL
 WITHOUT DOOR BOTTOM
 WITH **SUPERLITE I-20 IGU**

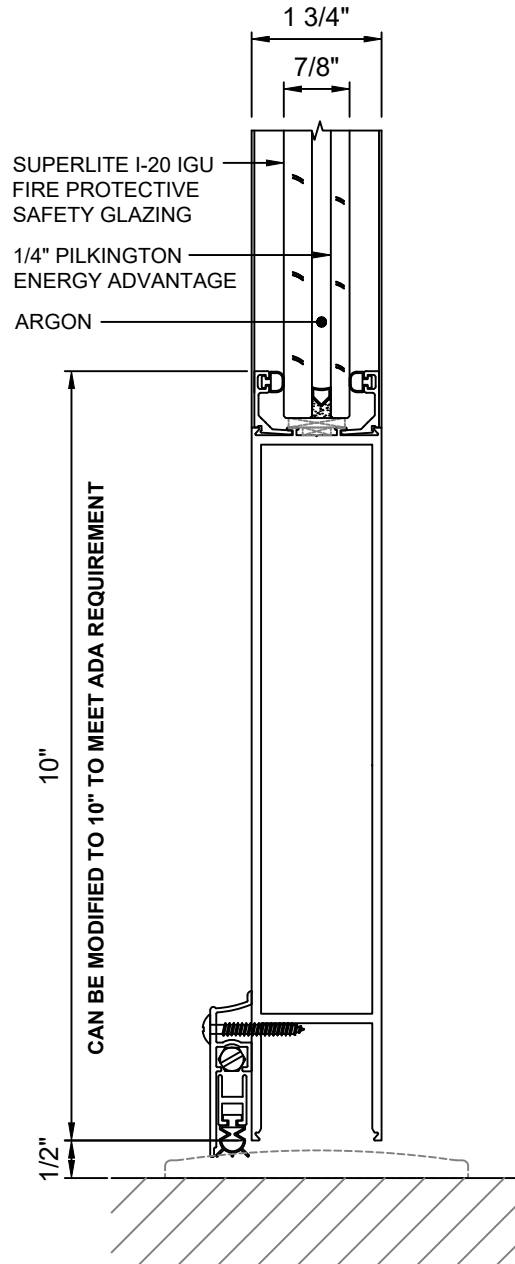

A
3
 DOOR BOTTOM RAIL
 WITH DOOR BOTTOM
 WITH **SUPERLITE I-20 IGU**

GPX ARCHITECTURAL SERIES


20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

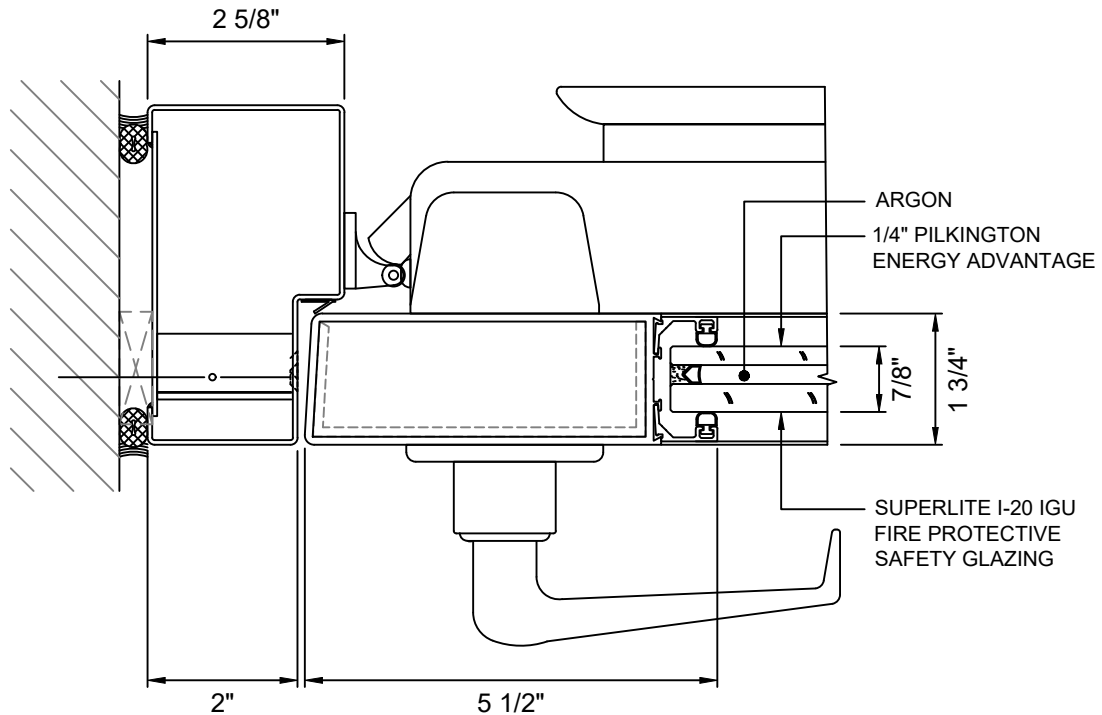

A
4
 DOOR JAMB AT LOCK
 WITH **SUPERLITE I-20 IGU**

GPX ARCHITECTURAL SERIES


20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

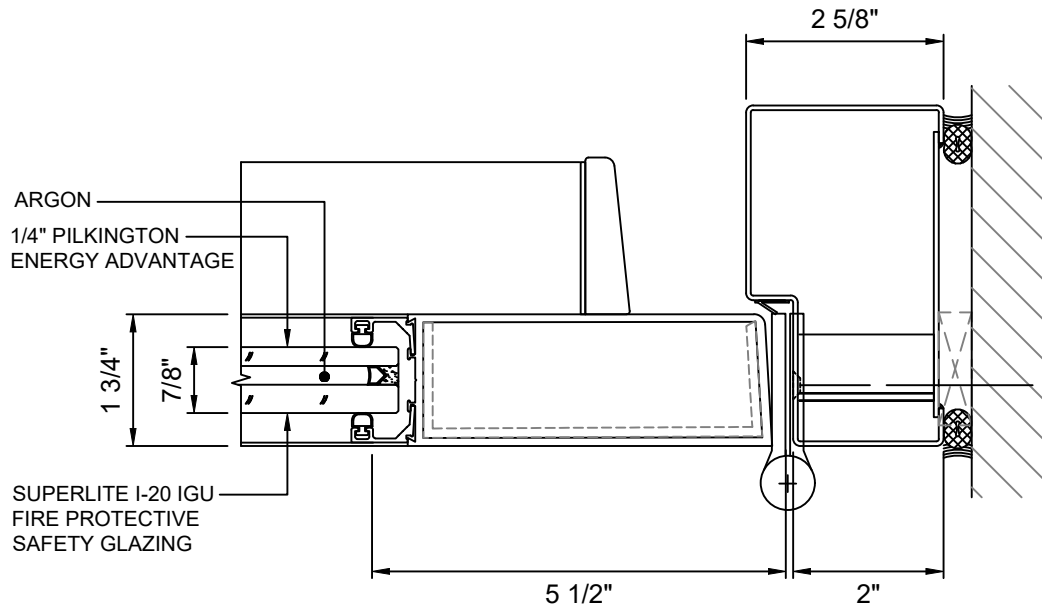

A
5
 DOOR JAMB AT HINGE
 WITH **SUPERLITE I-20 IGU**

GPX ARCHITECTURAL SERIES

20 MINUTE FIRE PROTECTIVE ALUMINUM DOORS

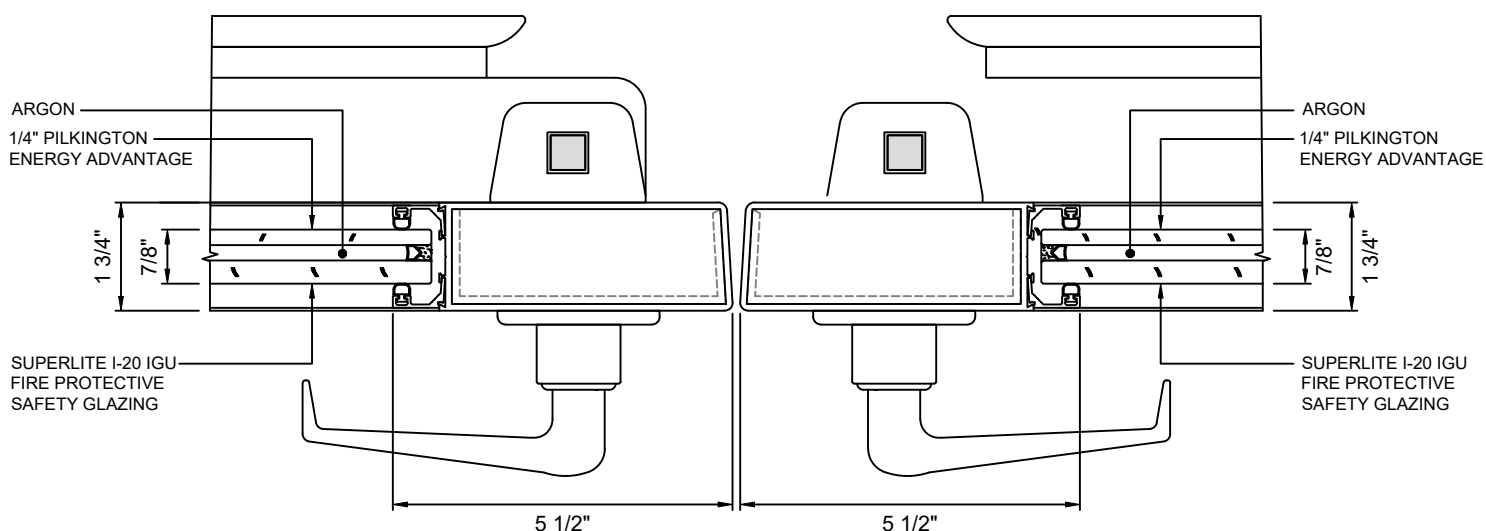

A MEETING STILES
6 WITH **SUPERLITE I-20 IGU**