


GPX EZ FRAME

45 MINUTE *FIRE PROTECTIVE* OPENING

GPX EZ FRAME WITH SUPERCLEAR 45-HS-LI

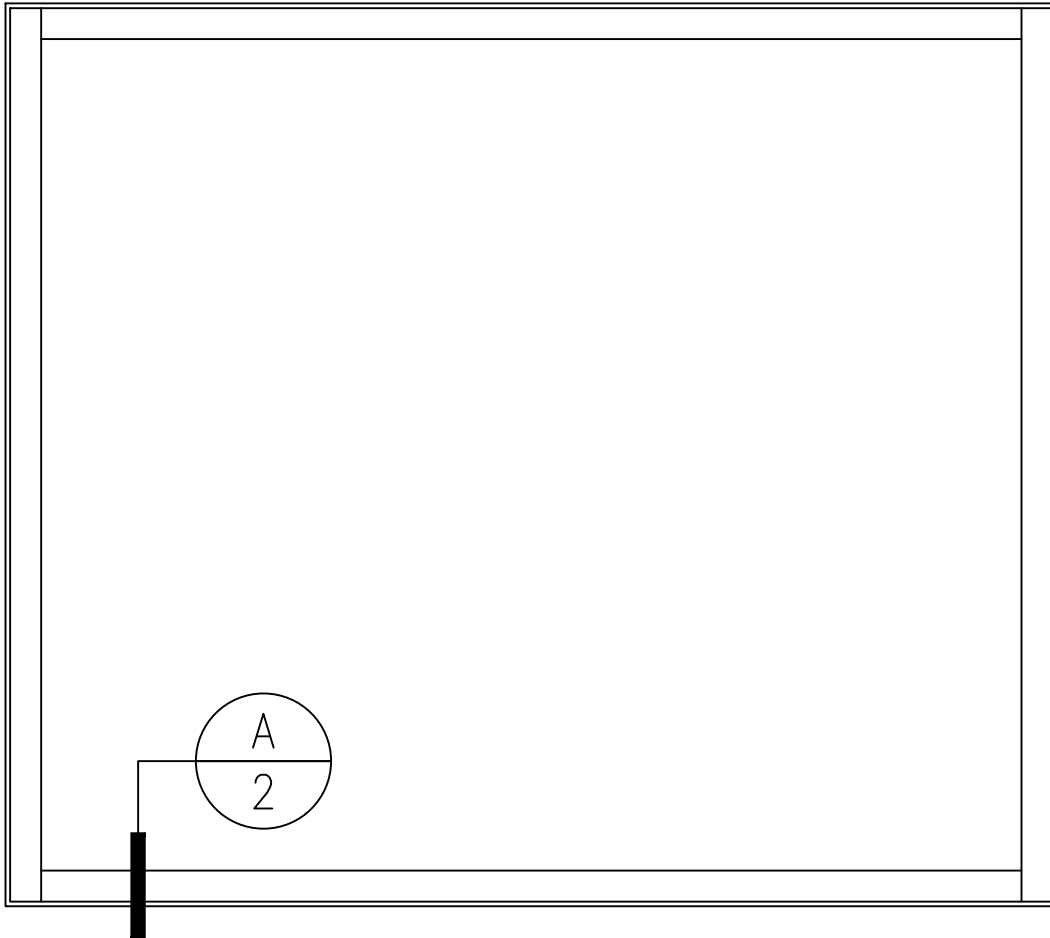


GLASS TYPE

SUPERCLEAR 45-HS-LI


(A) MAX. CV AREA PER INDIVIDUAL LITE: **3,880 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **96 IN.**

GPX EZ FRAME


45 MINUTE FIRE PROTECTIVE OPENING

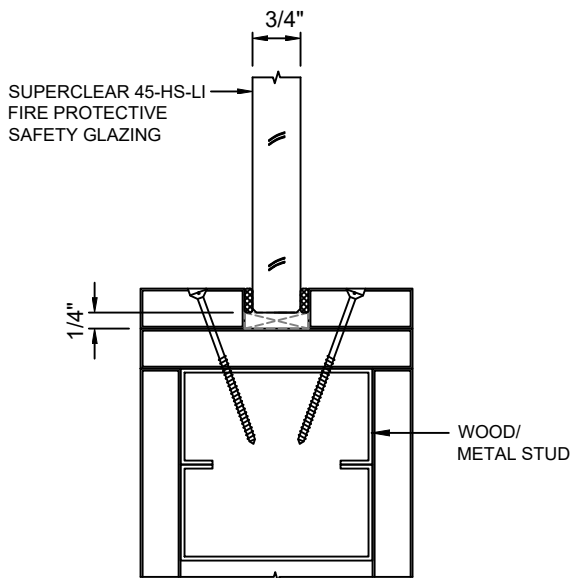

A
2.1 SILL DETAIL ON WOOD OR METAL STUD
WITH **SUPERCLEAR 45-HS-LI**

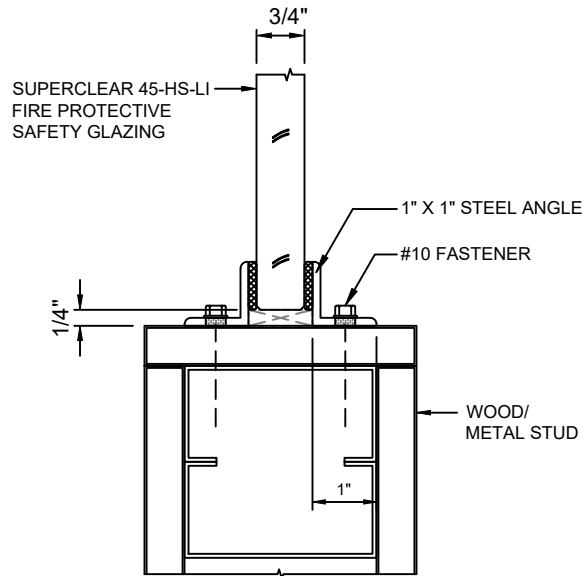

A
2.2 SILL DETAIL WITH STEEL ANGLES
ON WOOD OR METAL STUD
WITH **SUPERCLEAR 45-HS-LI**

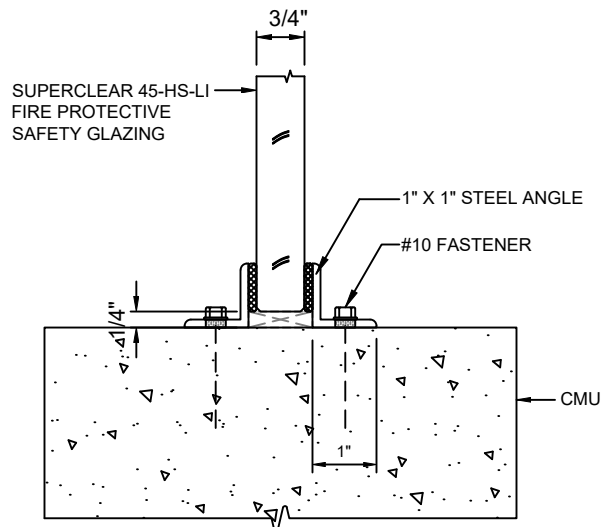

A
2.3 SILL DETAIL WITH STEEL ANGLES
WITH **SUPERCLEAR 45-HS-LI**