


GPX ARCHITECTURAL SERIES

45 MINUTE *FIRE PROTECTIVE* / *FIRE RESISTIVE* GPX OPENINGS

SHOWN WITH SUPERCLEAR 45-HS-LI AND SUPERLITE II-XL 45

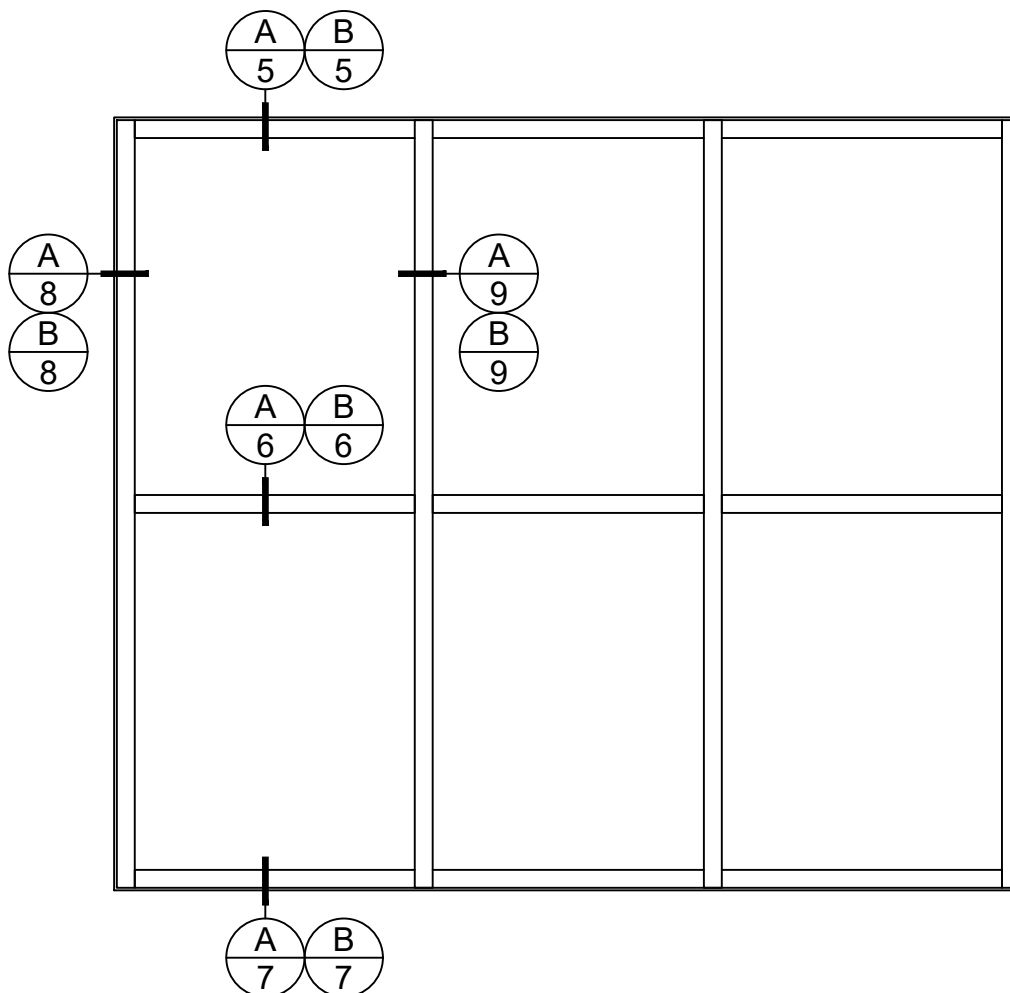

FIRE PROTECTIVE OPENING GLASS TYPE

- (A) SUPERCLEAR 45-HS-LI
MAX. CV AREA PER INDIVIDUAL
LITE: 3,880 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: 96 IN.


FIRE RESISTIVE OPENING GLASS TYPE

- (B) SUPERLITE II-XL 45
MAX. CV AREA PER INDIVIDUAL
LITE: 4,952 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: 124 IN.

GPX ARCHITECTURAL SERIES

45 MINUTE *FIRE PROTECTIVE* GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES *FIRE PROTECTIVE* DOORS

GPX BUILDERS SERIES *FIRE PROTECTIVE* SINGLE DOOR WITH **SUPERLITE I-20**

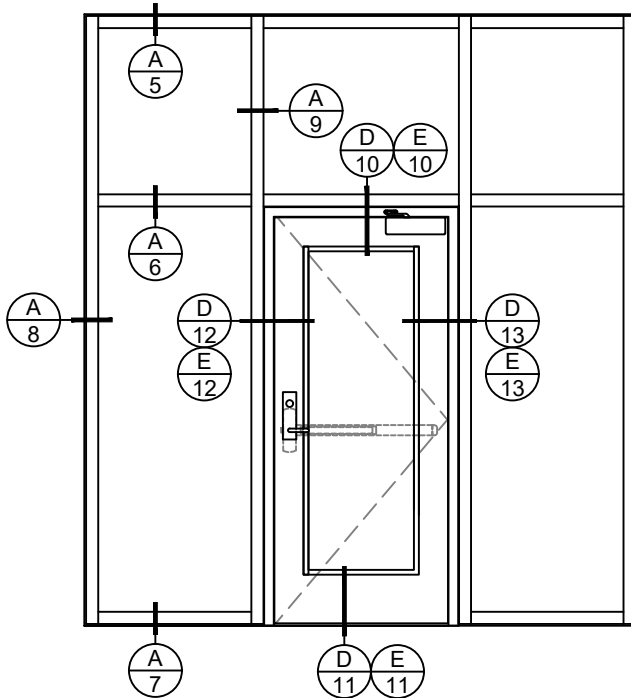


MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 54 IN. X 120 IN.

(D) STANDARD PROFILE
(E) NARROW PROFILE

SHOWN WITH SUPERLITE I-20
(DOOR) AND SUPERCLEAR 45-HS-LI
(SIDELITE/ TRANSOM). OTHER
APPROVED GLAZING AVAILABLE BY
CALLING SAFTIFIRST.

GPX BUILDERS SERIES *FIRE PROTECTIVE* PAIR DOOR WITH **SUPERLITE I-20**

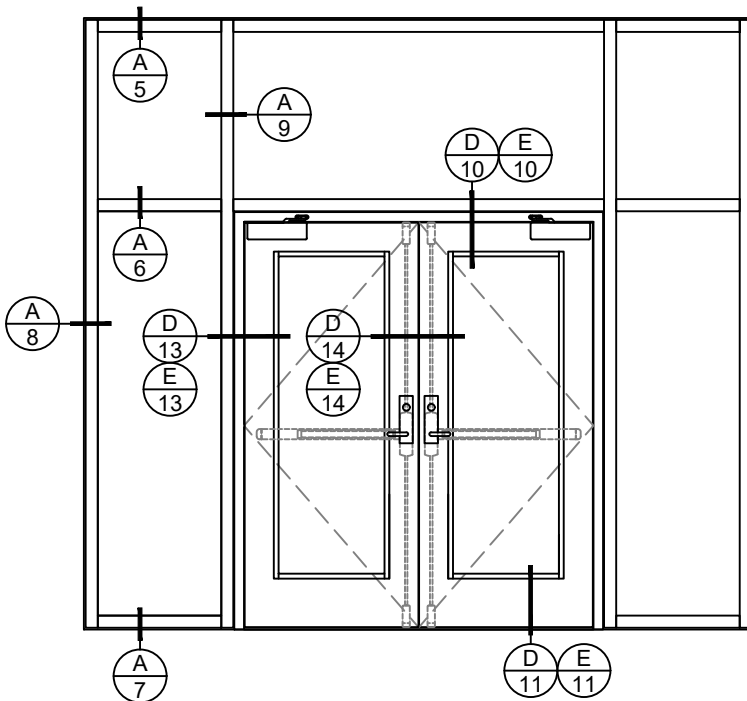

MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 120 IN.


(D) STANDARD PROFILE
(E) NARROW PROFILE

SHOWN WITH SUPERLITE I-20
(DOOR) AND SUPERCLEAR 45-HS-LI
(SIDELITE/ TRANSOM). OTHER
APPROVED GLAZING AVAILABLE BY
CALLING SAFTIFIRST.

GPX ARCHITECTURAL SERIES

45 MINUTE *FIRE PROTECTIVE* GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES *FIRE PROTECTIVE* DOORS


GPX ARCHITECTURAL SERIES *FIRE PROTECTIVE* SINGLE DOOR WITH SUPERLITE I-20

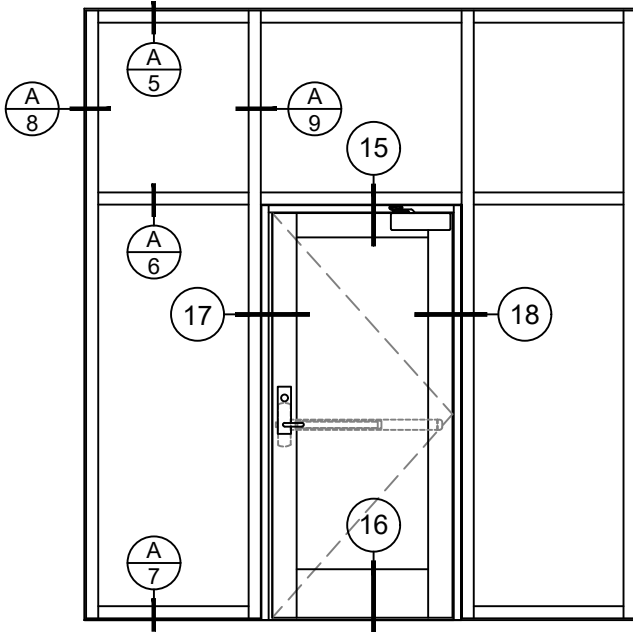

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.

SHOWN WITH SUPERLITE I-20
(DOOR) AND SUPERCLEAR 45-HS-LI
(SIDELITE/ TRANSOM). OTHER
APPROVED GLAZING AVAILABLE BY
CALLING SAFTIFIRST.

GPX ARCHITECTURAL SERIES *FIRE PROTECTIVE* PAIR DOOR WITH SUPERLITE I-20

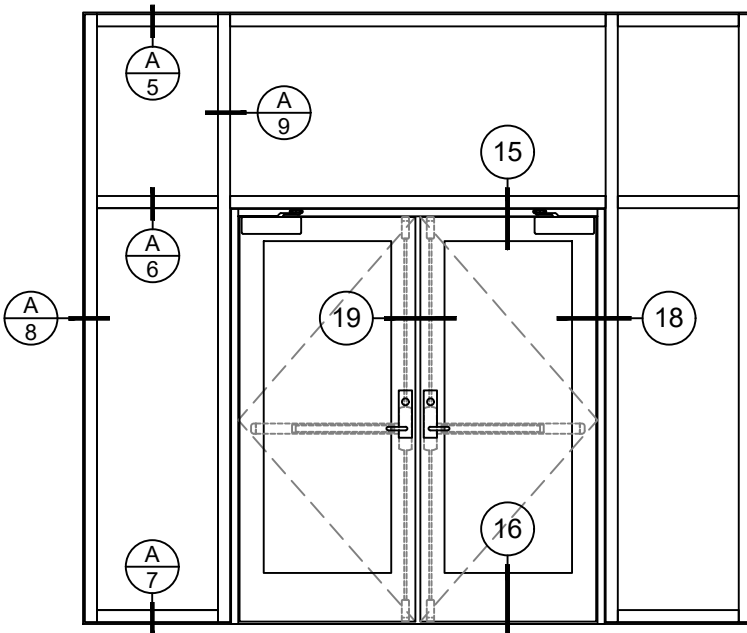


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 108 IN.

SHOWN WITH SUPERLITE I-20
(DOOR) AND SUPERCLEAR 45-HS-LI
(SIDELITE/ TRANSOM). OTHER
APPROVED GLAZING AVAILABLE BY
CALLING SAFTIFIRST.

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 45 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOORS

GPX BUILDERS SERIES FIRE PROTECTIVE SINGLE DOOR WITH SUPERCLEAR 45-HS-LI

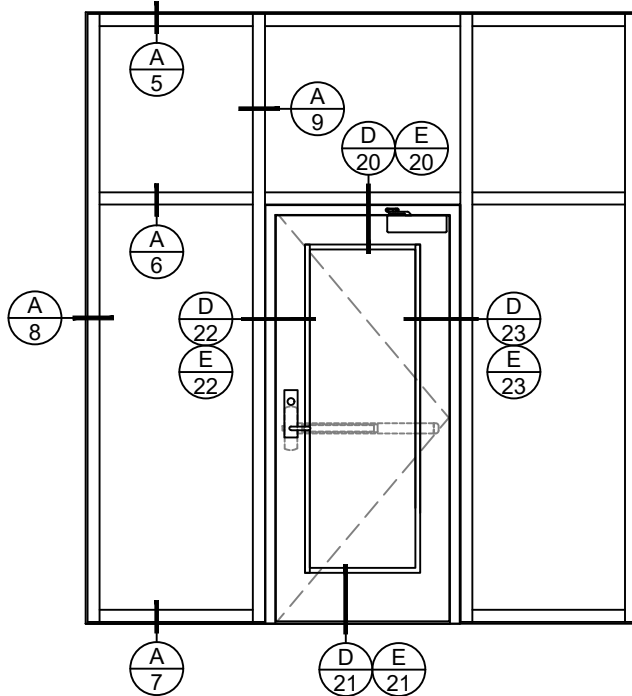


MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 54 IN. X 120 IN.

(D) STANDARD PROFILE
(E) NARROW PROFILE

SHOWN WITH SUPERCLEAR 45-HS-LI
OTHER APPROVED GLAZING
AVAILABLE BY CALLING SAFTIFIRST.

GPX BUILDERS SERIES FIRE PROTECTIVE PAIR DOOR WITH SUPERCLEAR 45-HS-LI

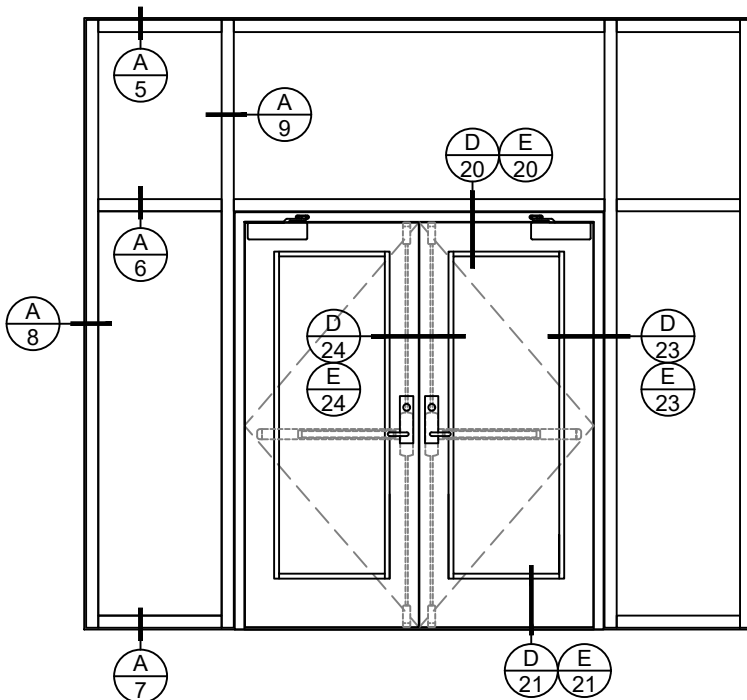


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 120 IN.

(D) STANDARD PROFILE
(E) NARROW PROFILE


SHOWN WITH SUPERCLEAR 45-HS-LI
OTHER APPROVED GLAZING
AVAILABLE BY CALLING SAFTIFIRST.

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE / FIRE RESISTIVE WALL / WINDOW

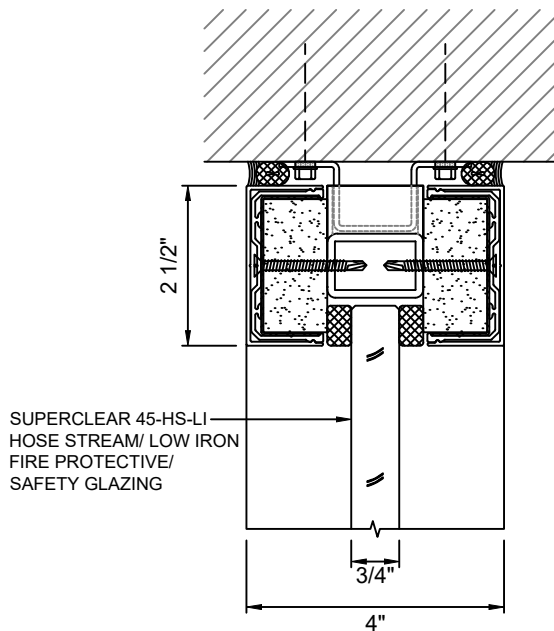


A
5 HEAD DETAIL
WITH SUPERCLEAR 45-HS-LI

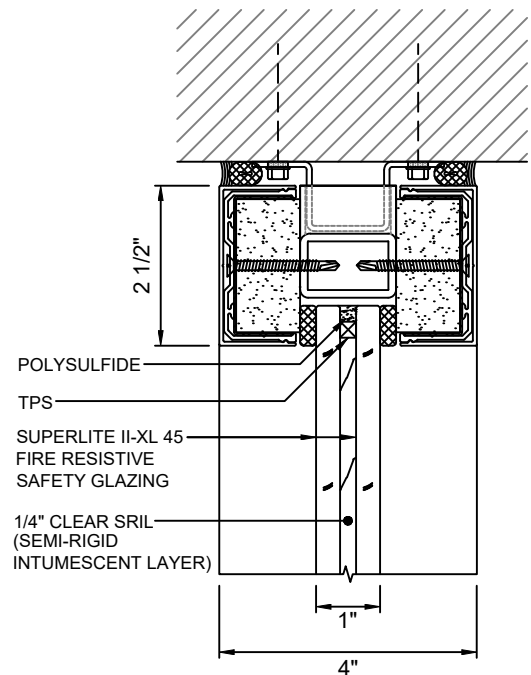


B
5 HEAD DETAIL
WITH SUPERLITE II-XL 45

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE / FIRE RESISTIVE WALL / WINDOW

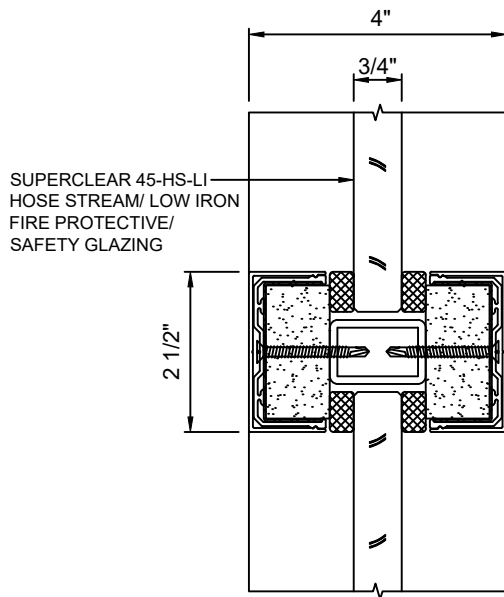


A
6 HORIZONTAL MULLION
WITH SUPERCLEAR 45-HS-LI

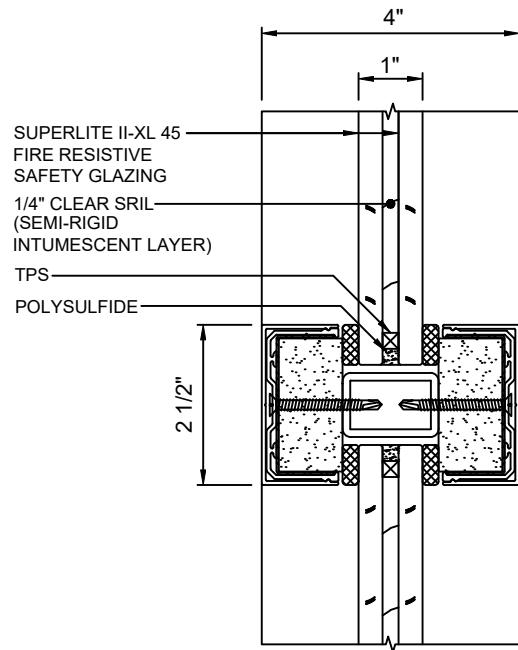


B
6 HORIZONTAL MULLION
WITH SUPERLITE II-XL 45

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE / FIRE RESISTIVE WALL/ WINDOW

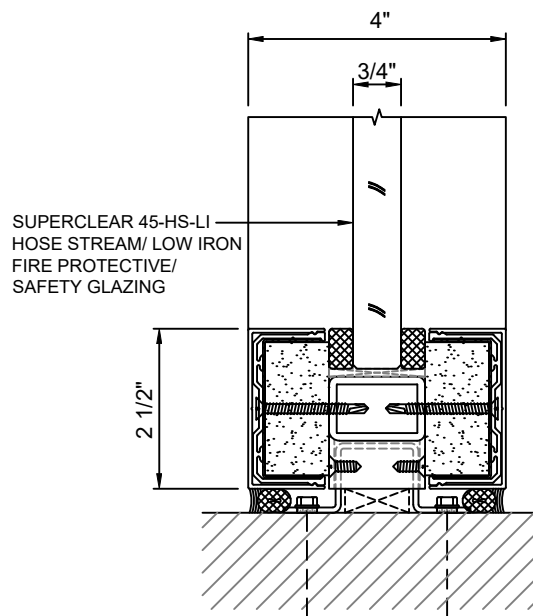


A
7 SILL DETAIL
WITH SUPERCLEAR 45-HS-LI

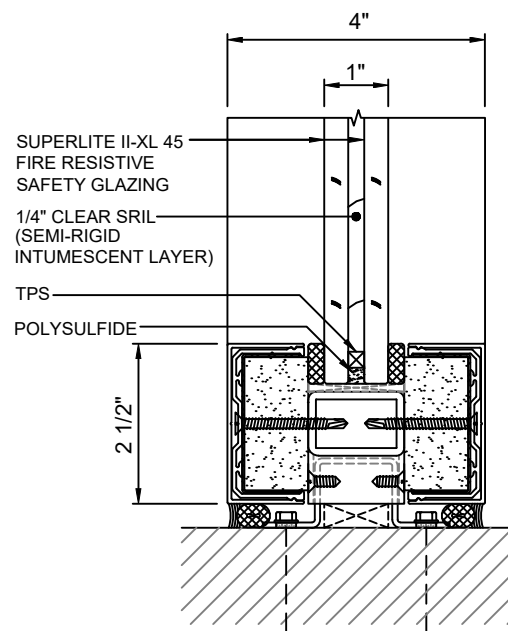


B
7 SILL DETAIL
WITH SUPERLITE II-XL 45

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE / FIRE RESISTIVE WALL / WINDOW

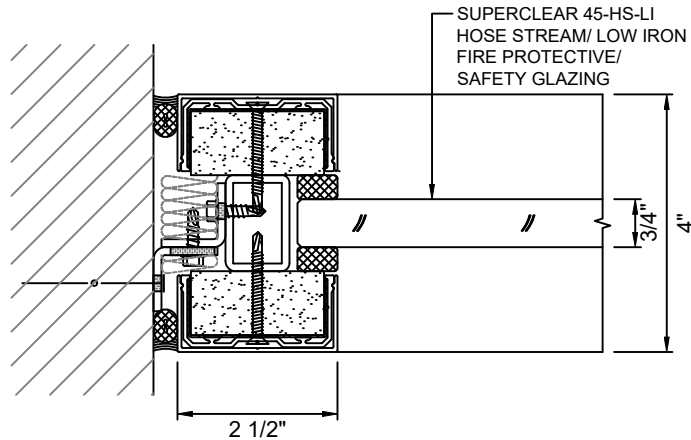


A
8 JAMB DETAIL
WITH SUPERCLEAR 45-HS-LI

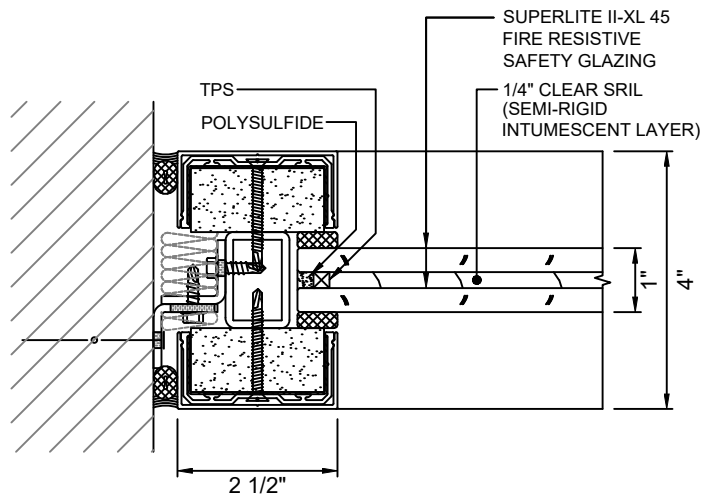


B
8 JAMB DETAIL
WITH SUPERLITE II-XL 45

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE / FIRE RESISTIVE WALL / WINDOW

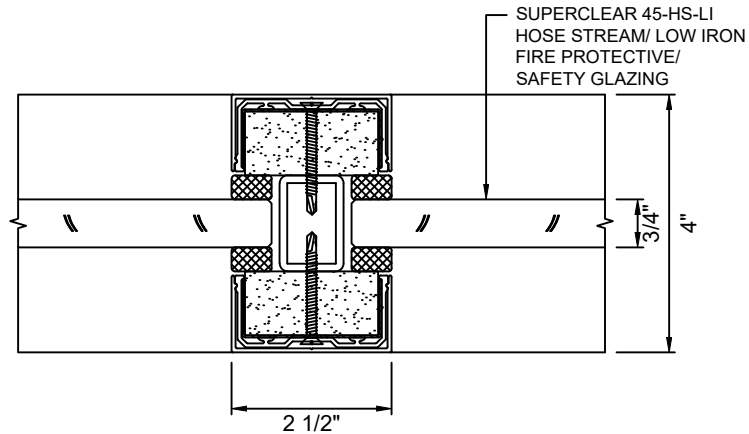

A
9 VERTICAL MULLION
WITH SUPERCLEAR 45-HS-LI

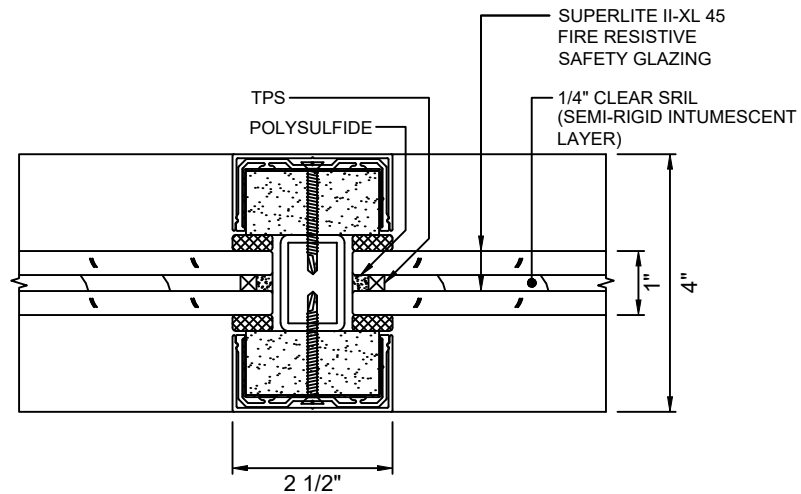


B
9 VERTICAL MULLION
WITH SUPERLITE II-XL 45

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

GPX BUILDERS SERIES DOOR NARROW STYLE

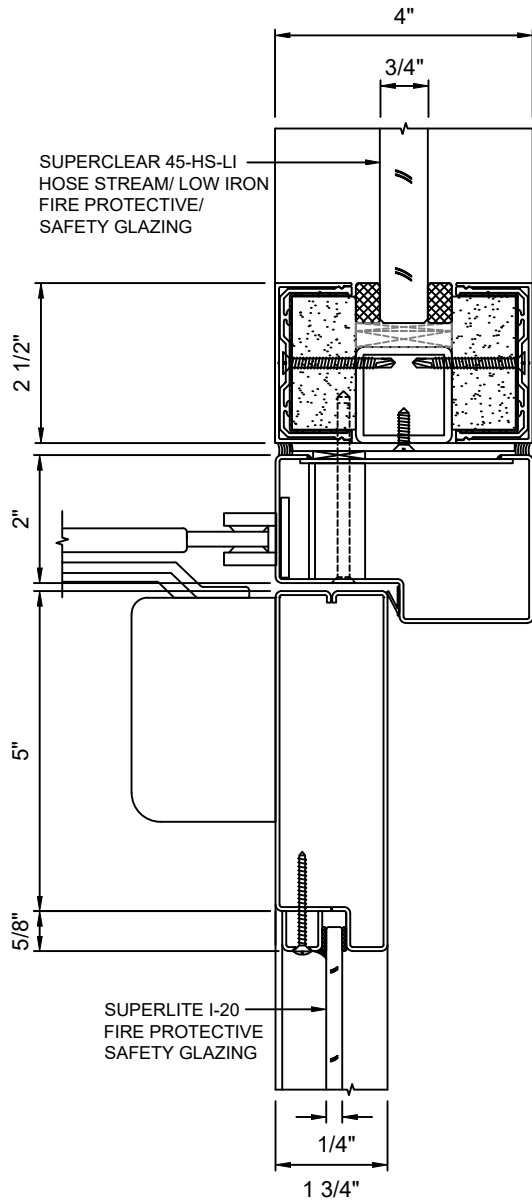

D DOOR TOP RAIL - STANDARD
10 WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

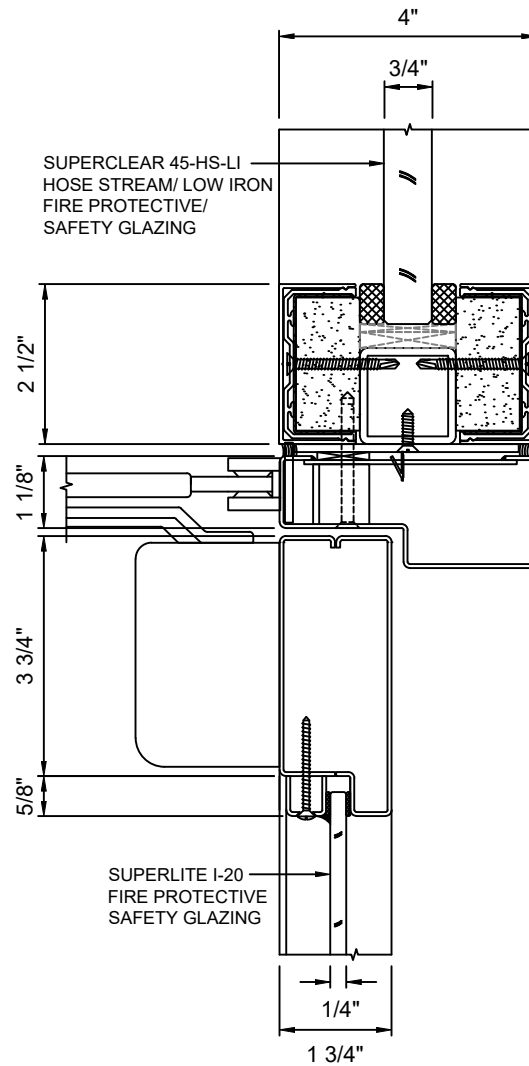


E DOOR TOP RAIL - NARROW STYLE
10 WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM


GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

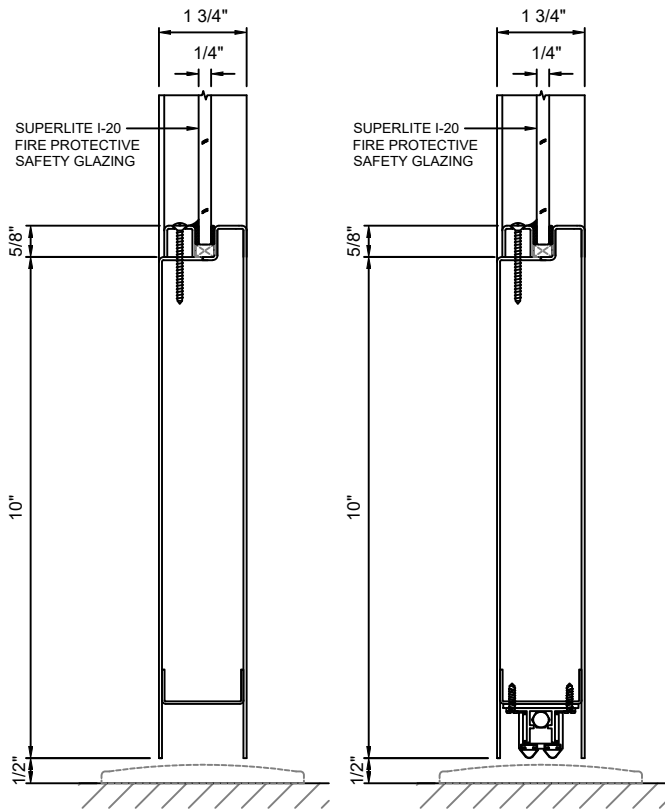


D
11 DOOR BOTTOM RAIL - STANDARD
WITHOUT DOOR BOTTOM
WITH SUPERLITE I-20

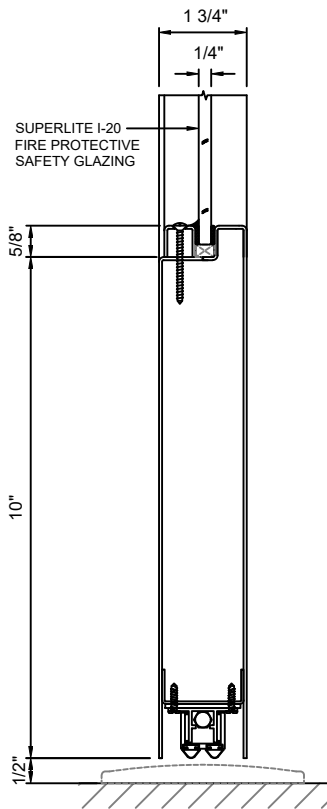

D
11 DOOR BOTTOM RAIL - STANDARD
WITH DOOR BOTTOM
WITH SUPERLITE I-20

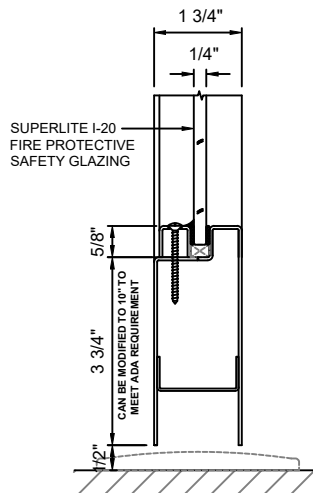

E
11 DOOR BOTTOM RAIL - NARROW STYLE
WITHOUT DOOR BOTTOM
WITH SUPERLITE I-20

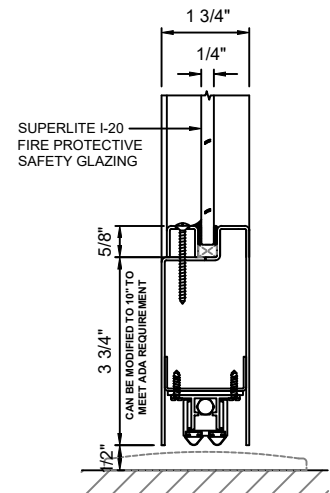


E
11 DOOR BOTTOM RAIL - NARROW STYLE
WITH DOOR BOTTOM
WITH SUPERLITE I-20

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

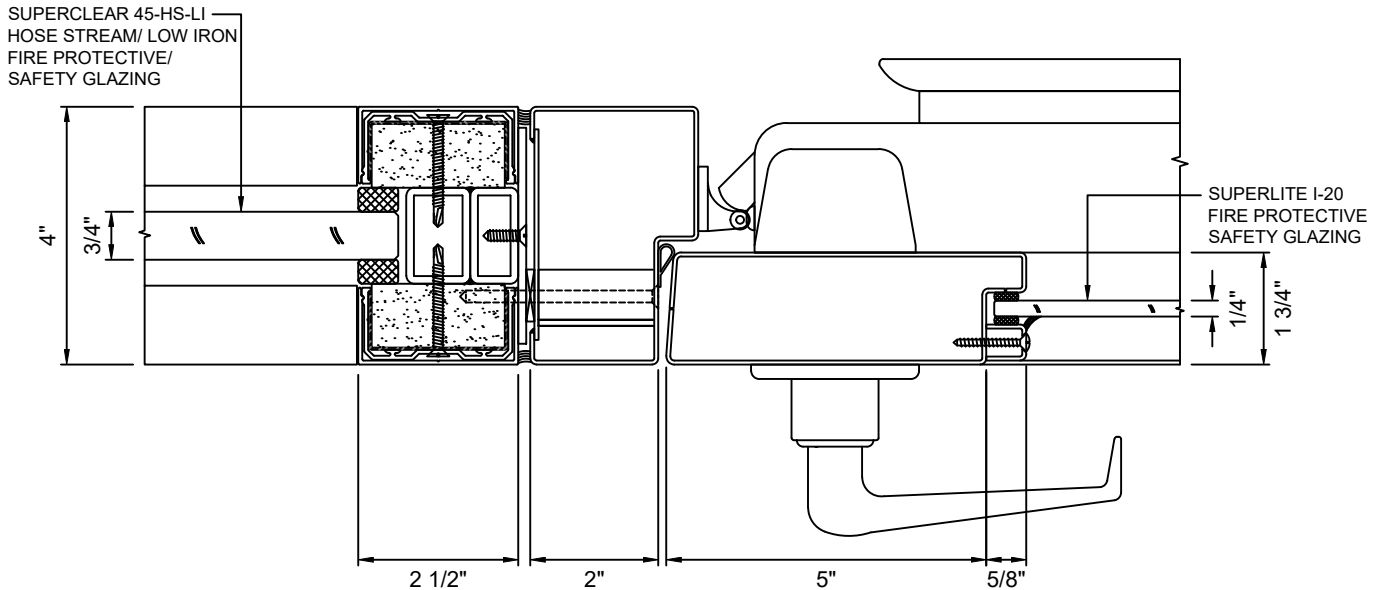

D DOOR JAMB AT LOCK - STANDARD
WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

GPX BUILDERS SERIES DOOR NARROW STYLE

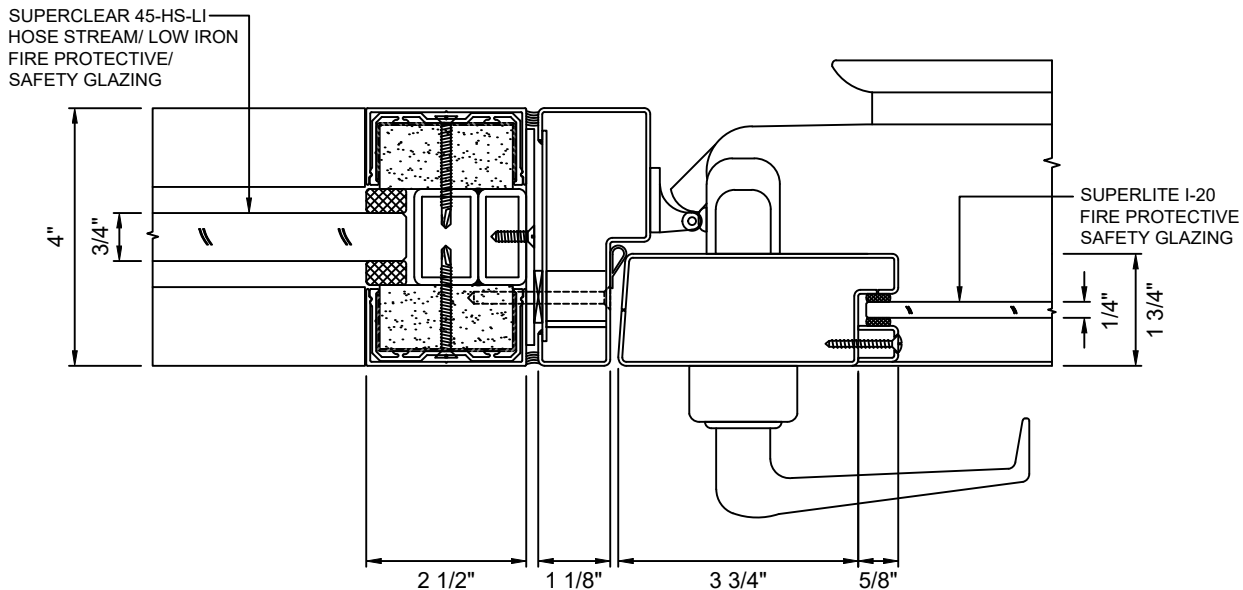


E DOOR JAMB AT LOCK - NARROW STYLE
WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20


GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

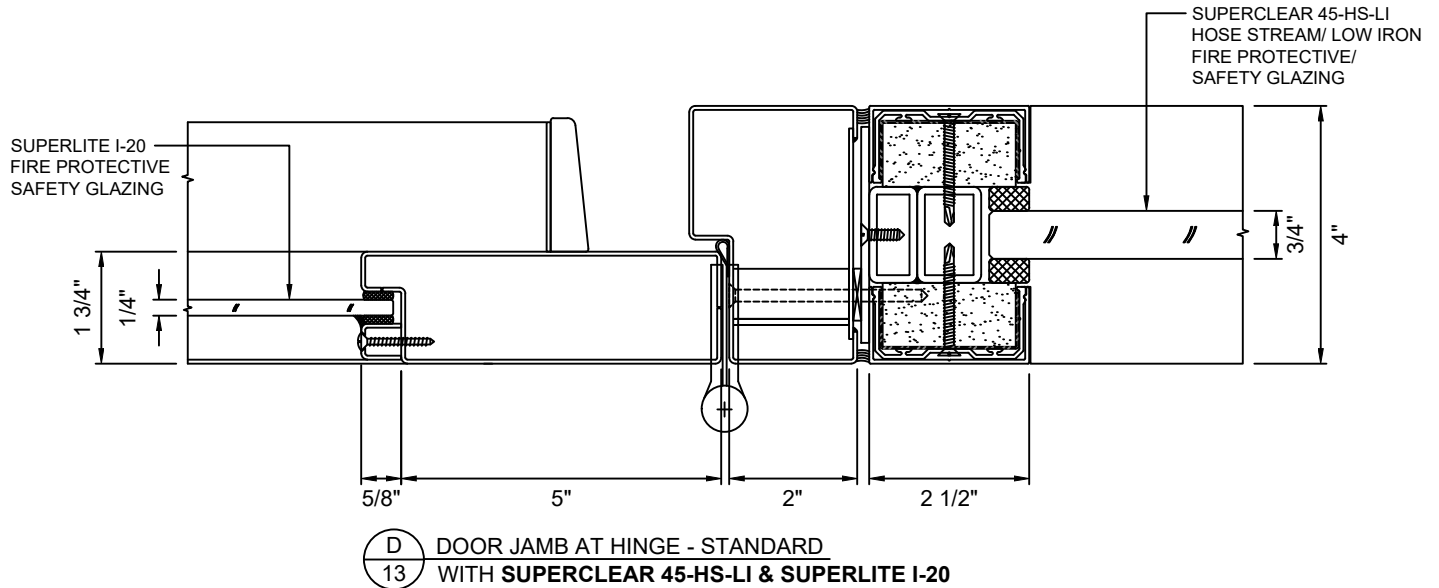


GPX BUILDERS SERIES DOOR NARROW STYLE

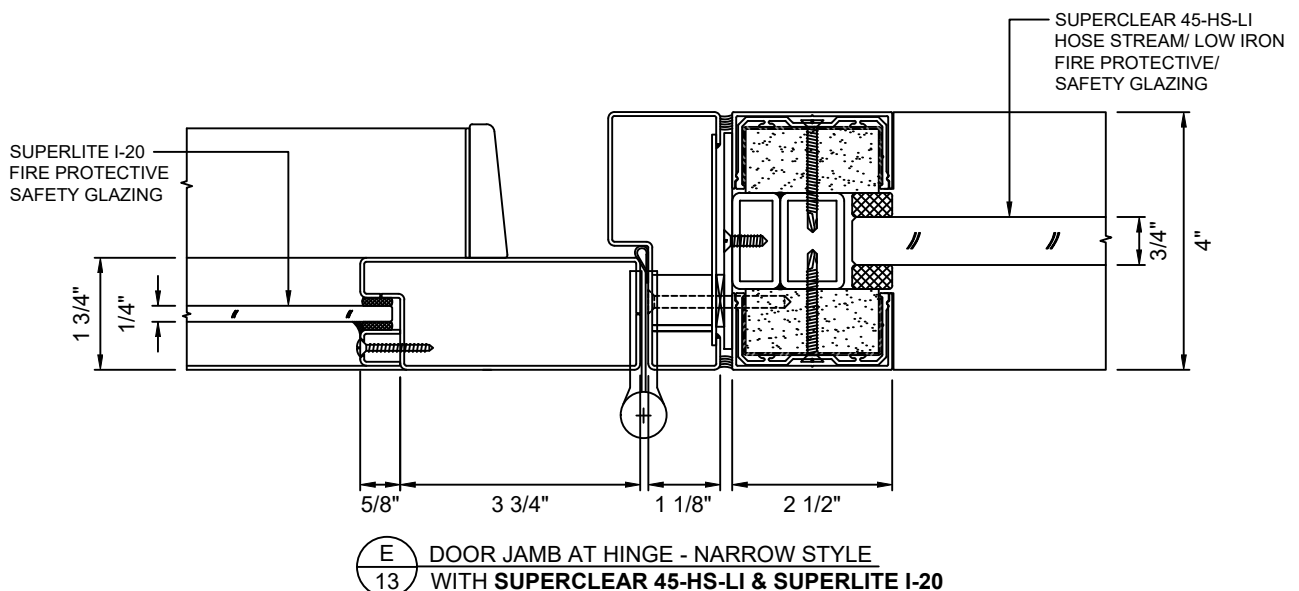


GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

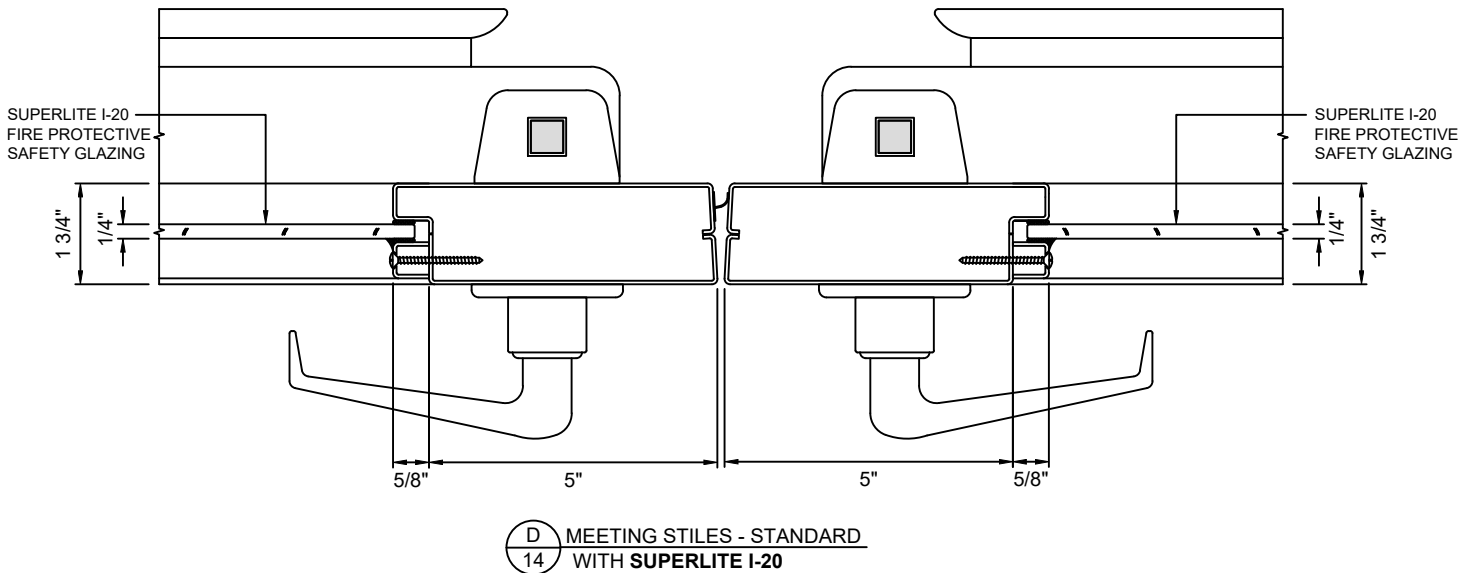


GPX BUILDERS SERIES DOOR NARROW STYLE

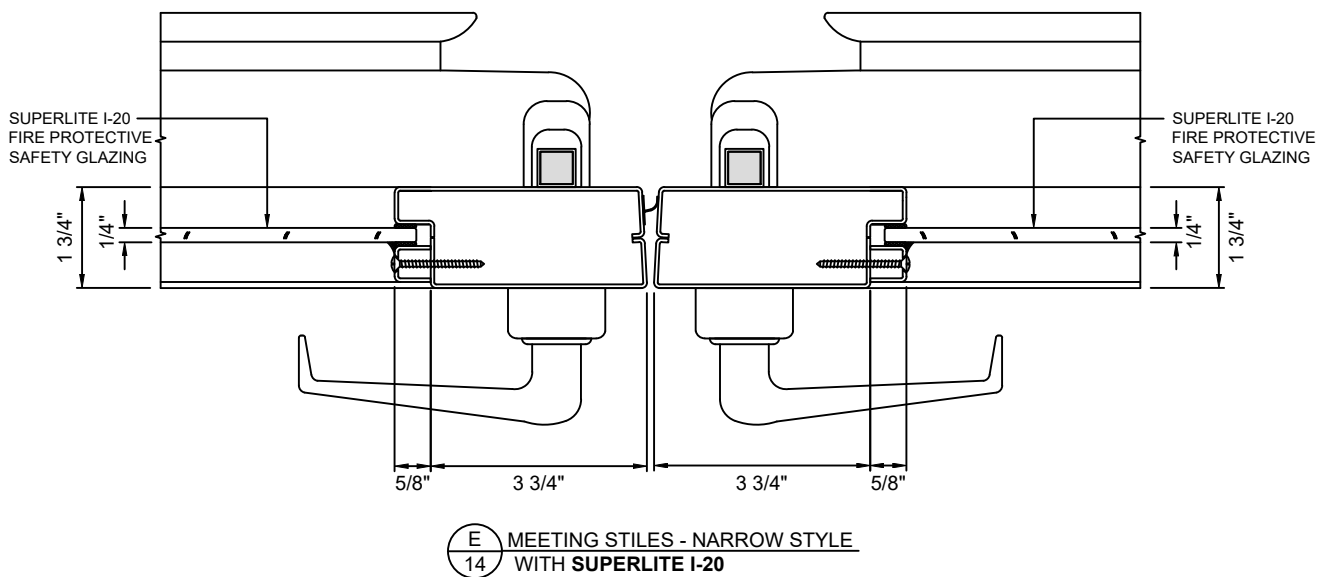

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES FIRE PROTECTIVE DOOR

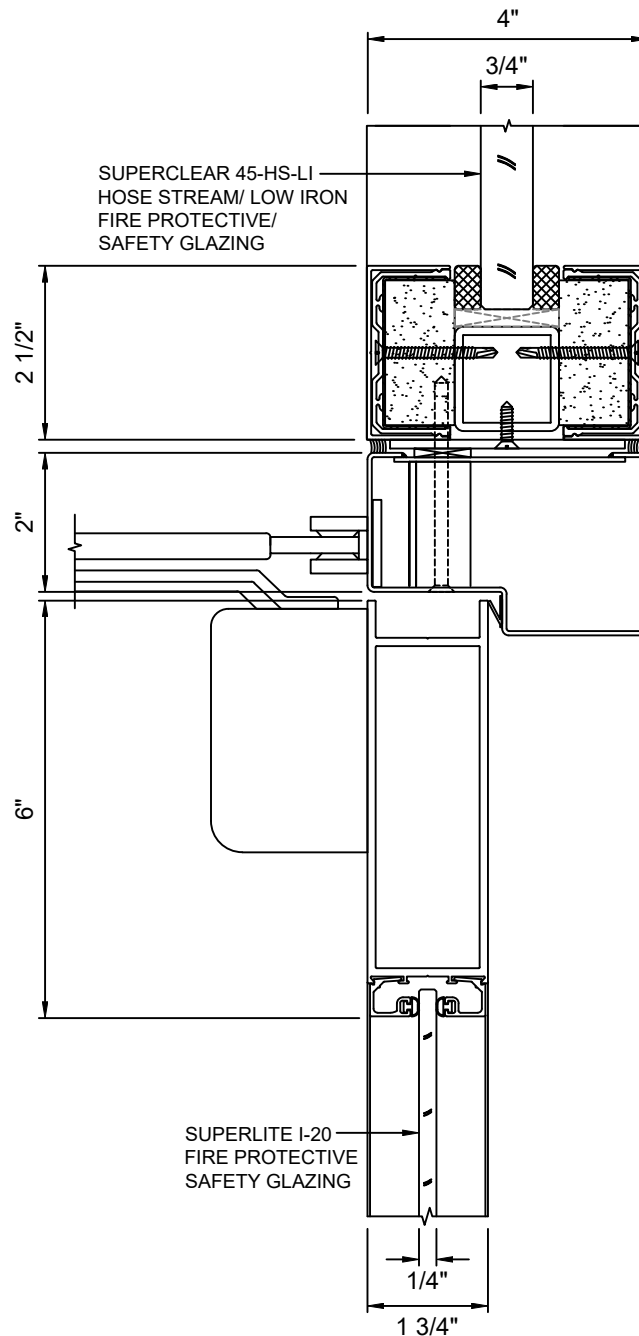


15 DOOR TOP RAIL
WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES FIRE PROTECTIVE DOOR

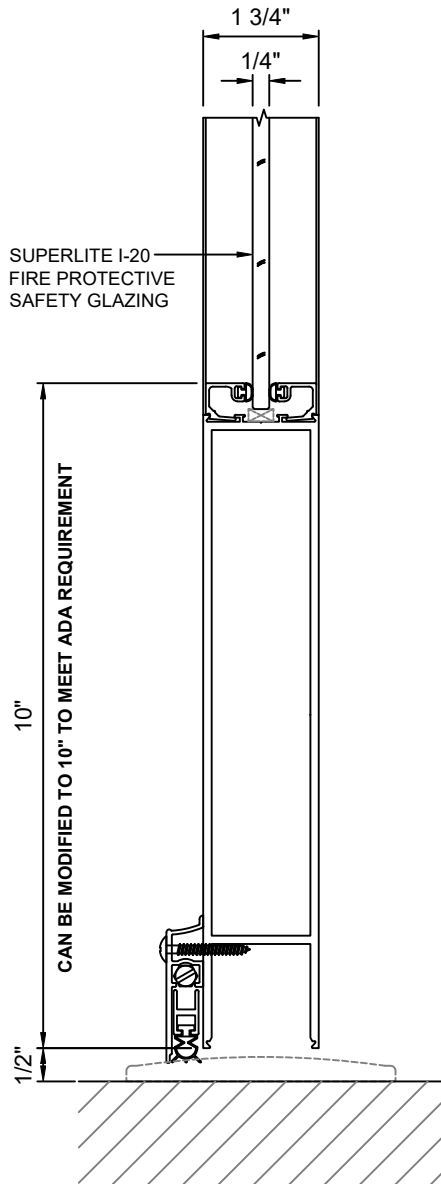


16 DOOR BOTTOM RAIL
WITHOUT DOOR BOTTOM
WITH SUPERLITE I-20

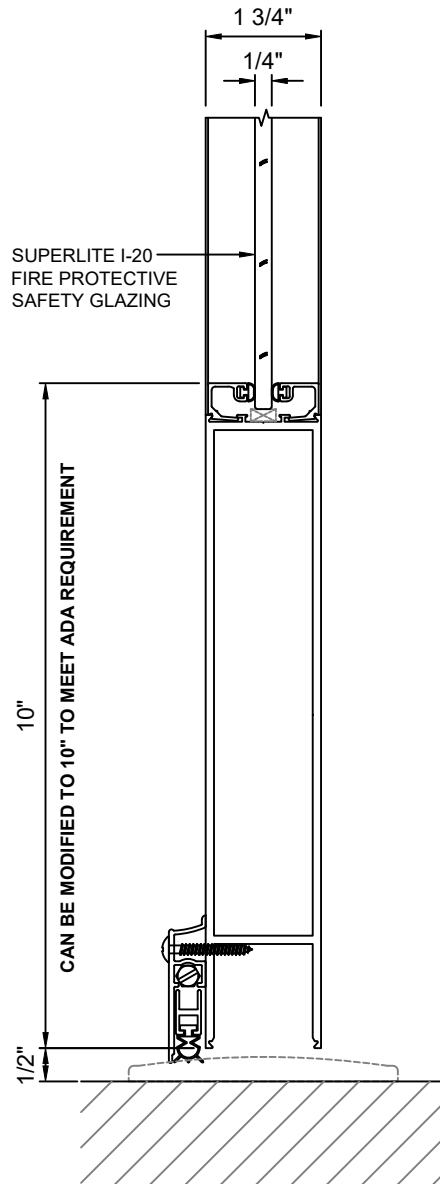

16 DOOR BOTTOM RAIL
WITH DOOR BOTTOM
WITH SUPERLITE I-20

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES FIRE PROTECTIVE DOOR

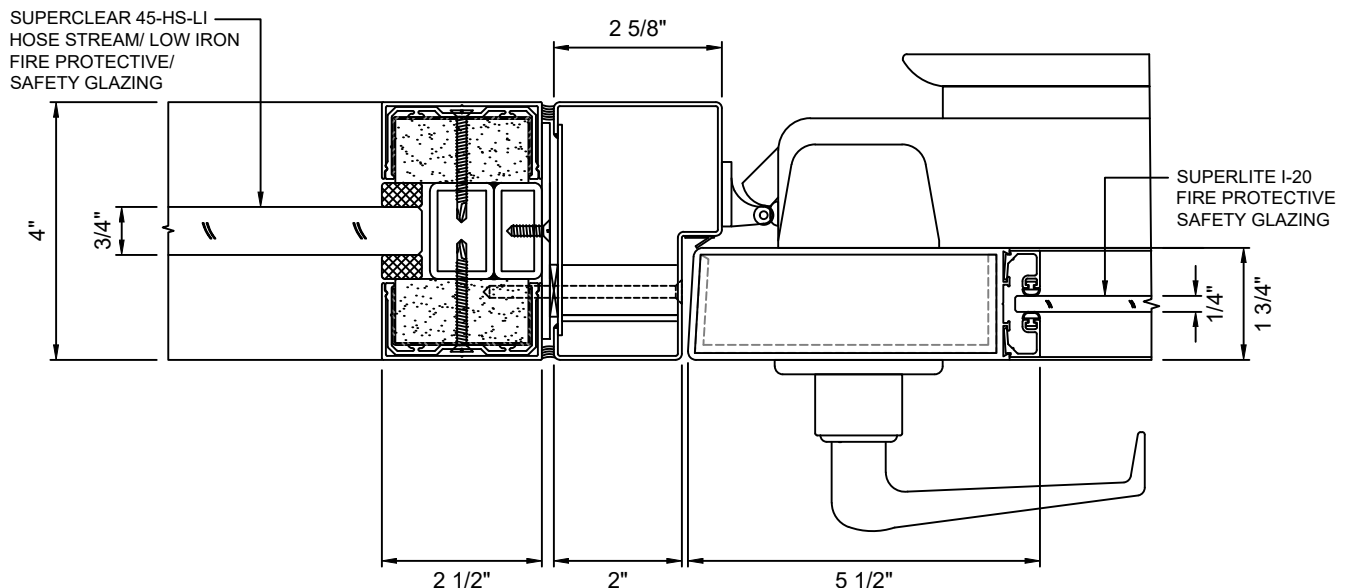

17 DOOR JAMB AT LOCK
WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES FIRE PROTECTIVE DOOR

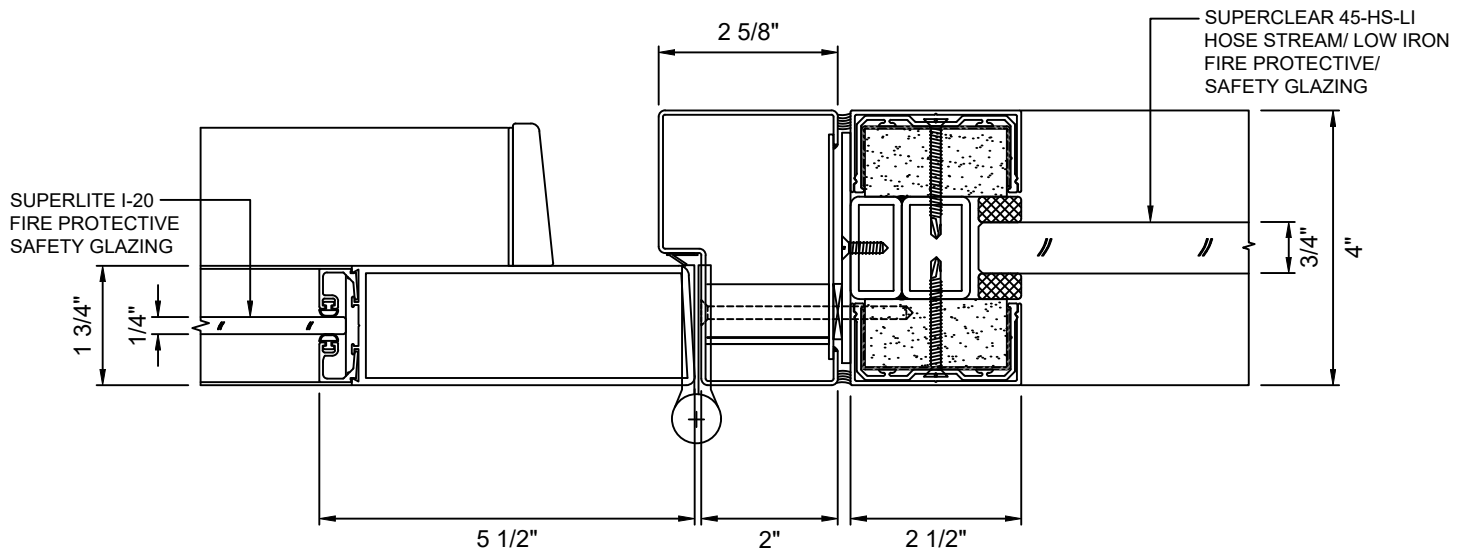

18 DOOR JAMB AT HINGE
WITH SUPERCLEAR 45-HS-LI & SUPERLITE I-20

GPX ARCHITECTURAL SERIES

45 MINUTE *FIRE PROTECTIVE* GPX SIDELITES/TRANSOMS WITH 20 MINUTE GPX ARCHITECTURAL SERIES *FIRE PROTECTIVE* DOOR



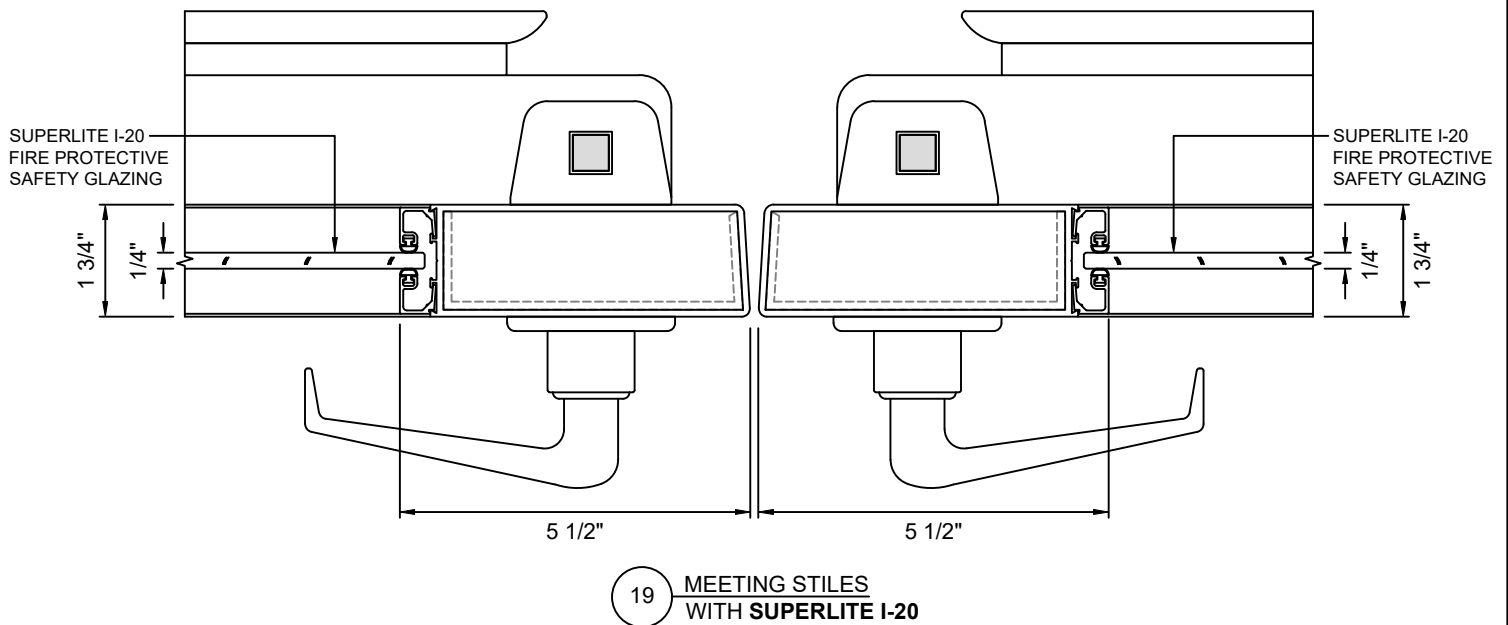


GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 45 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM


GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

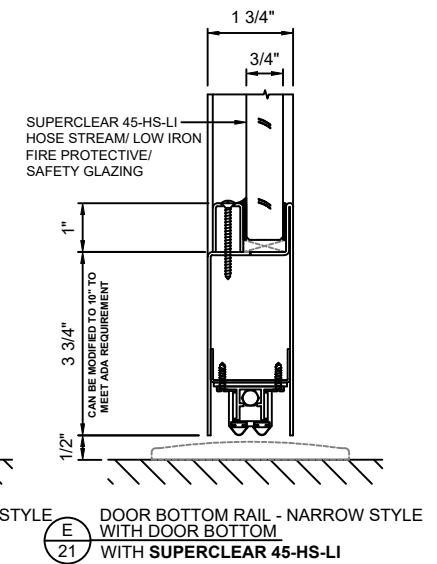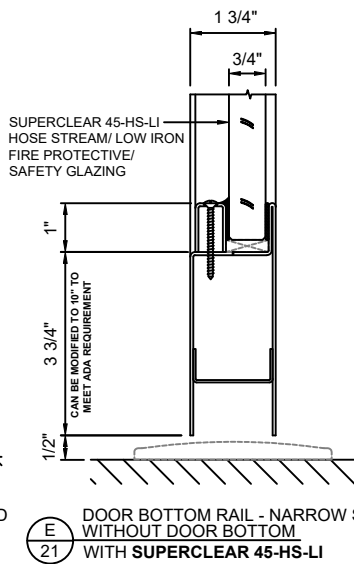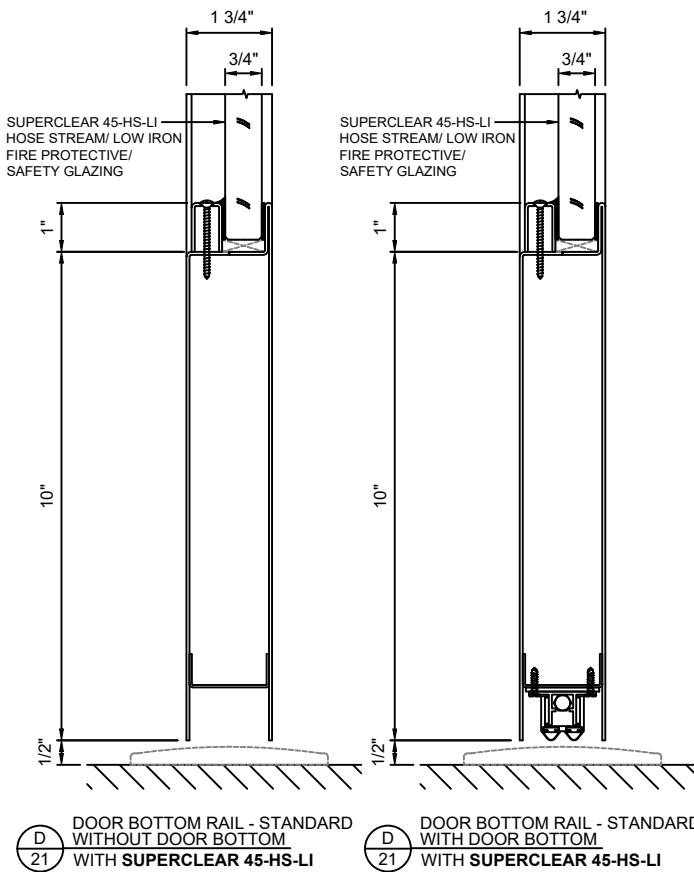

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 45 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

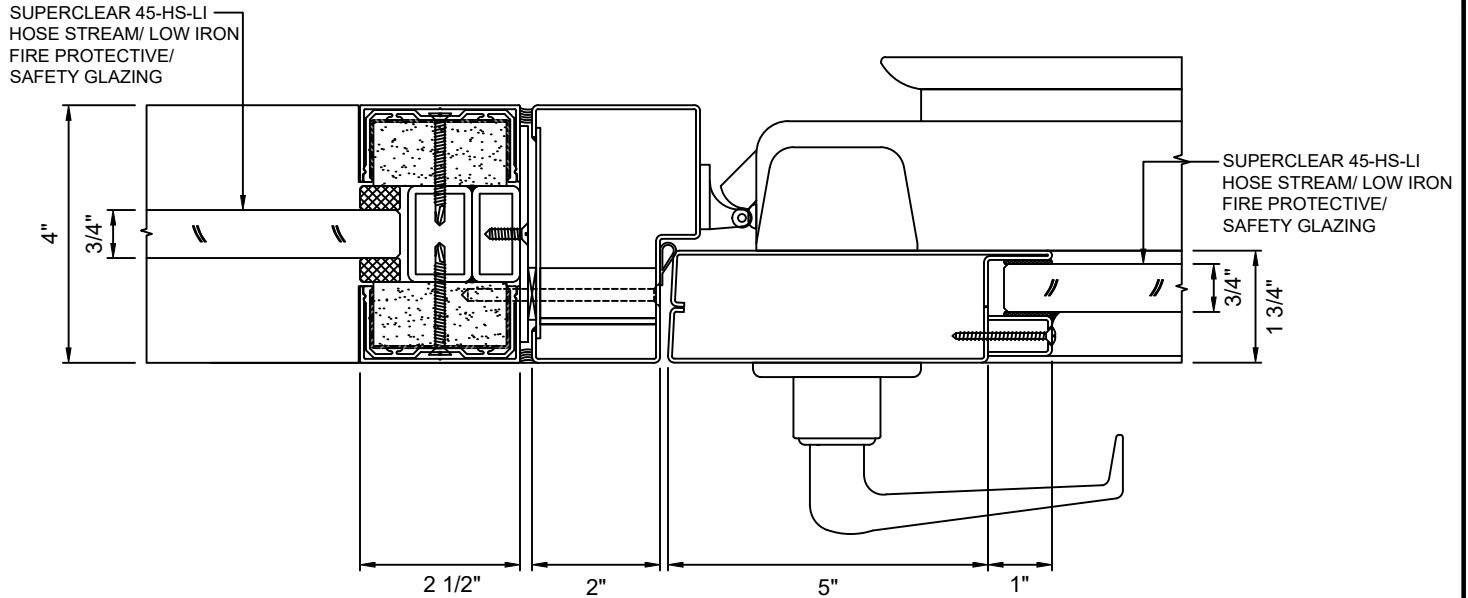

D DOOR JAMB AT LOCK - STANDARD
22 WITH SUPERCLEAR 45-HS-LI

GPX BUILDERS SERIES DOOR NARROW STYLE

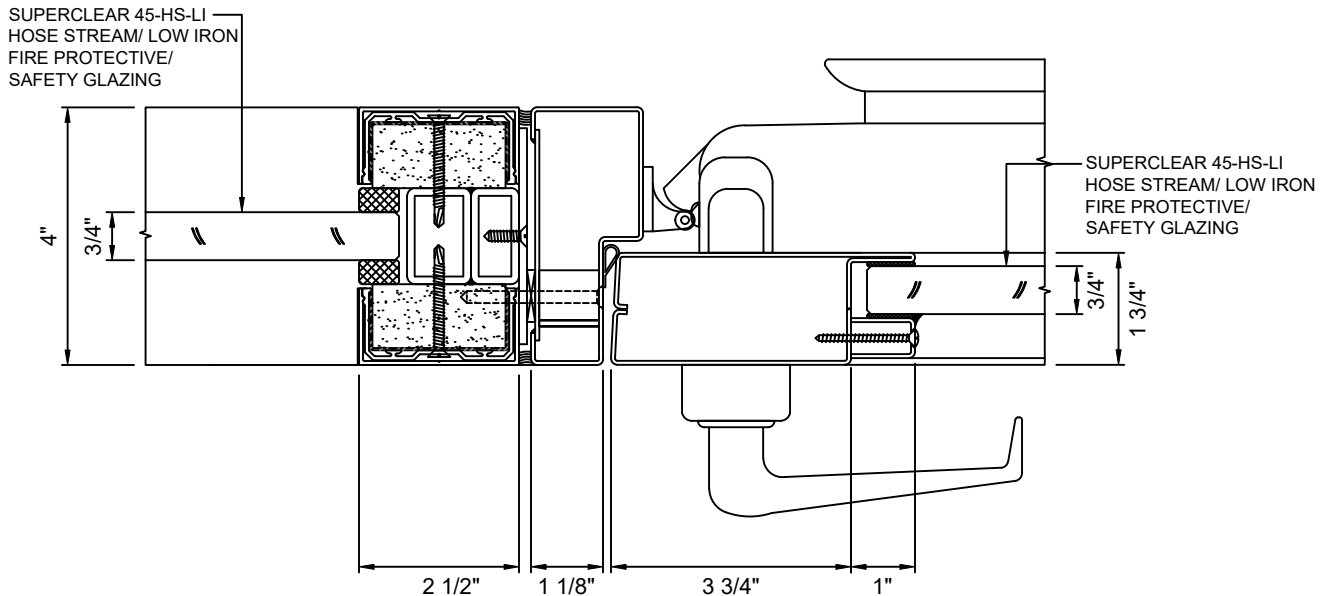


E DOOR JAMB AT LOCK - NARROW STYLE
22 WITH SUPERCLEAR 45-HS-LI


GPX ARCHITECTURAL SERIES

45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 45 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

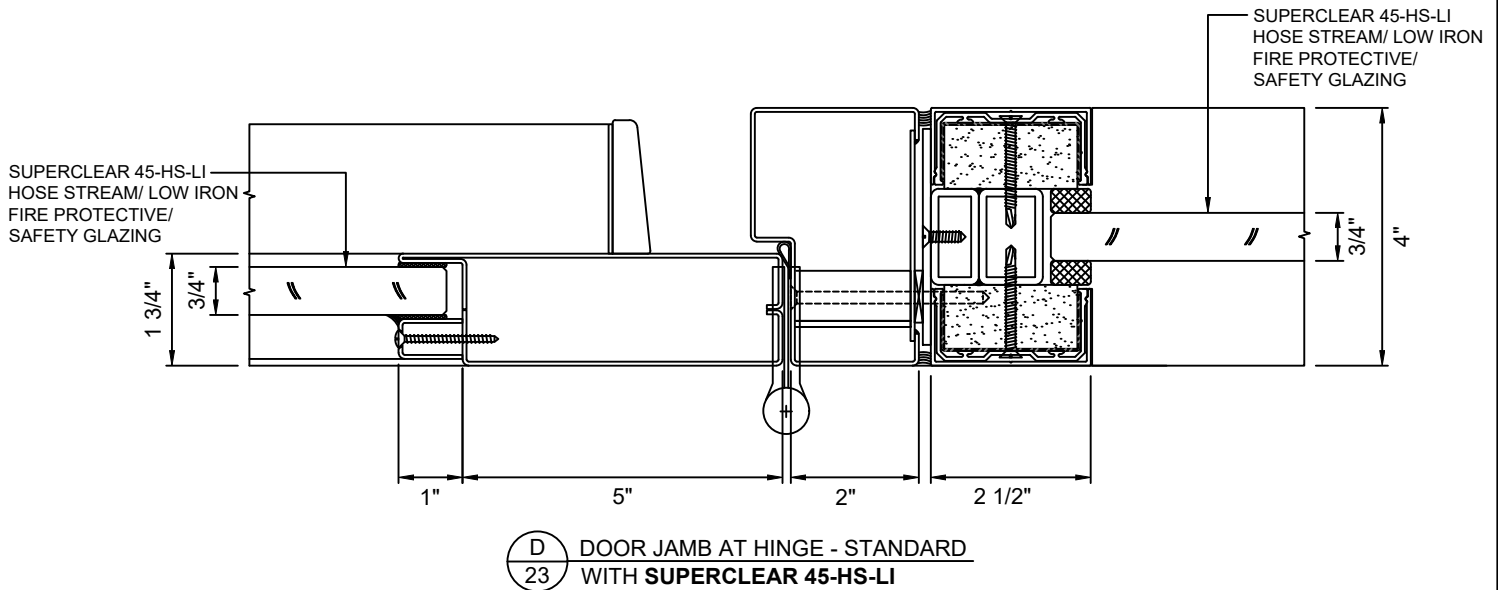


GPX BUILDERS SERIES DOOR NARROW STYLE

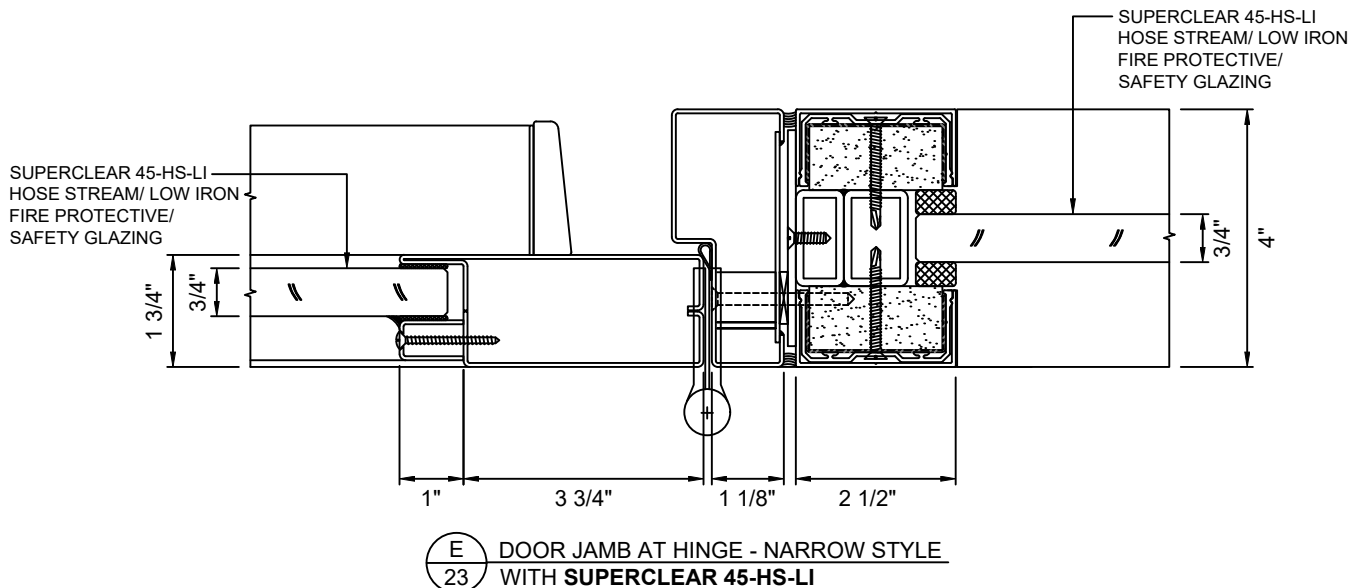

GPX ARCHITECTURAL SERIES


45 MINUTE FIRE PROTECTIVE GPX SIDELITES/TRANSOMS WITH 45 MINUTE GPX BUILDERS SERIES FIRE PROTECTIVE DOOR

GPX BUILDERS SERIES DOOR STANDARD

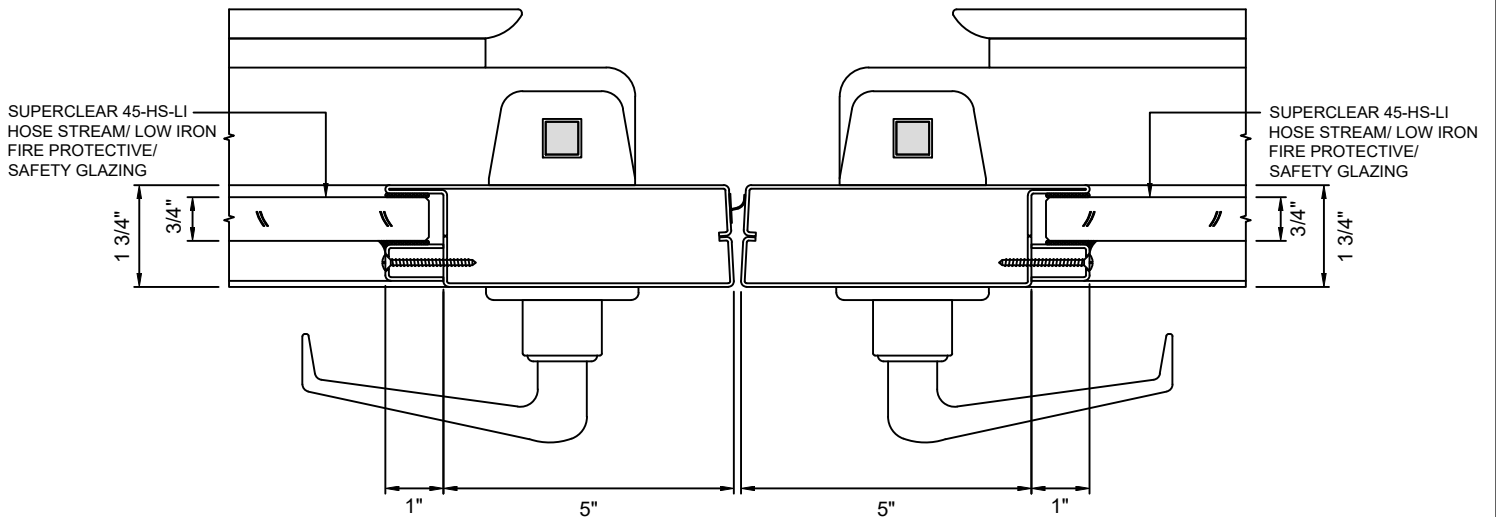

D MEETING STILES - STANDARD
24 WITH SUPERCLEAR 45-HS-LI

GPX BUILDERS SERIES DOOR NARROW STYLE

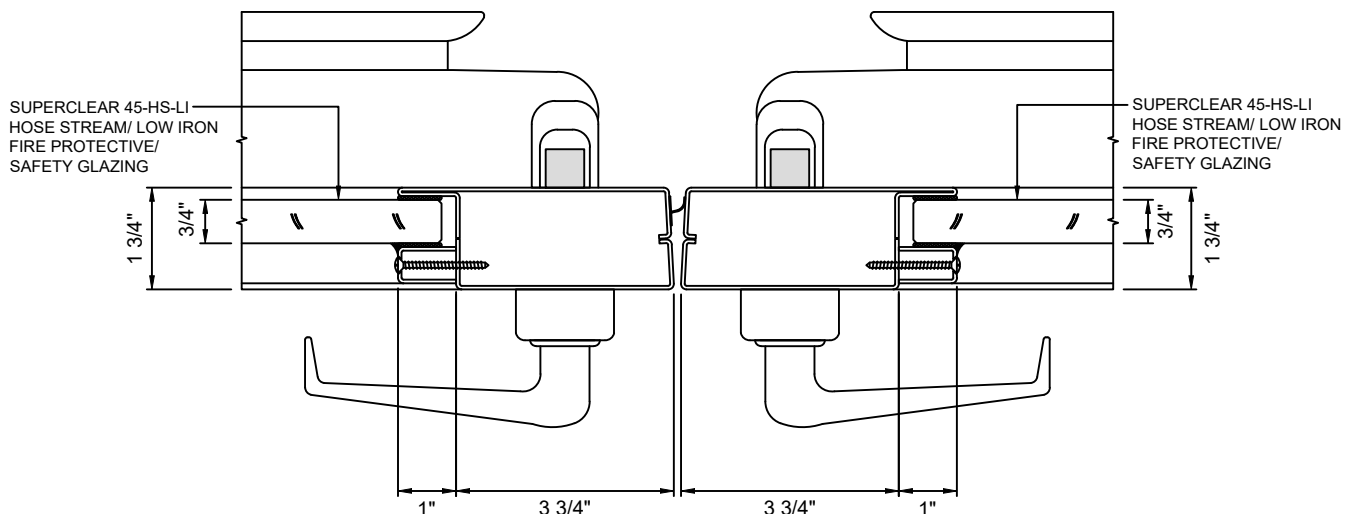

E MEETING STILES - NARROW STYLE
24 WITH SUPERCLEAR 45-HS-LI