


GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

GPX CURTAIN WALL SYSTEM WITH SUPERLITE II-XL 60 IGU
OR SUPERLITE II-XLB 60 IGU

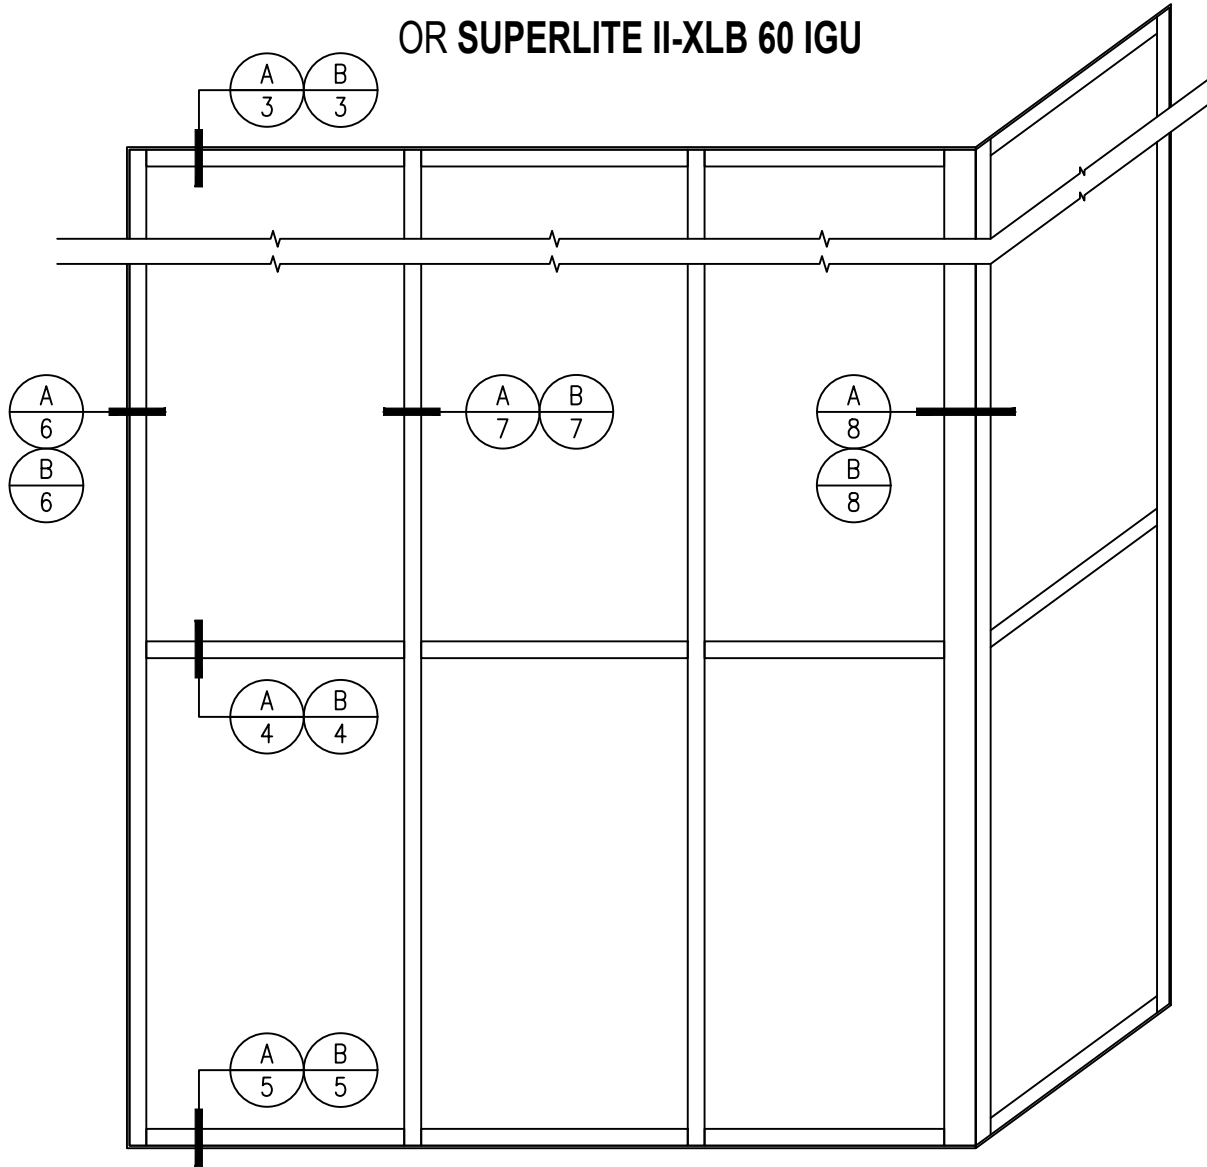


GLASS TYPE

- (A) SUPERLITE II-XL 60 IGU
MAX. CV AREA PER INDIVIDUAL LITE: **4,952 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **124 IN.**
- (B) SUPERLITE II-XLB 60 IGU
MAX. CV AREA PER INDIVIDUAL LITE: **10,000 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **125 IN.**

GPX CURTAINWALL SYSTEM


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES TEMPERATURE RISE SINGLE DOOR WITH SUPERLITE II-XL 60 IGU

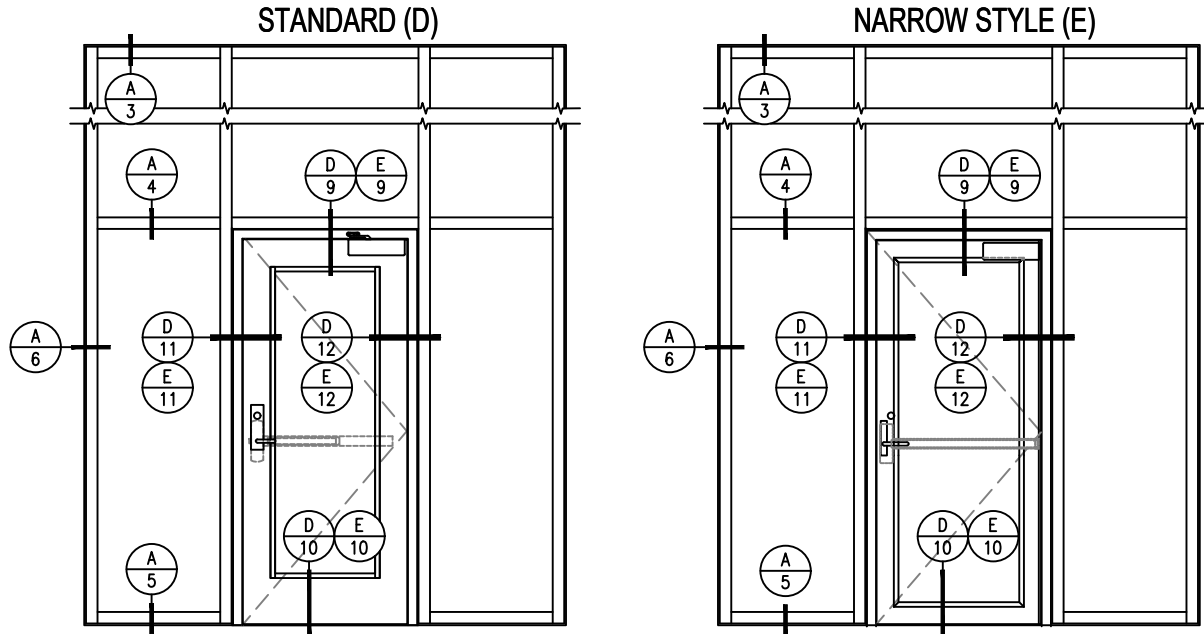

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: **54 IN. X 120 IN.**


GPX BUILDERS SERIES TEMPERATURE RISE PAIR DOOR WITH SUPERLITE II-XL 60 IGU

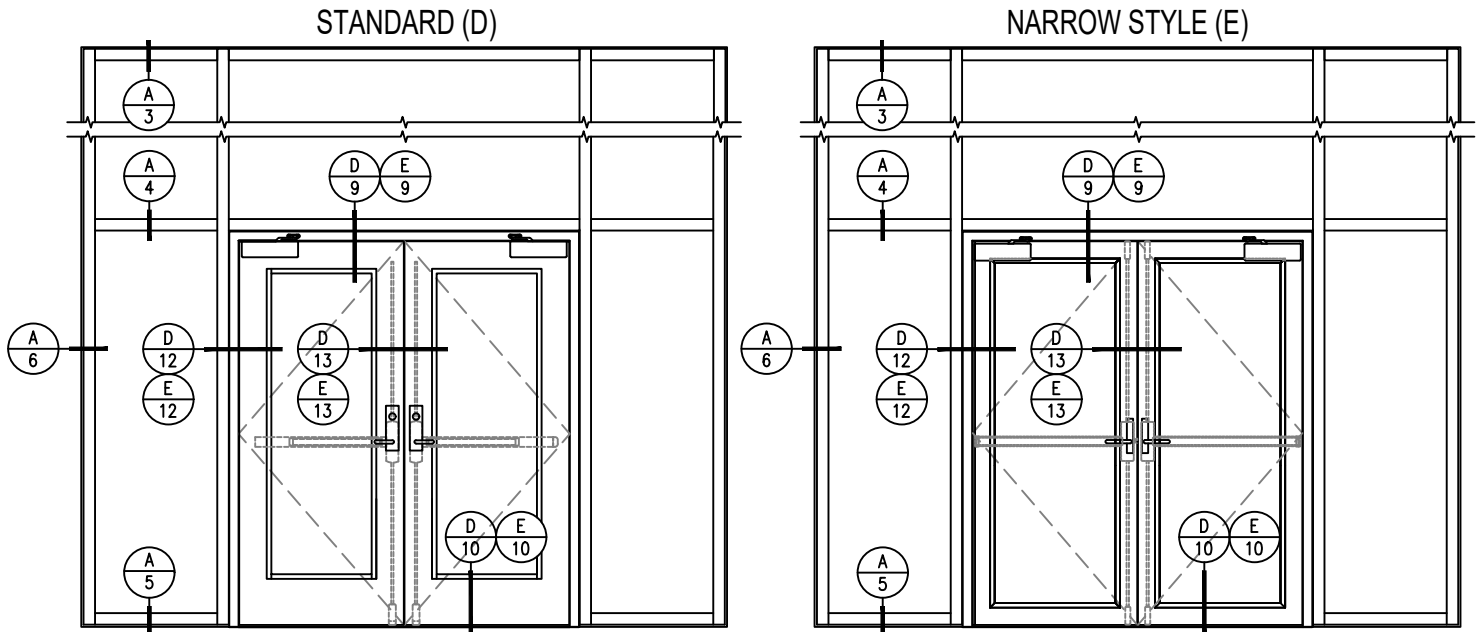


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: **96 IN. X 120 IN.**

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

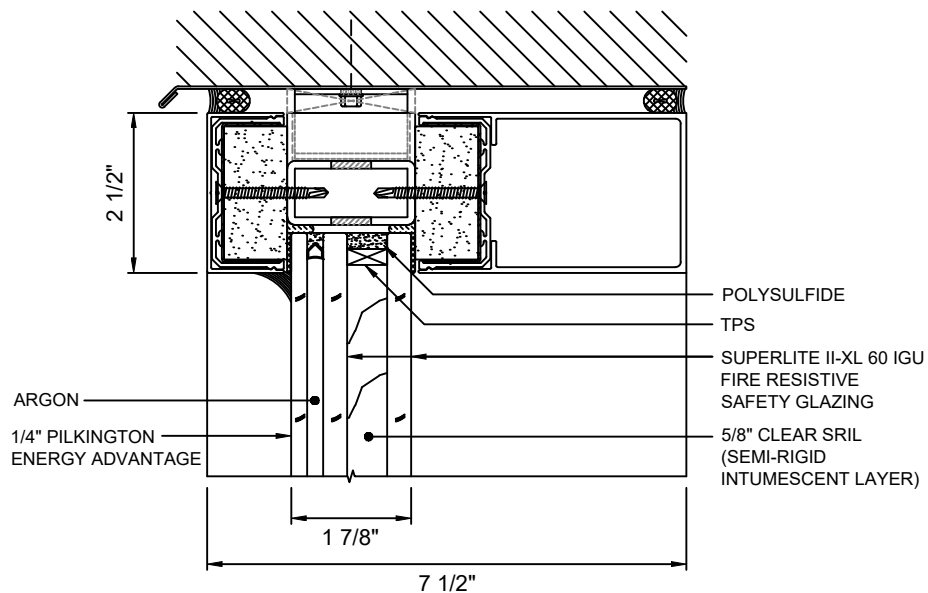


A
3
 HEAD DETAIL
WITH **SUPERLITE II-XL 60 IGU**

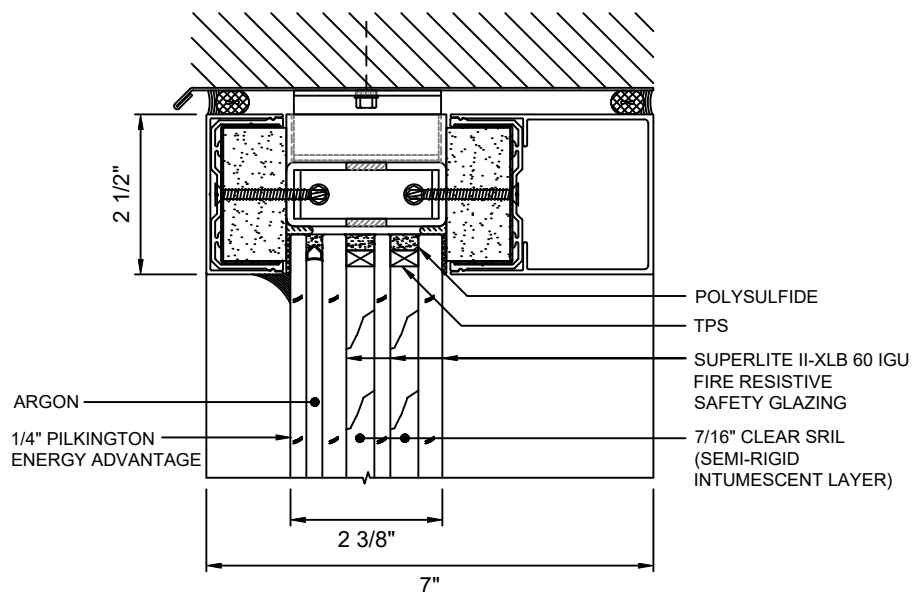


B
3
 HEAD DETAIL
WITH **SUPERLITE II-XLB 60 IGU**

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

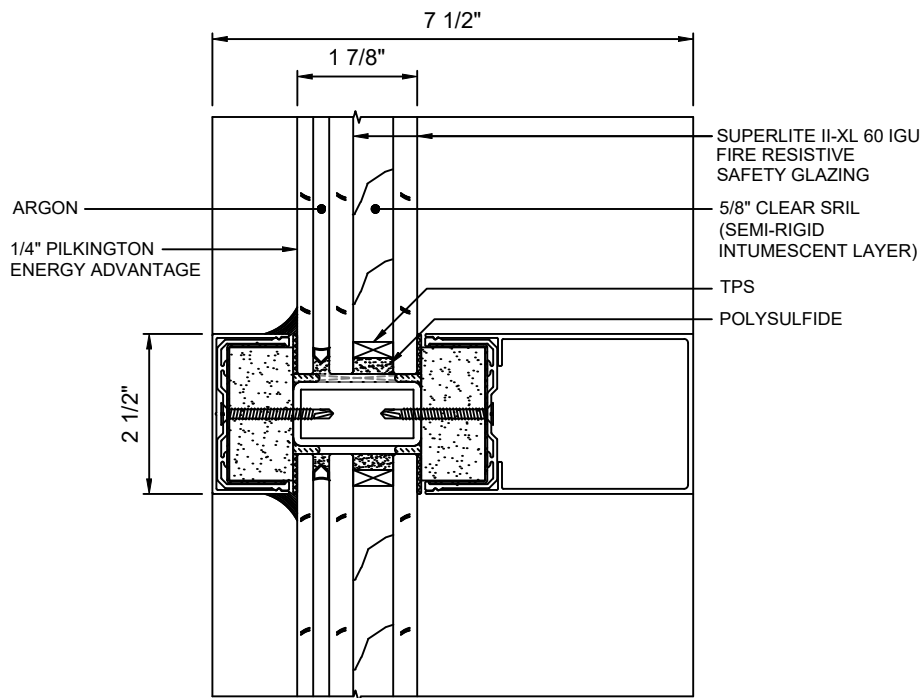


A
4 HORIZONTAL MULLION
WITH SUPERLITE II-XL 60 IGU

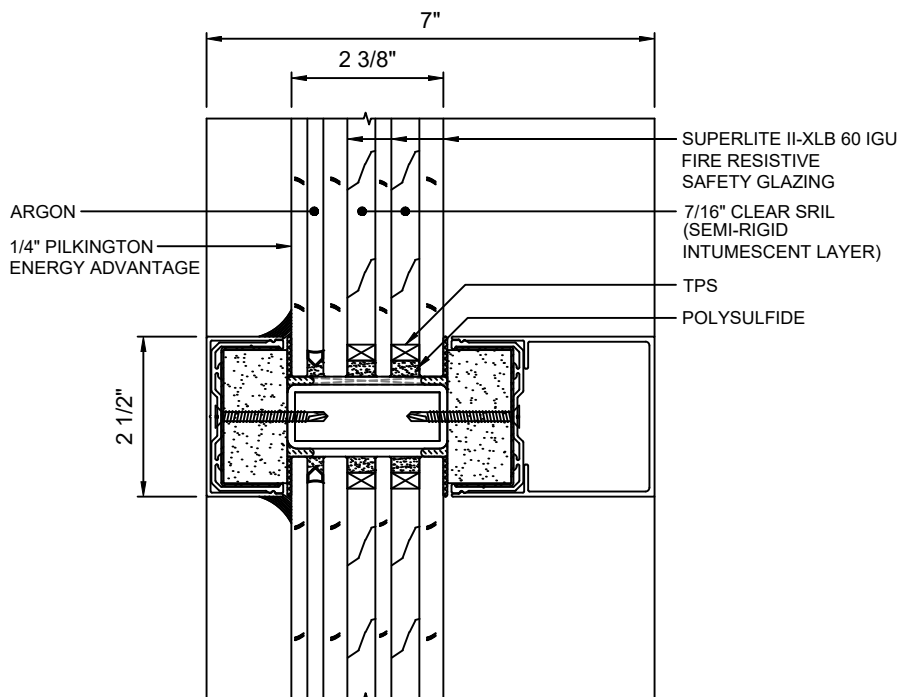


B
4 HORIZONTAL MULLION
WITH SUPERLITE II-XLB 60 IGU

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

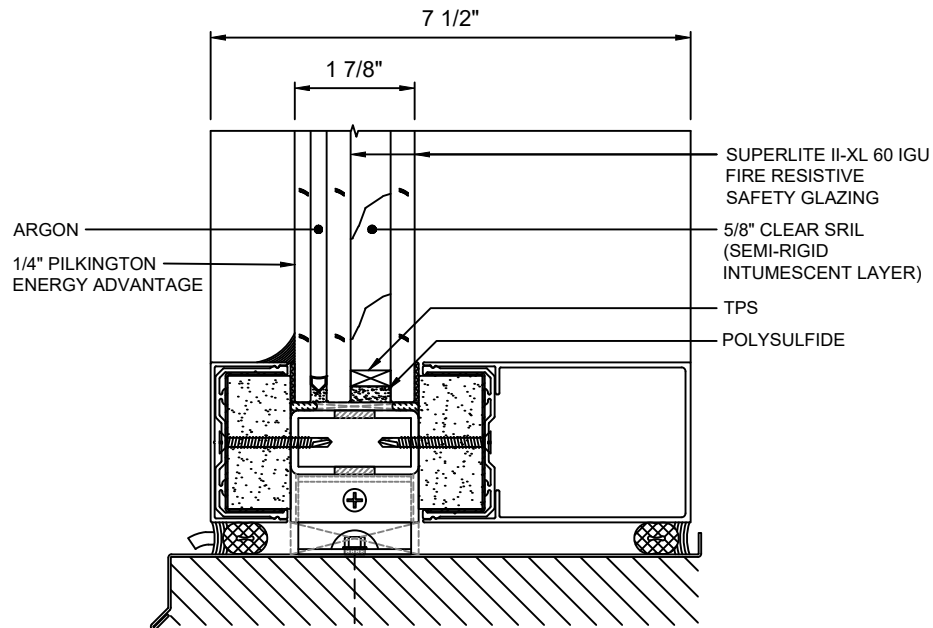


A SILL DETAIL
5 WITH SUPERLITE II-XL 60 IGU

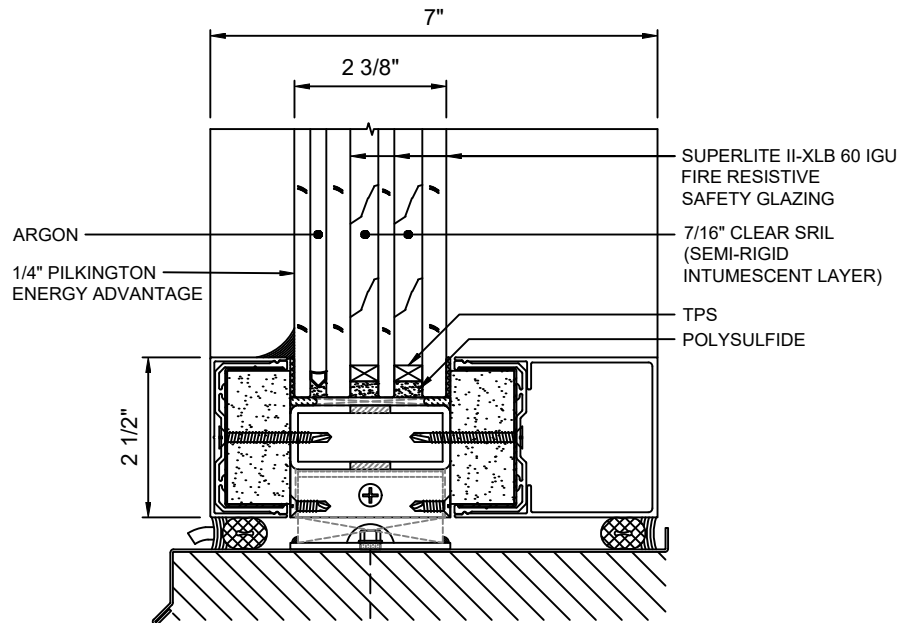


B SILL DETAIL
5 WITH SUPERLITE II-XLB 60 IGU

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

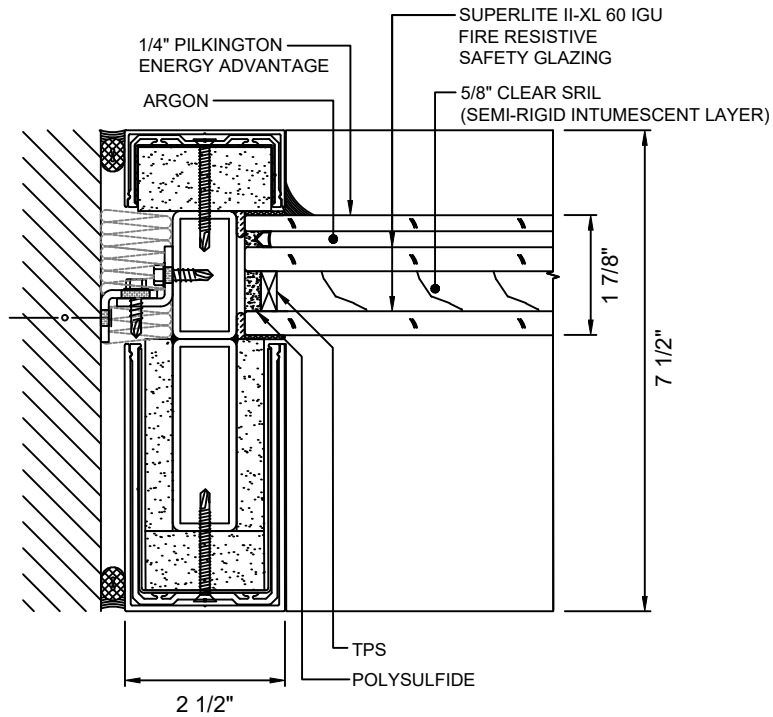


A JAMB DETAIL
6 WITH SUPERLITE II-XL 60 IGU

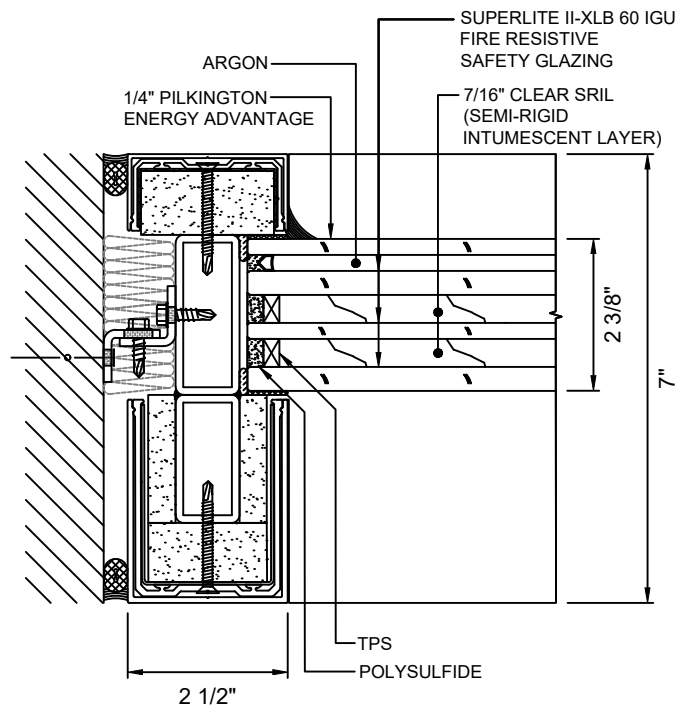


B JAMB DETAIL
6 WITH SUPERLITE II-XLB 60 IGU

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

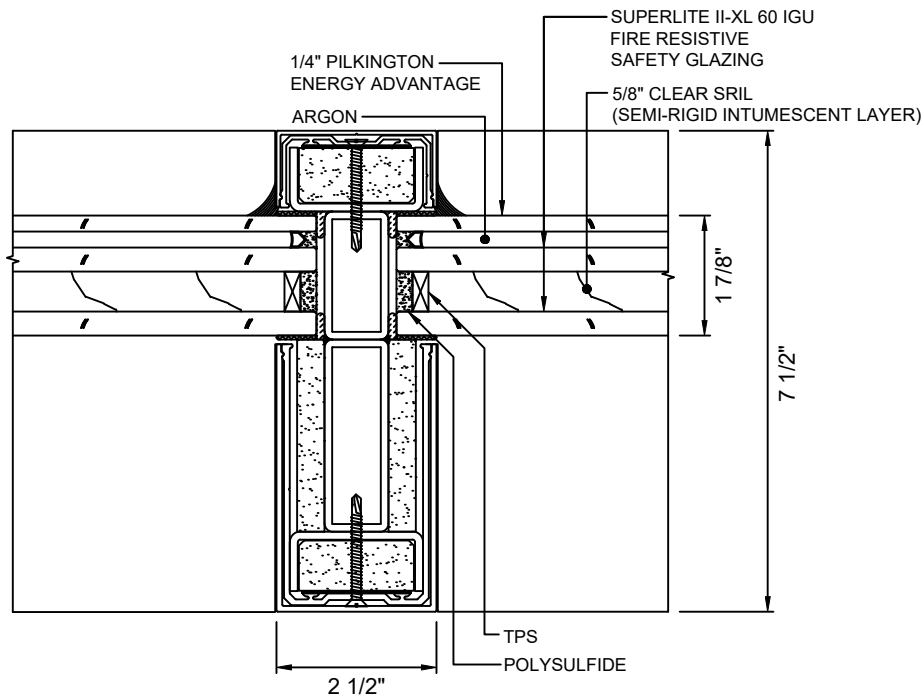



A
7 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XL 60 IGU**

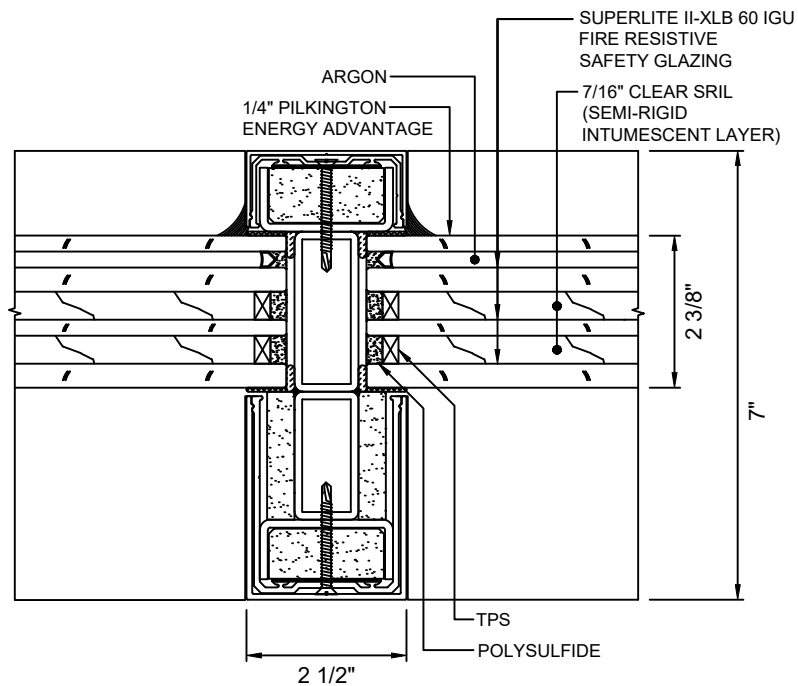

B
7 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XLB 60 IGU**

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE CURTAIN WALL

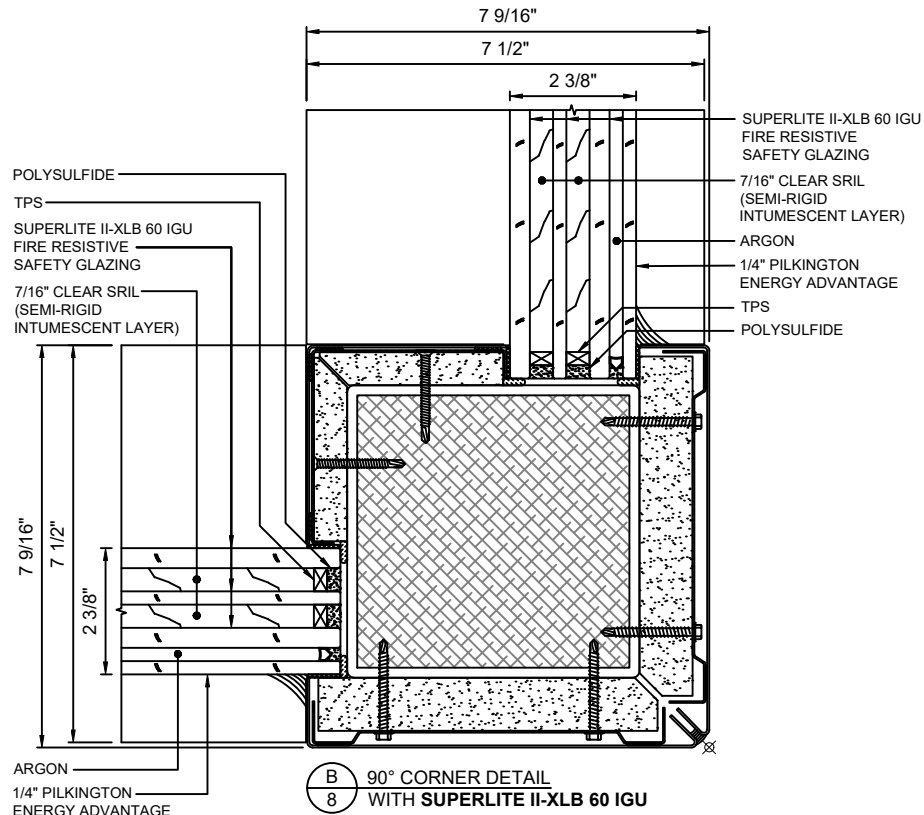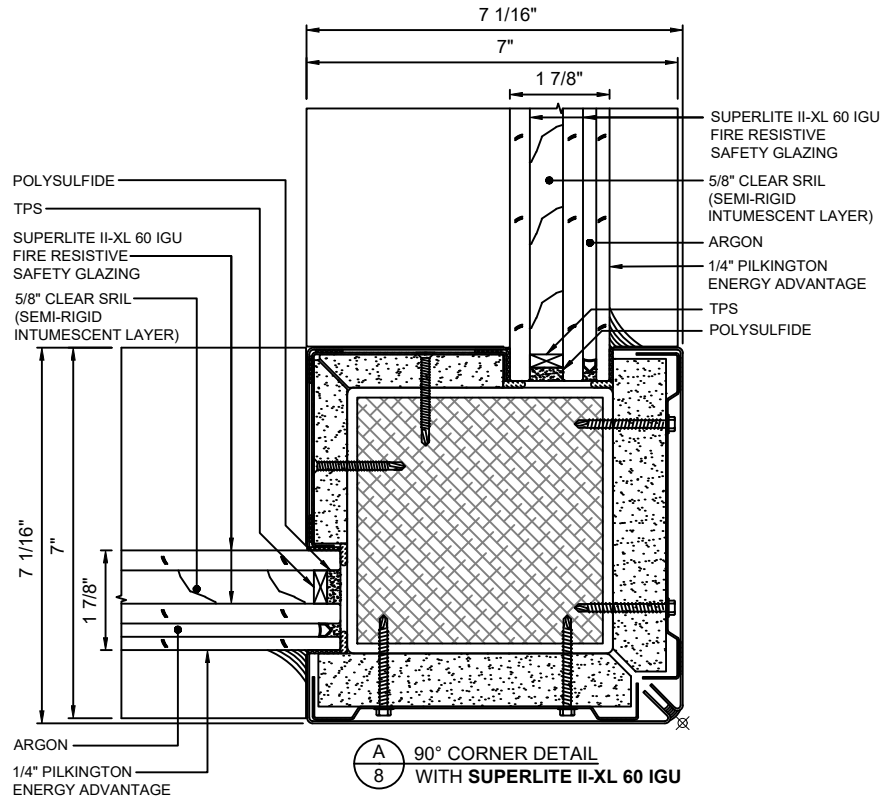


GPX CURTAINWALL SYSTEM


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

GPX BUILDERS SERIES DOOR NARROW STYLE

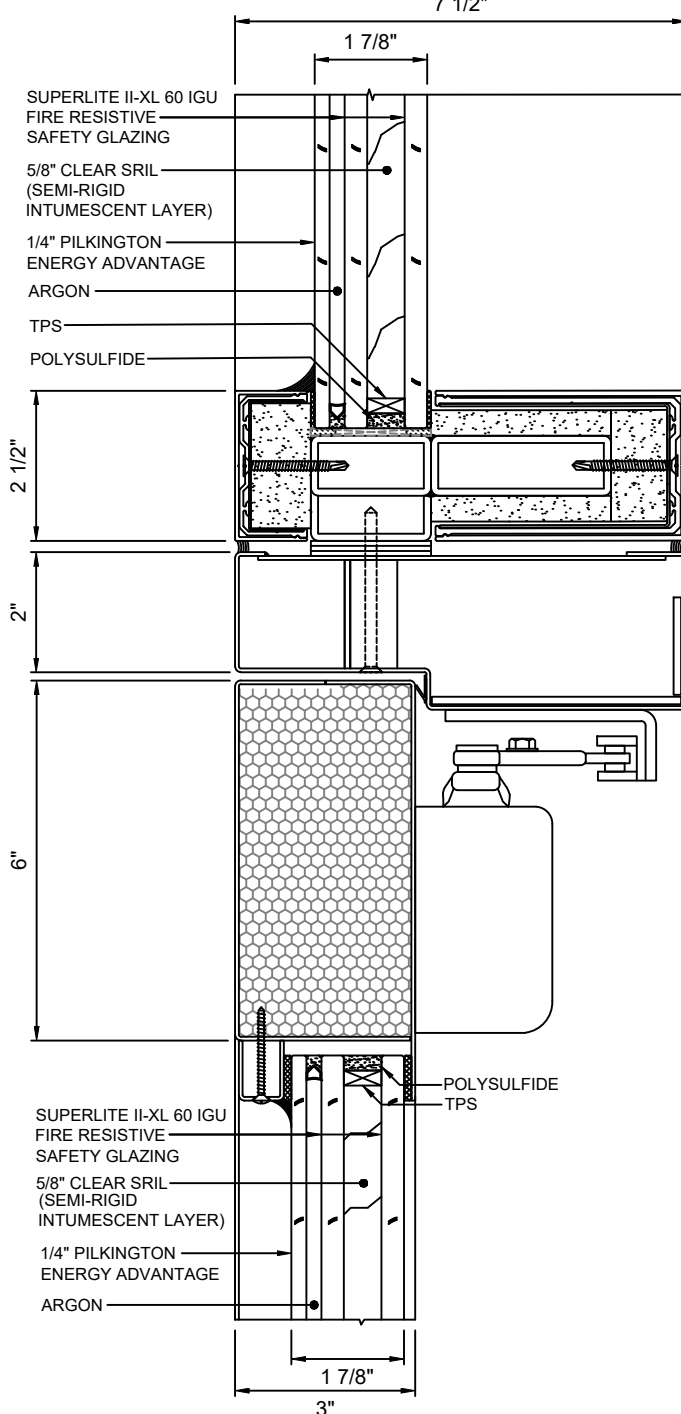

D DOOR TOP RAIL - STANDARD
9 WITH SUPERLITE II-XL 60 IGU

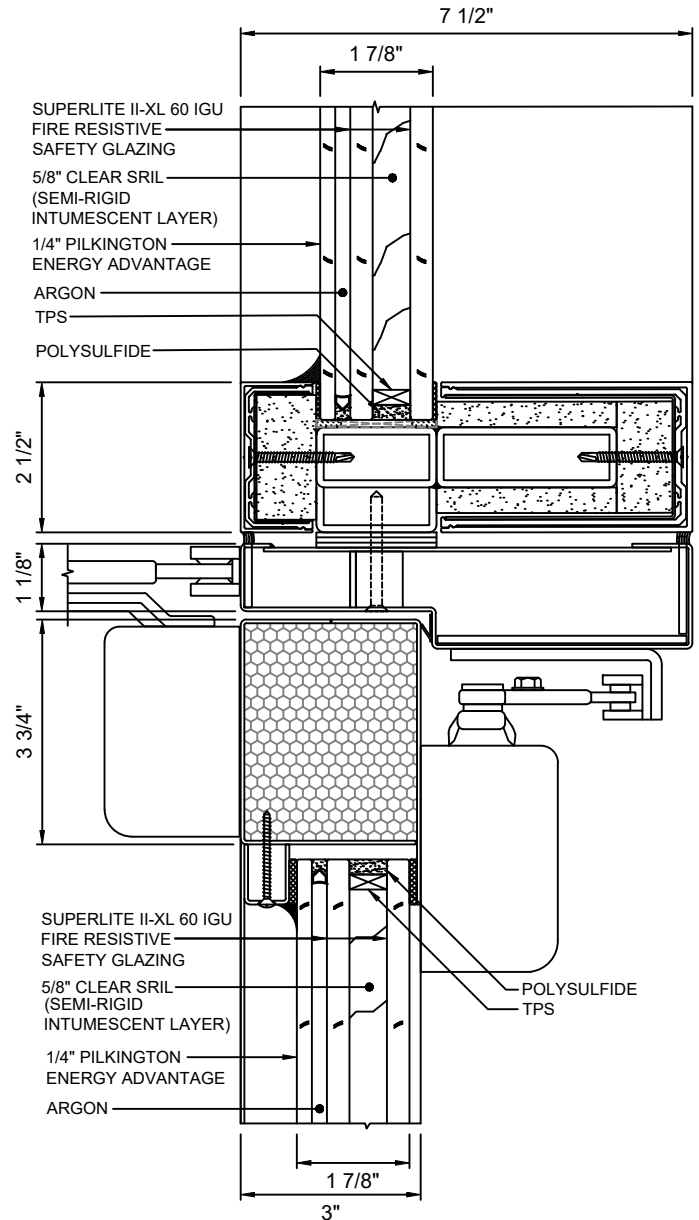


E DOOR TOP RAIL - NARROW STYLE
9 WITH SUPERLITE II-XL 60 IGU

GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM


GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

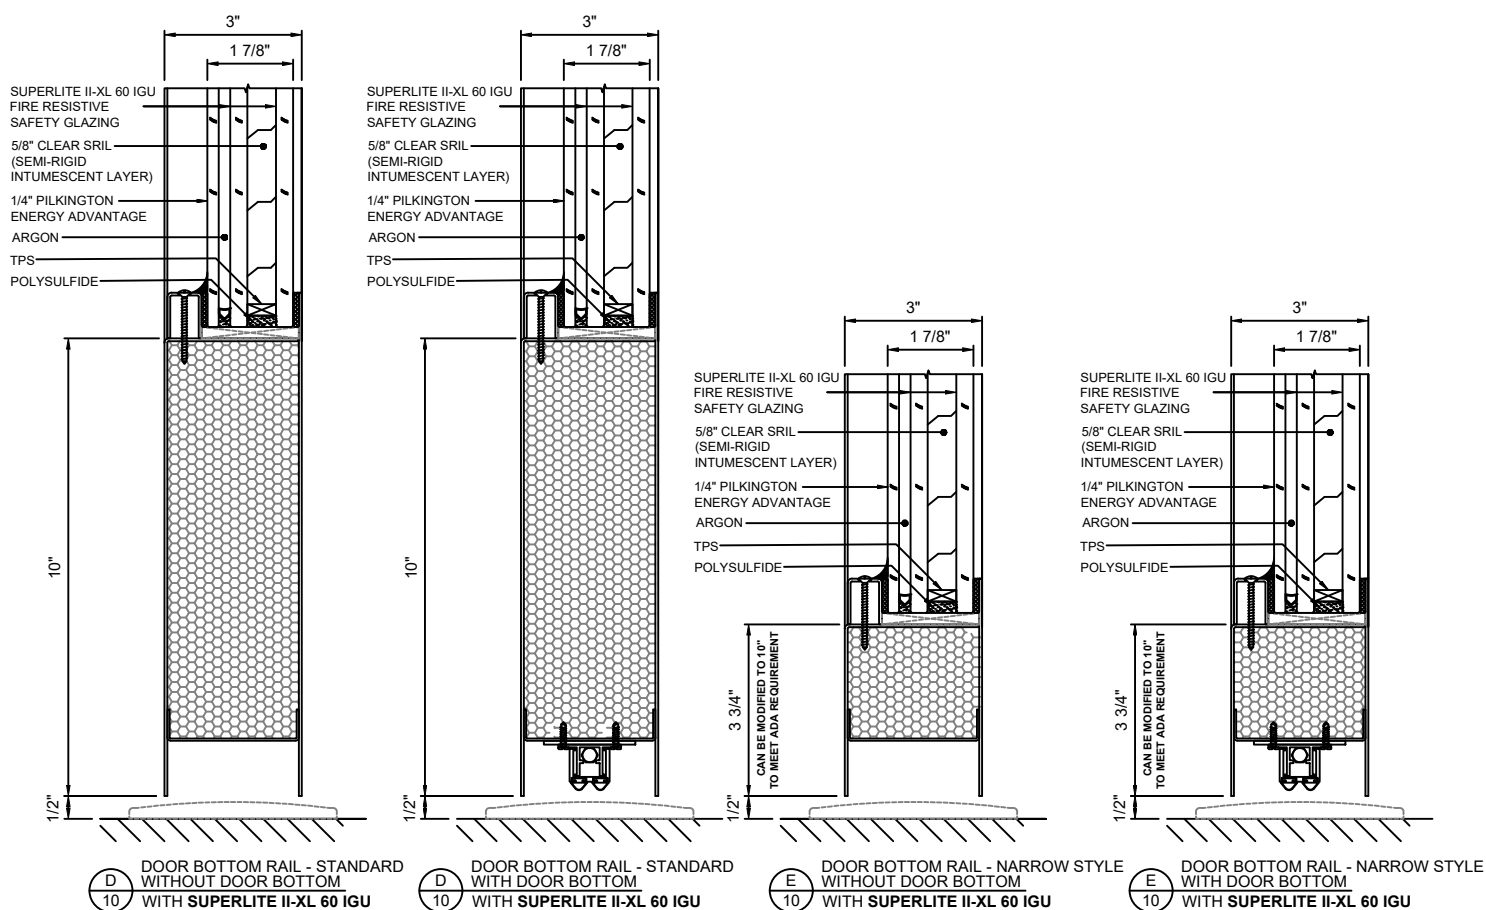


GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

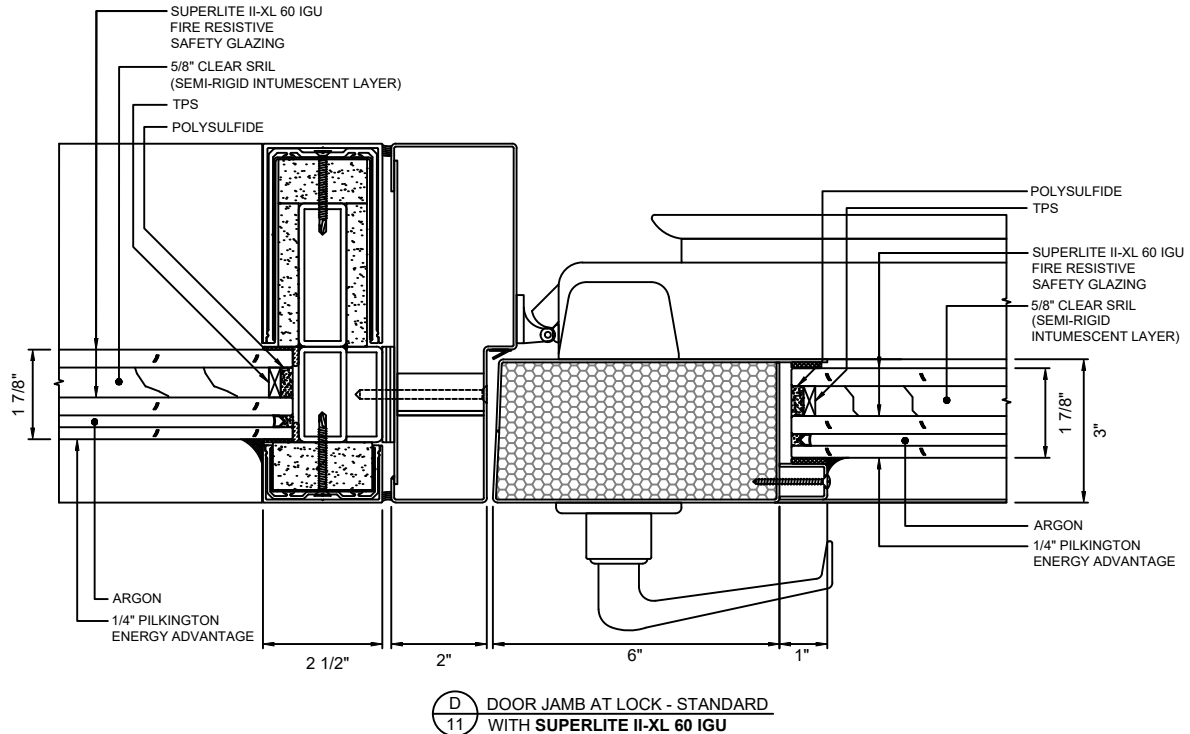


GPX BUILDERS SERIES DOOR NARROW STYLE

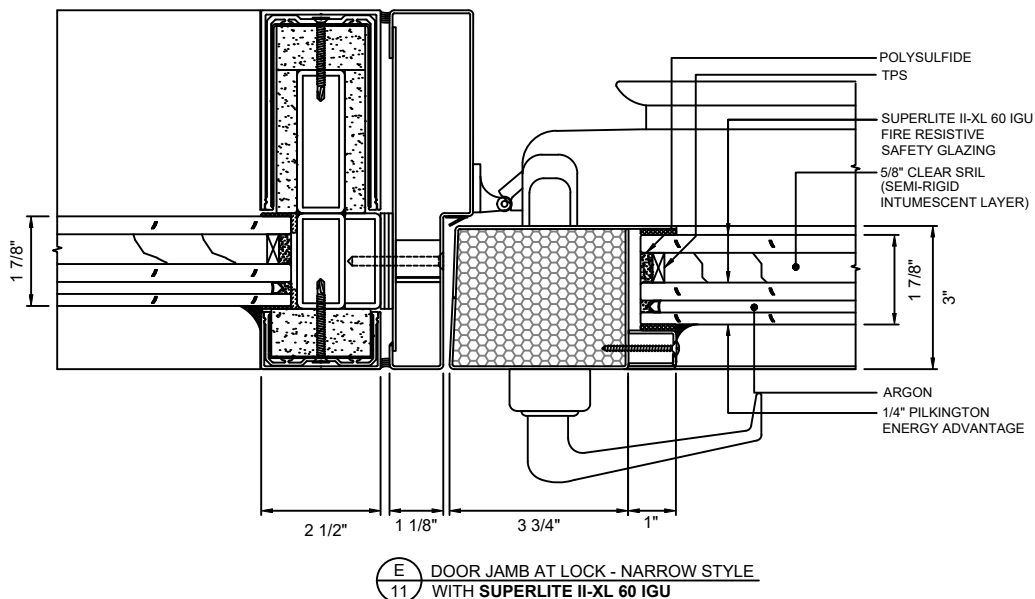


GPX CURTAINWALL SYSTEM

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

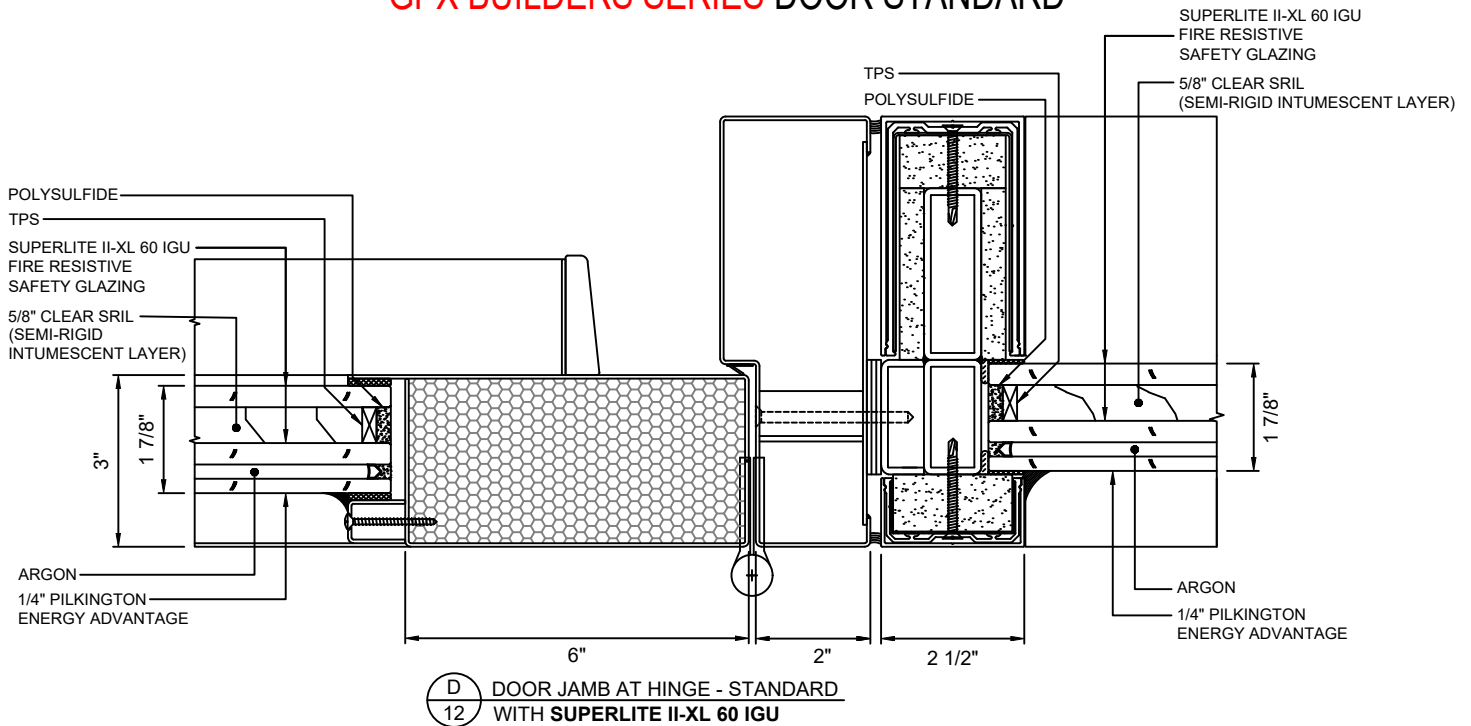

GPX BUILDERS SERIES DOOR NARROW STYLE

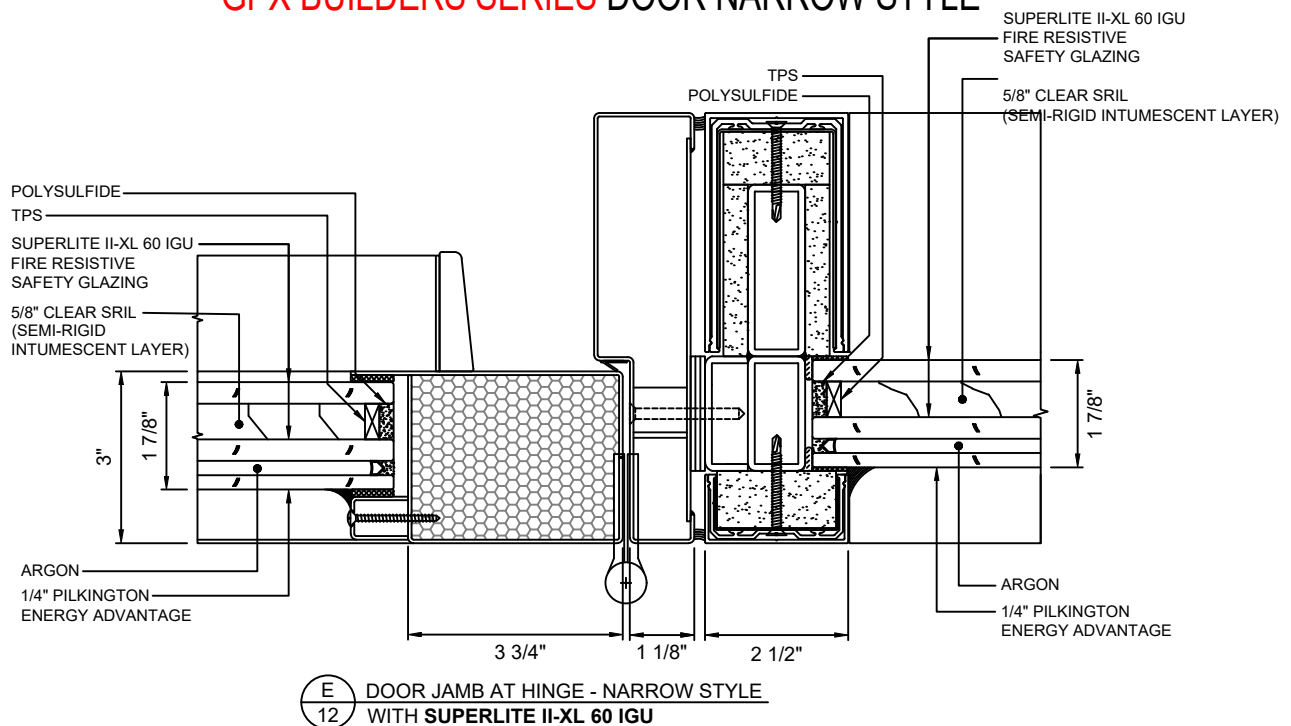

GPX BUILDERS SERIES DOOR STANDARD

