



GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL

GPX ARCHITECTURAL SERIES FIRE RESISTIVE WALL WITH SUPERLITE II-XL 60 IGU
OR SUPERLITE II-XLB 60 IGU

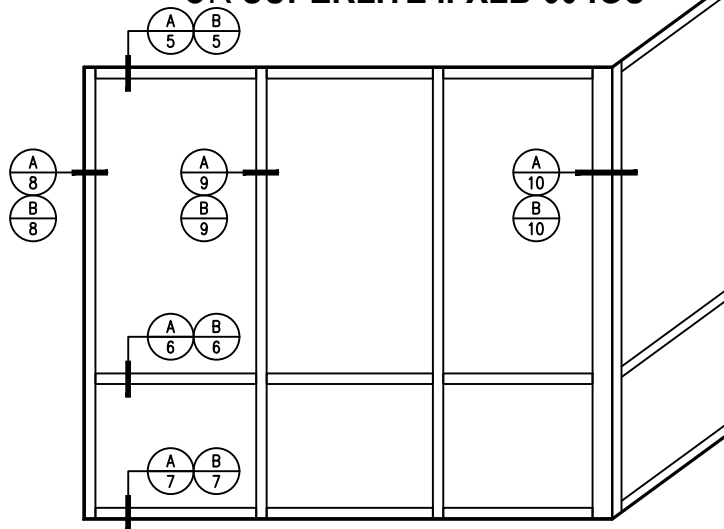

GPX ARCHITECTURAL SERIES FIRE RESISTIVE WALL - SEGMENTED WITH
SUPERLITE II-XL 60 IGU OR SUPERLITE II-XLB 60 IGU

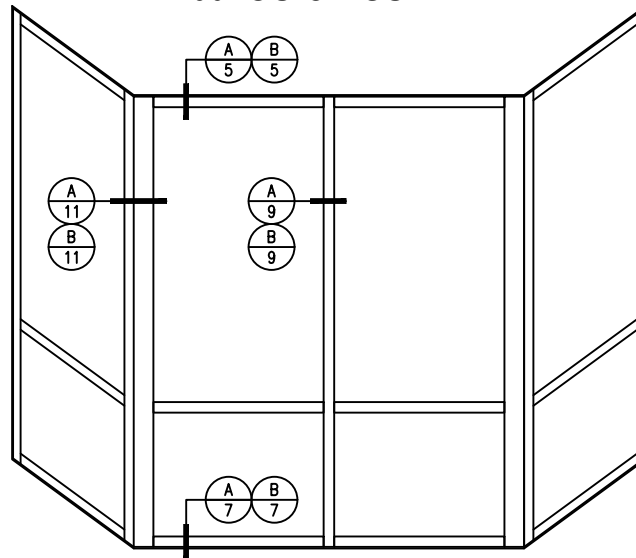


GLASS TYPE

- (A) SUPERLITE II-XL 60 IGU
MAX. CV AREA PER INDIVIDUAL LITE: **4,952 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **124 IN.**
- (B) SUPERLITE II-XLB 60 IGU
MAX. CV AREA PER INDIVIDUAL LITE: **10,000 SQ. IN.**
MAX. CV HEIGHT OR WIDTH PER INDIVIDUAL LITE: **125 IN.**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL

GPX ARCHITECTURAL SERIES FIRE RESISTIVE BUTT-GLAZED WALL
WITH SUPERLITE II-XLB 60 IGU OR SUPERLITE II-XLM 60

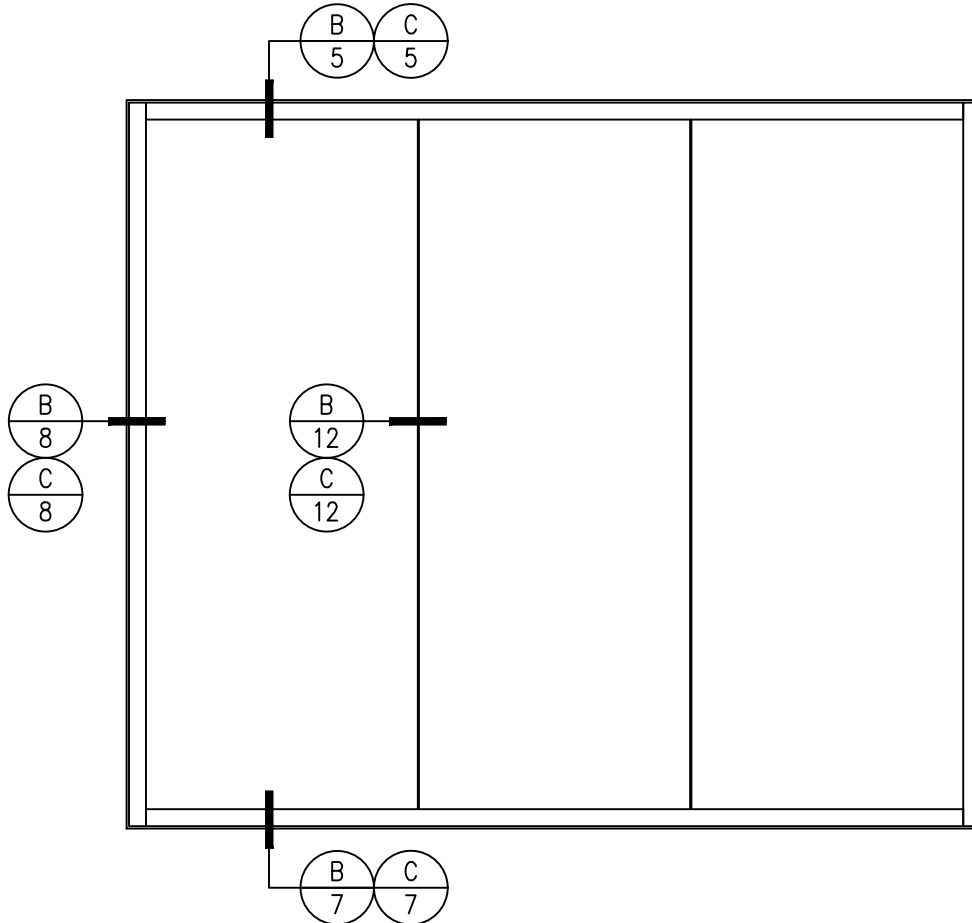

GLASS TYPE

- (B) SUPERLITE II-XLB 60 IGU
MAX. CV AREA PER INDIVIDUAL LITE:
10,000 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: **125 IN.**
- (C) SUPERLITE II-XLM 60
MAX. CV AREA PER INDIVIDUAL LITE:
3,855 SQ. IN.
MAX. CV HEIGHT OR WIDTH PER
INDIVIDUAL LITE: **87 5/8 IN.**

NOTICE:


SuperLite II-XLM is not warranted for exterior applications or when exposed to moisture. Not acceptable for use with pressure cap framing. Special precautions are necessary when handling and during installation due to breakage considerations. Optical and minor visual irregularities are deemed acceptable and not a reason for rejection. Special precaution must be taken to protect the fragile multiple layered thin annealed glass and the moisture barrier foil tape protecting the hydrophilic intumescent material within.

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES TEMPERATURE RISE SINGLE DOOR WITH SUPERLITE II-XL 60 IGU

STANDARD (D)

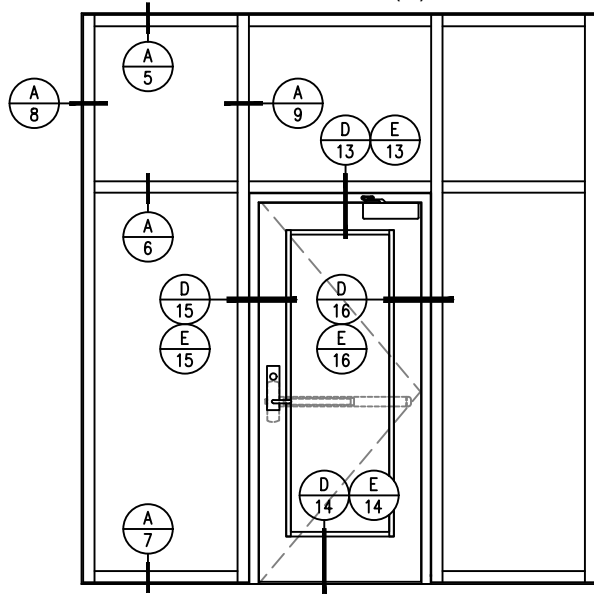


NARROW STYLE (E)

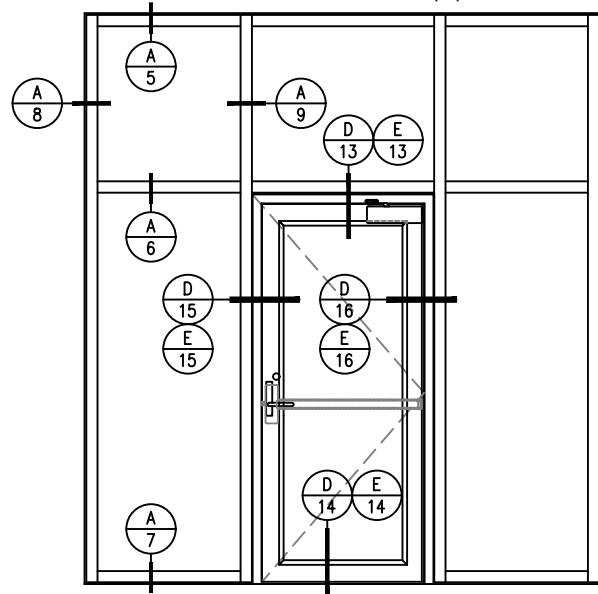


MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: **54 IN. X 120 IN.**

GPX BUILDERS SERIES TEMPERATURE RISE PAIR DOOR WITH SUPERLITE II-XL 60 IGU

STANDARD (D)

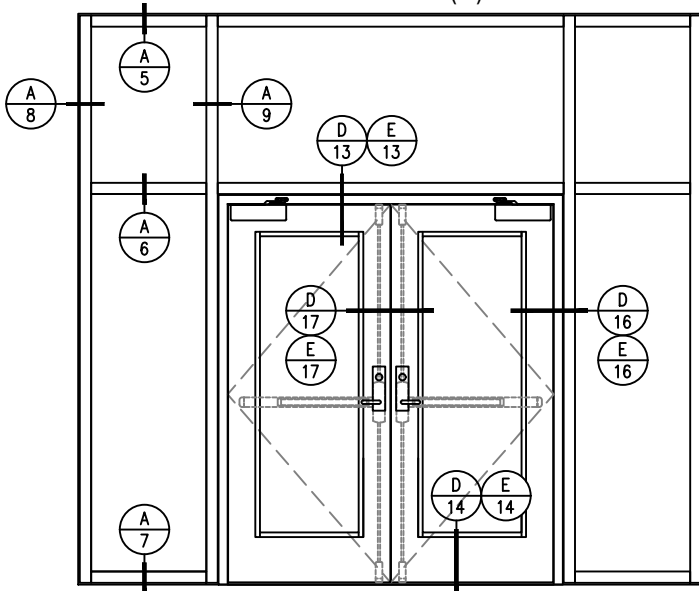

NARROW STYLE (E)

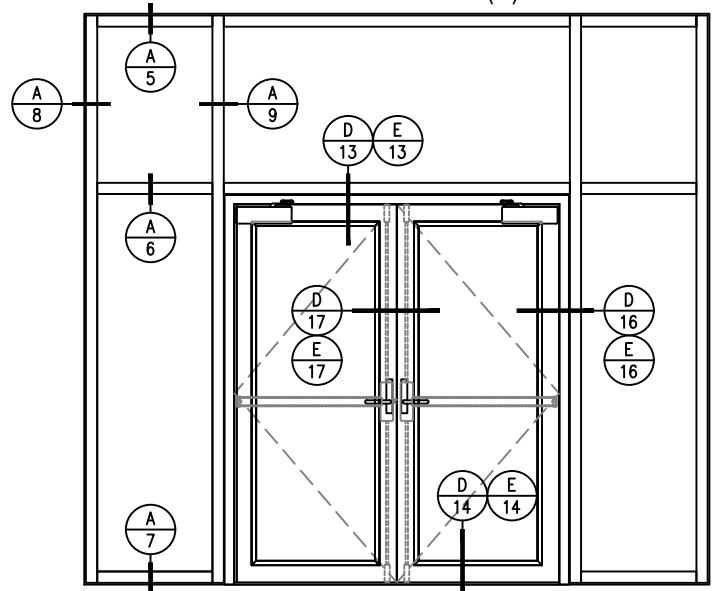


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: **96 IN. X 120 IN.**

GPX ARCHITECTURAL SERIES


60 MINUTE *FIRE RESISTIVE* GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* DOORS

GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* SINGLE DOOR WITH SUPERLITE II-XL 60 IGU

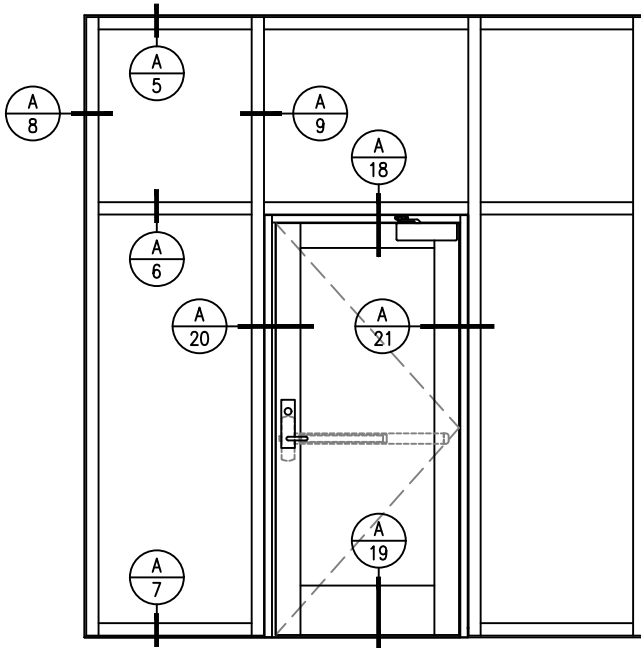

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES *FIRE RESISTIVE* PAIR DOOR WITH SUPERLITE II-XL 60 IGU

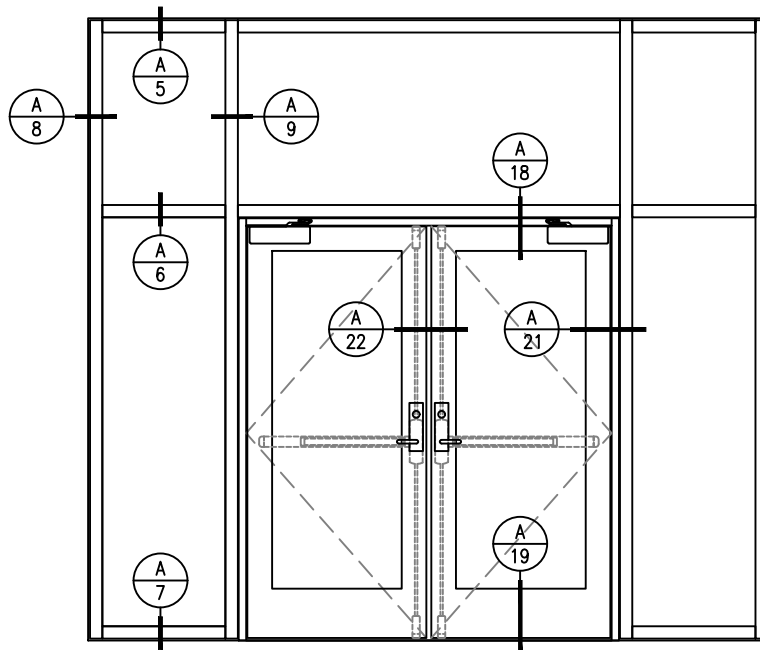


MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

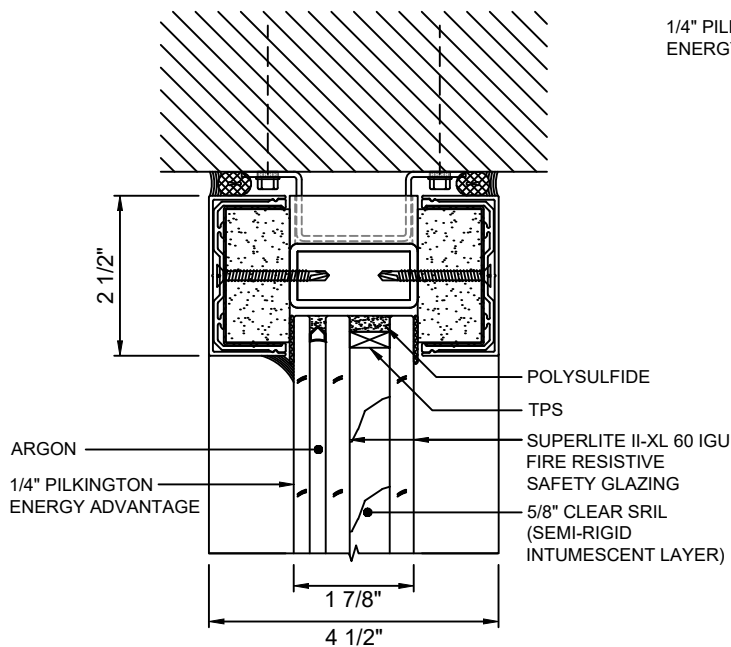

A
5 HEAD DETAIL
WITH SUPERLITE II-XL 60 IGU

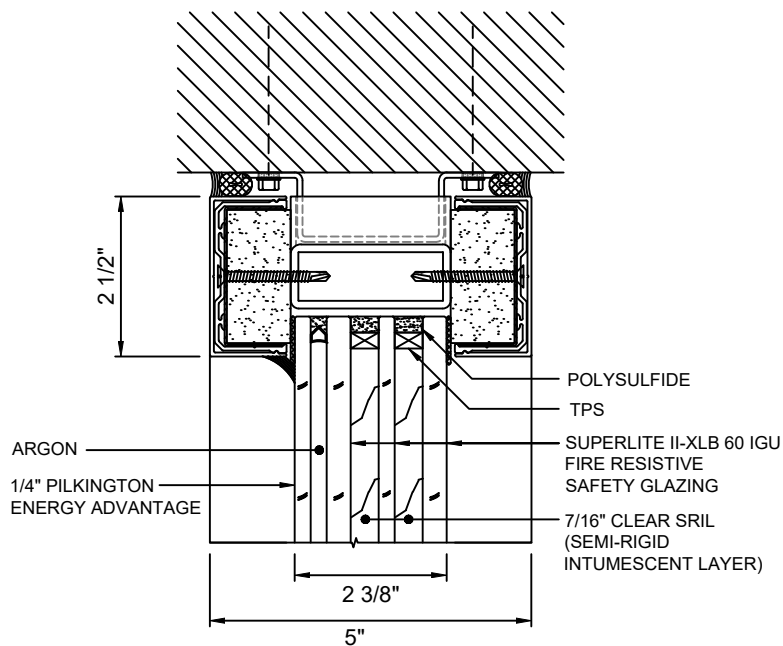


B
5 HEAD DETAIL
WITH SUPERLITE II-XLB 60 IGU

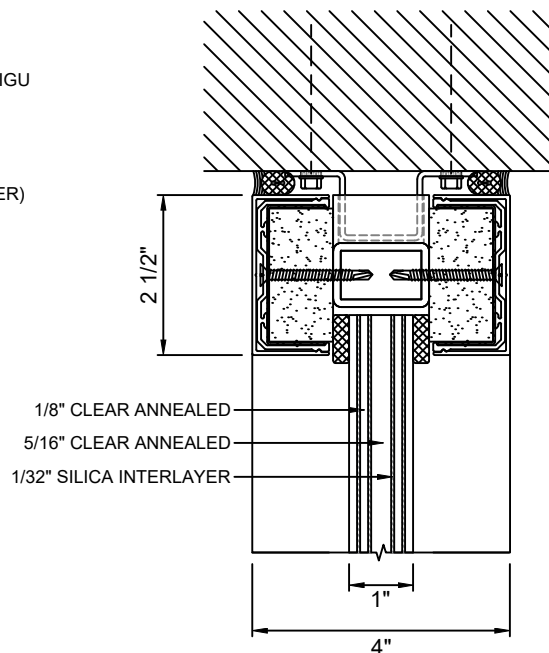


C
5 HEAD DETAIL
WITH SUPERLITE II-XLM 60

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

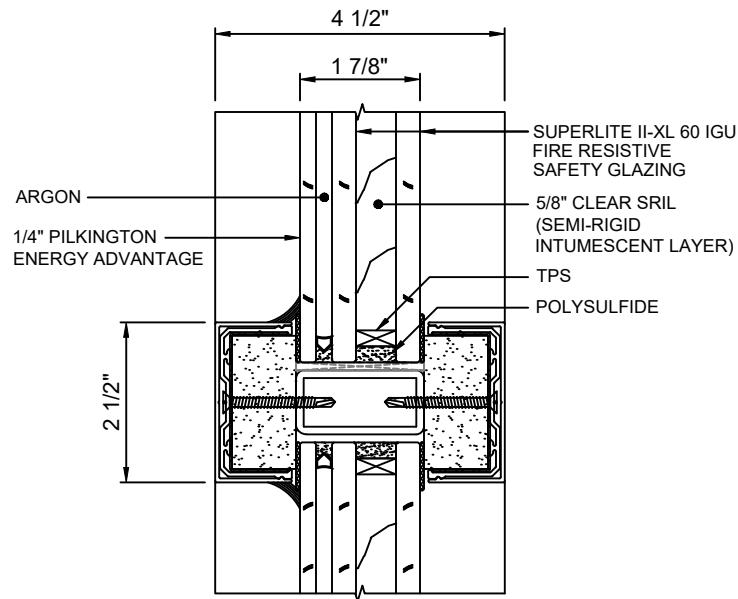


A
6 HORIZONTAL MULLION
WITH SUPERLITE II-XL 60 IGU

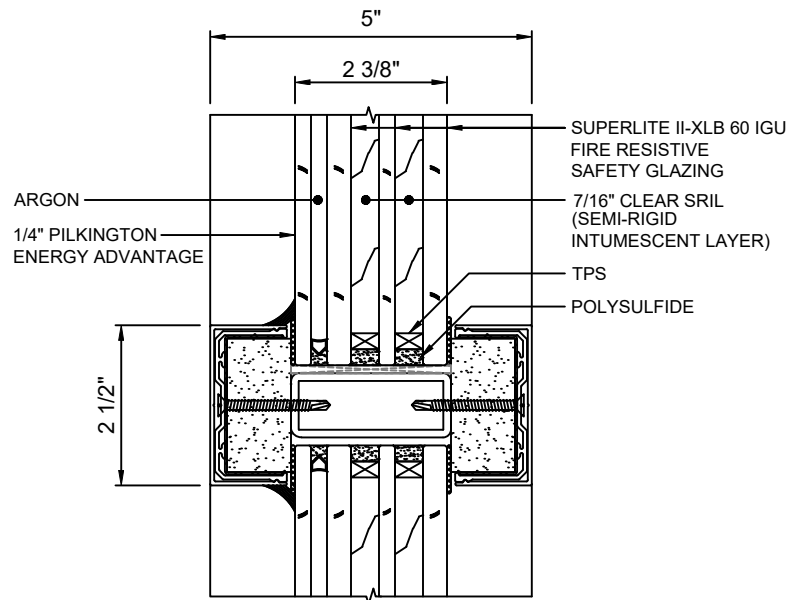


B
6 HORIZONTAL MULLION
WITH SUPERLITE II-XLB 60 IGU

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

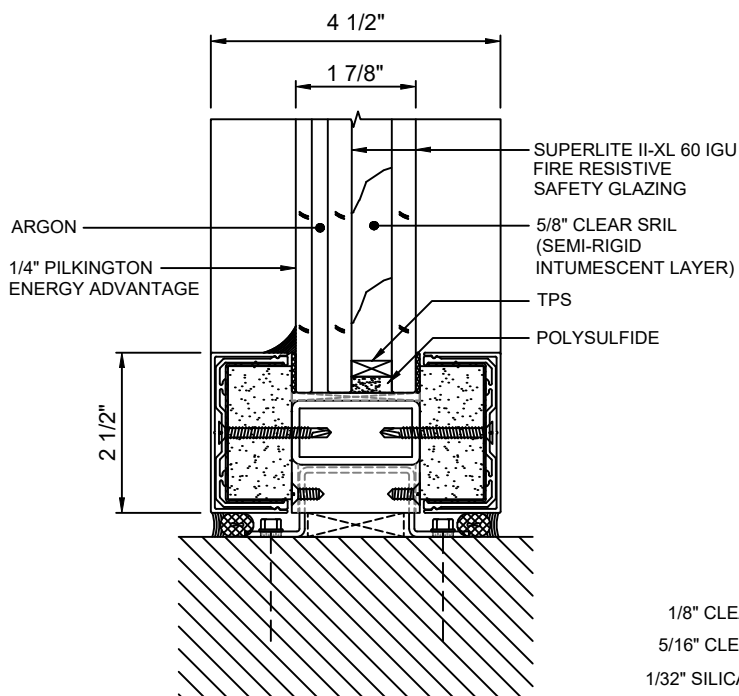

A
7 SILL DETAIL
WITH **SUPERLITE II-XL 60 IGU**

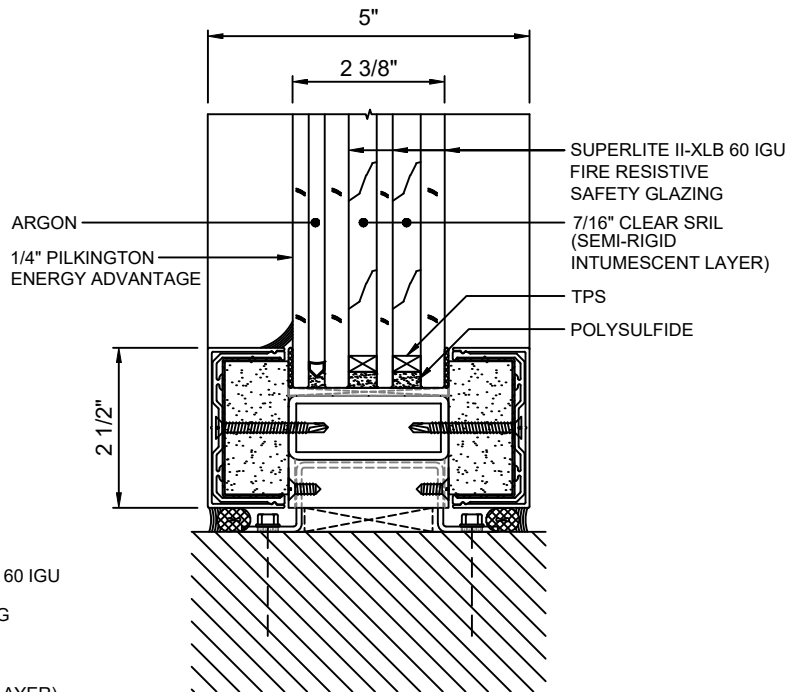


B
7 SILL DETAIL
WITH **SUPERLITE II-XLB 60**

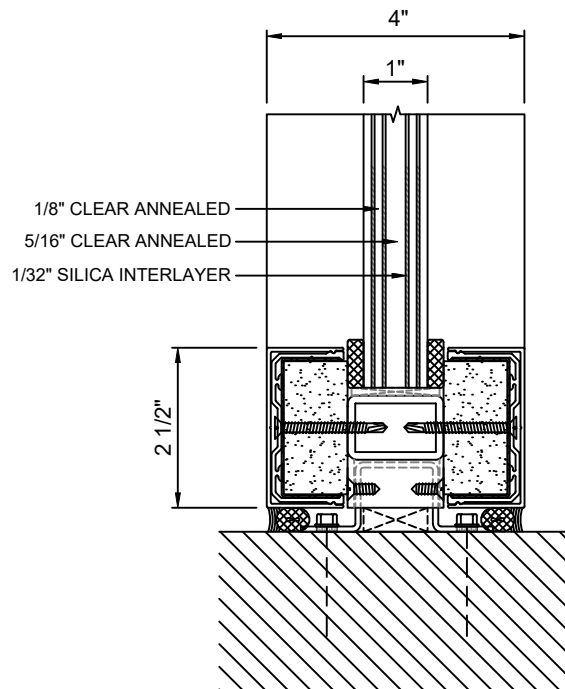


C
7 SILL DETAIL
WITH **SUPERLITE II-XLM 60**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

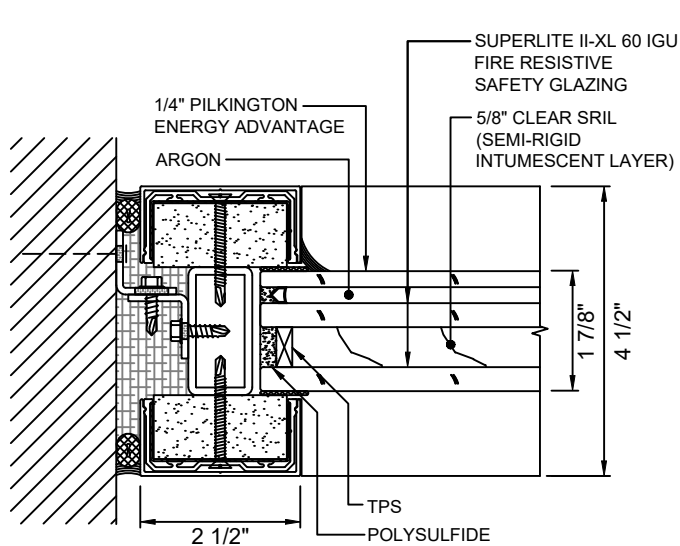

A
8 JAMB DETAIL
WITH **SUPERLITE II-XL 60 IGU**

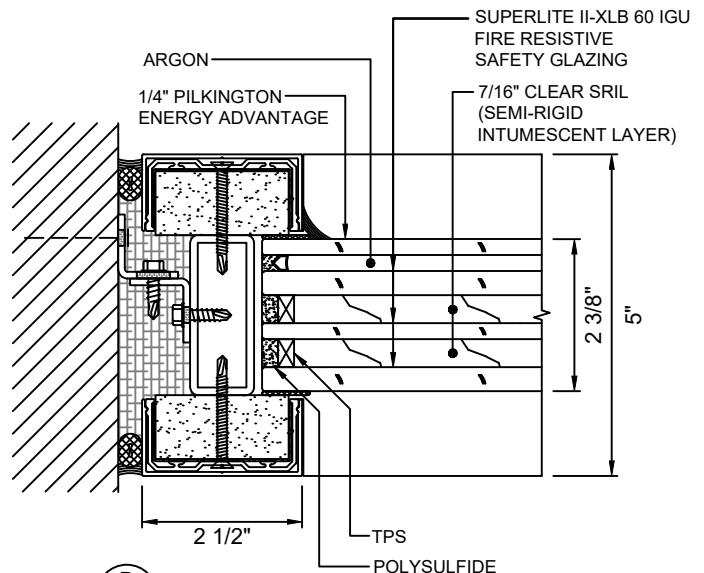


B
8 JAMB DETAIL
WITH **SUPERLITE II-XLB 60 IGU**

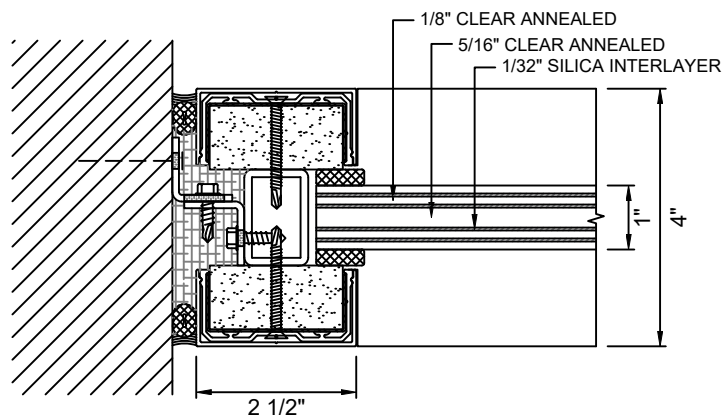


C
8 JAMB DETAIL
WITH **SUPERLITE II-XLM 60**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

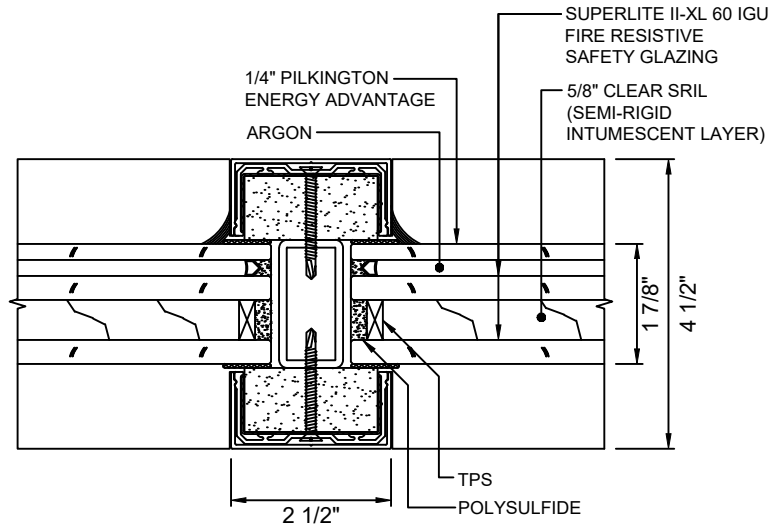


(A)
9 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XL 60 IGU**

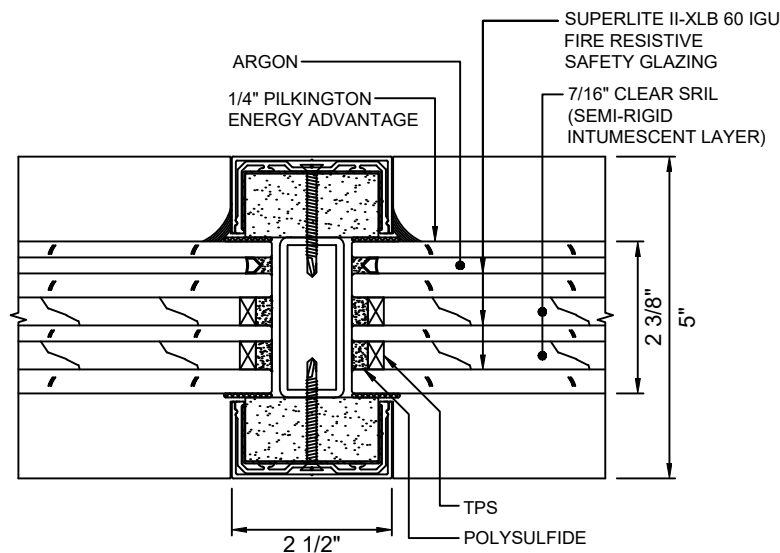


(B)
9 VERTICAL MULLION DETAIL
WITH **SUPERLITE II-XLB 60 IGU**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

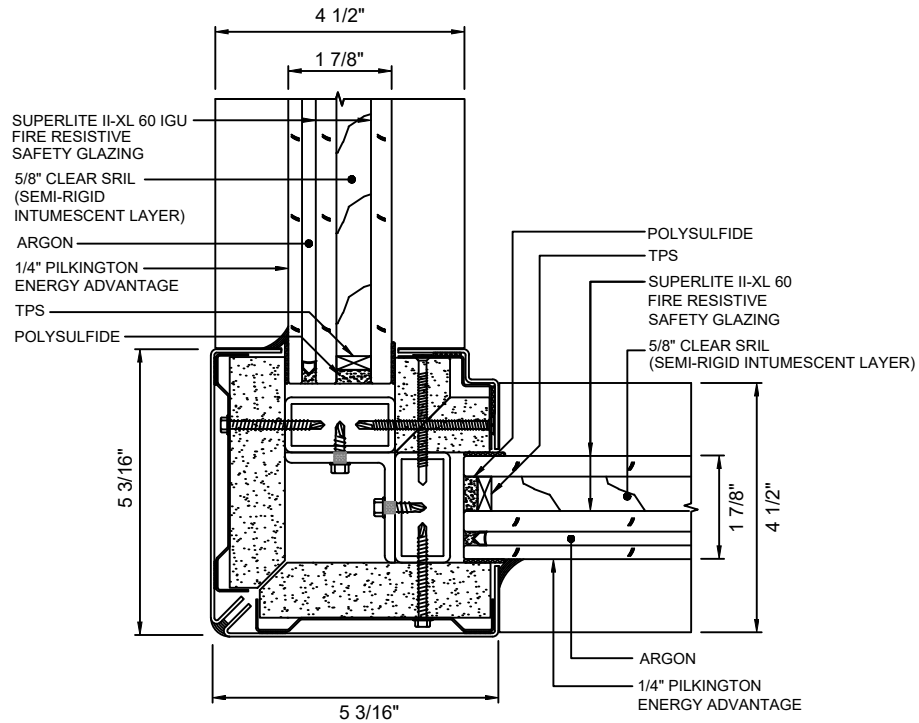


A 90° CORNER DETAIL
10 WITH SUPERLITE II-XL 60 IGU

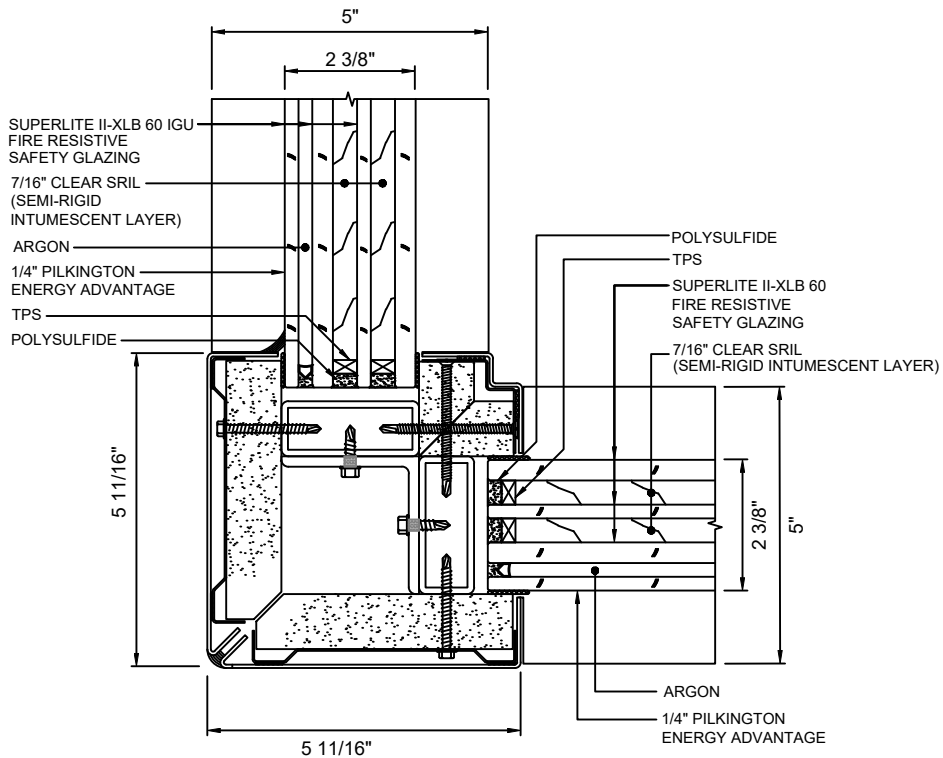


B 90° CORNER DETAIL
10 WITH SUPERLITE II-XLB 60 IGU

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

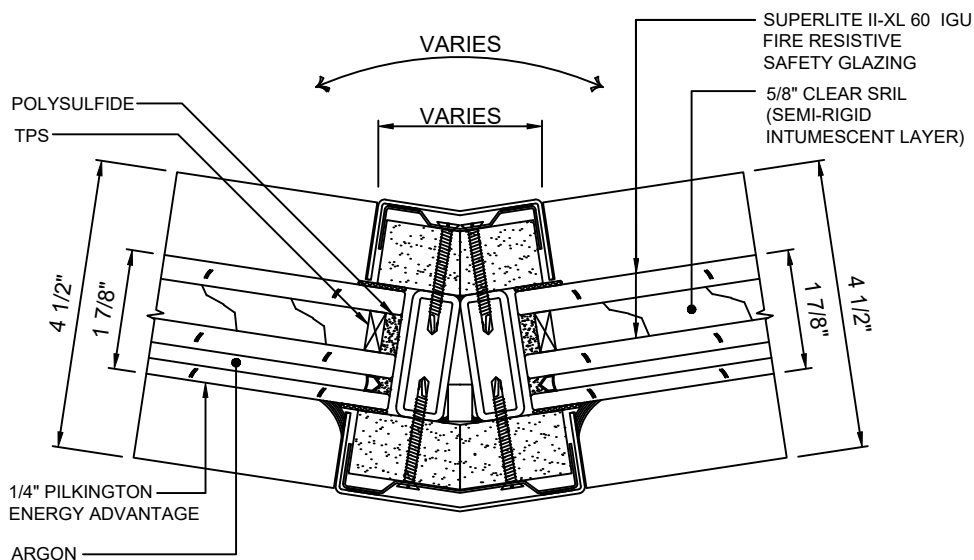


A
11
SEGMENTED VERTICAL
WITH **SUPERLITE II-XL 60 IGU**

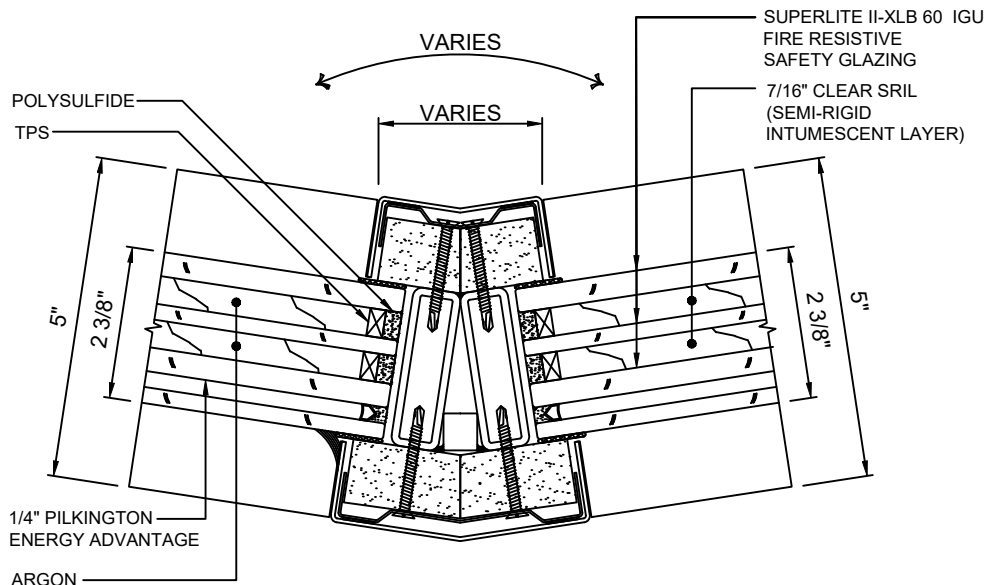


B
11
SEGMENTED VERTICAL
WITH **SUPERLITE II-XLB 60 IGU**

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX WALL/ WINDOW

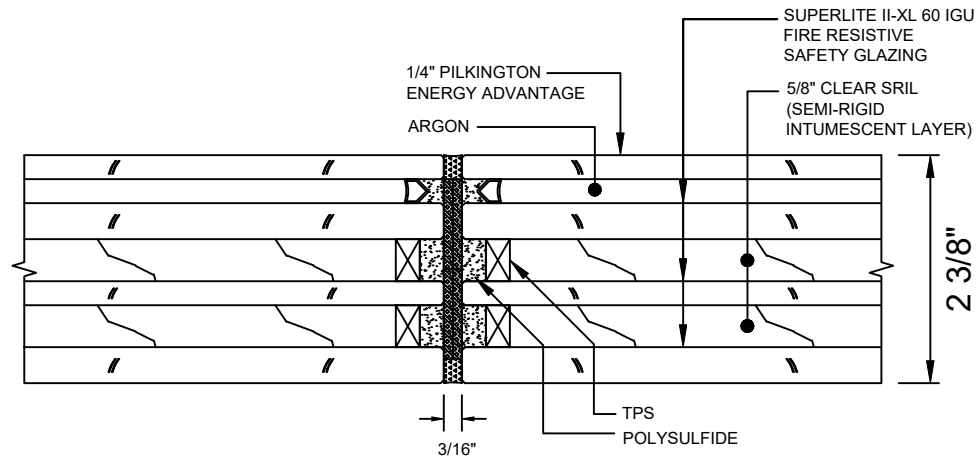

B
12
**VERTICAL BUTT JOINT
WITH SUPERLITE II-XLB 60 IGU**

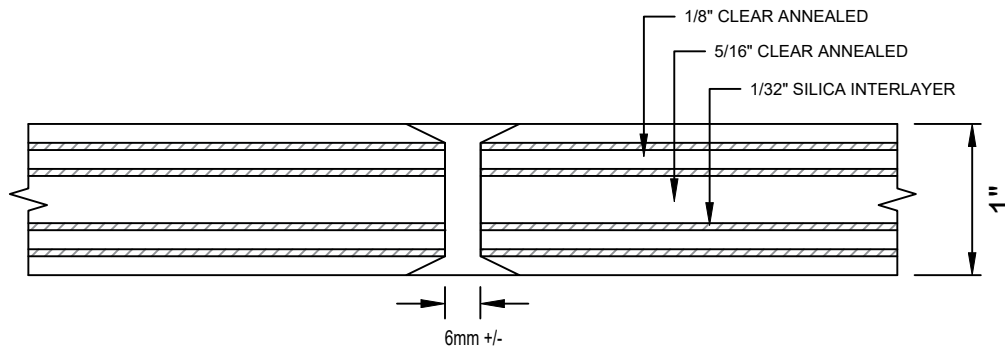


C
12
**VERTICAL BUTT JOINT
WITH SUPERLITE II-XLM 60**

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

GPX BUILDERS SERIES DOOR NARROW STYLE

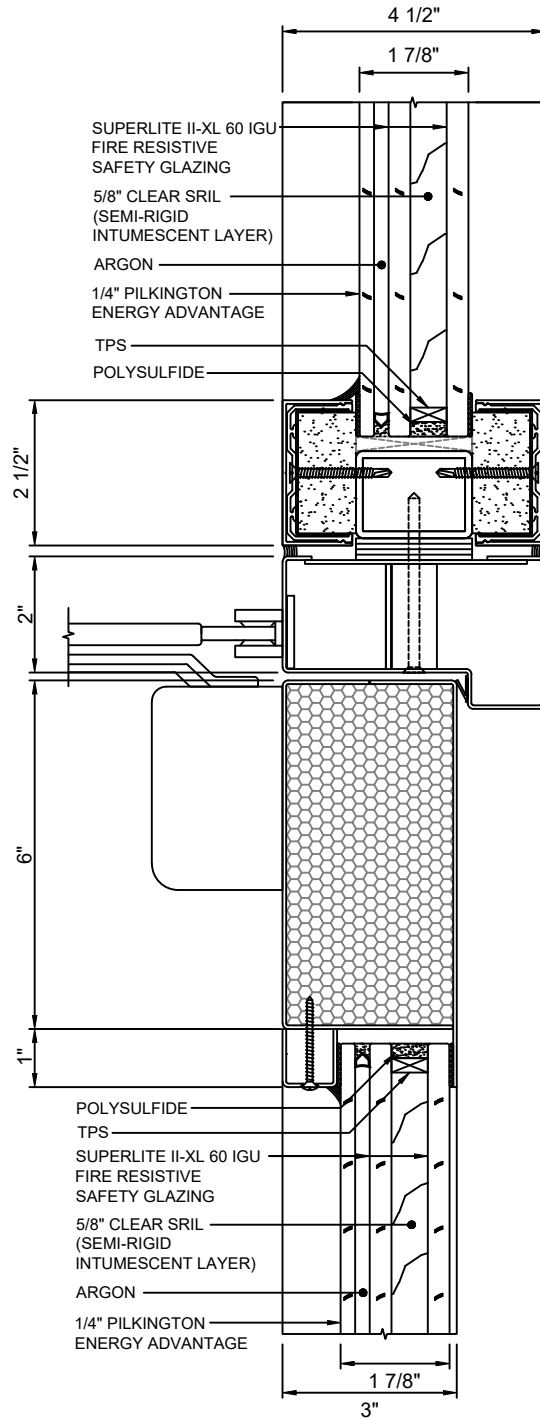

D
13 DOOR TOP RAIL - STANDARD
WITH SUPERLITE II-XL 60 IGU

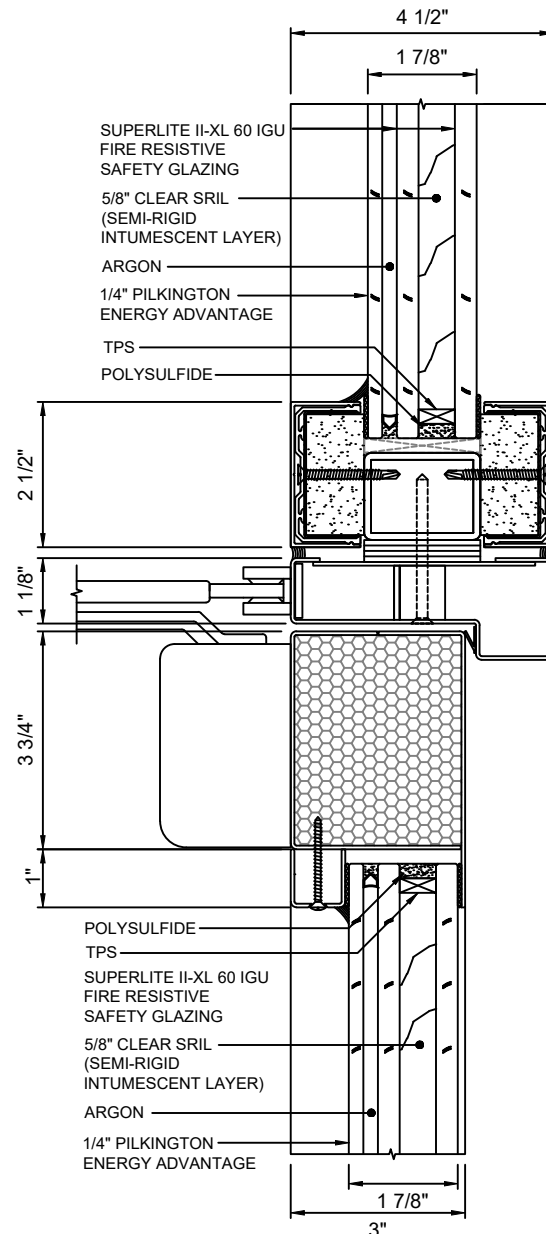



E
13 DOOR TOP RAIL - NARROW STYLE
WITH SUPERLITE II-XL 60 IGU

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD WITH & WITHOUT DOOR BOTTOM


GPX BUILDERS SERIES DOOR NARROW STYLE WITH & WITHOUT DOOR BOTTOM

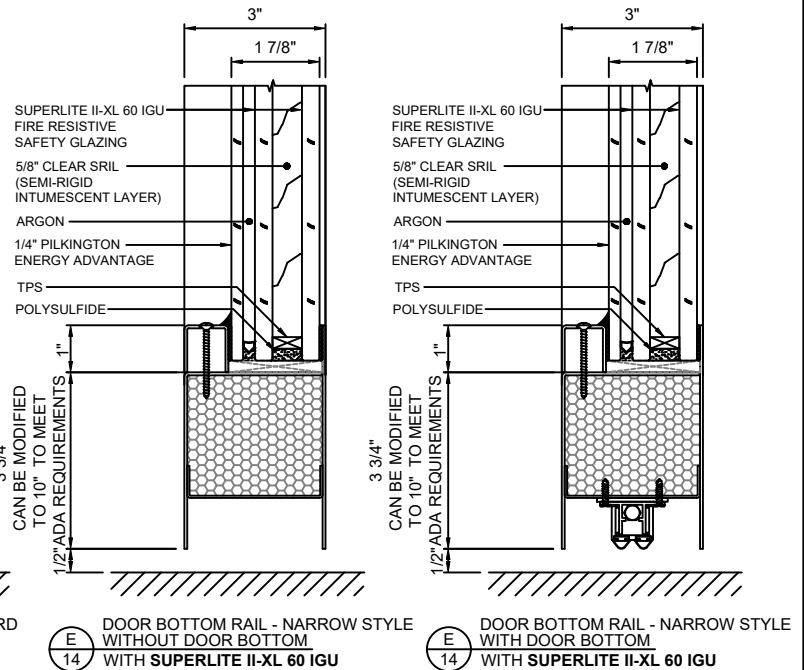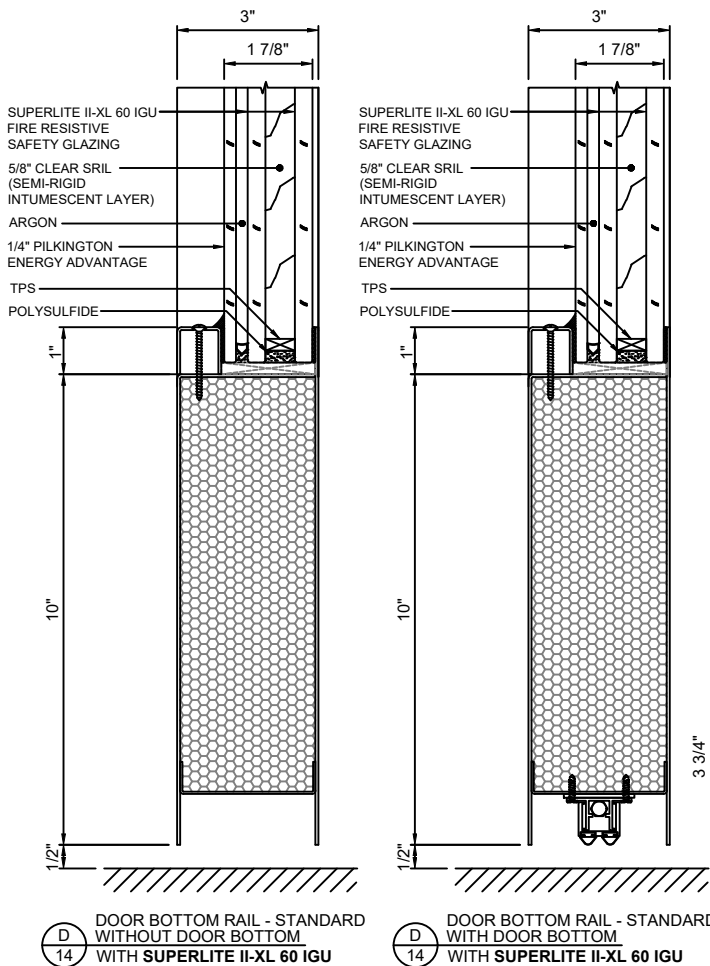

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

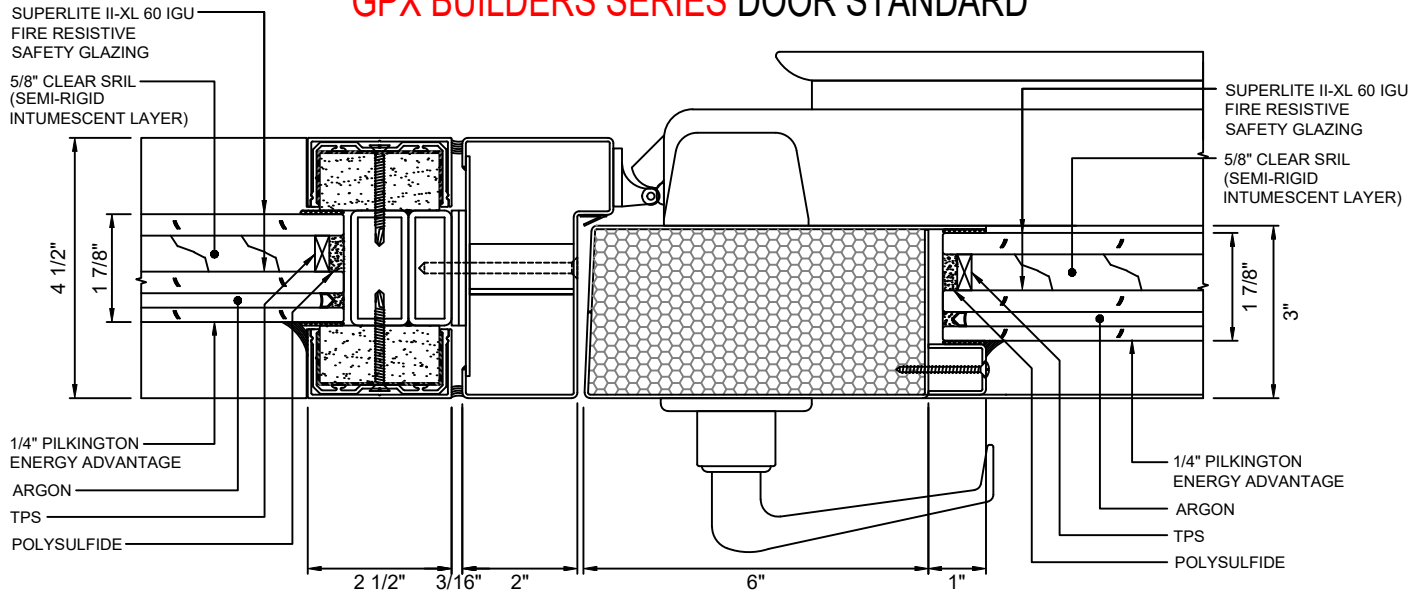

D DOOR JAMB AT LOCK - STANDARD
15 WITH SUPERLITE II-XL 60 IGU

GPX BUILDERS SERIES DOOR NARROW STYLE

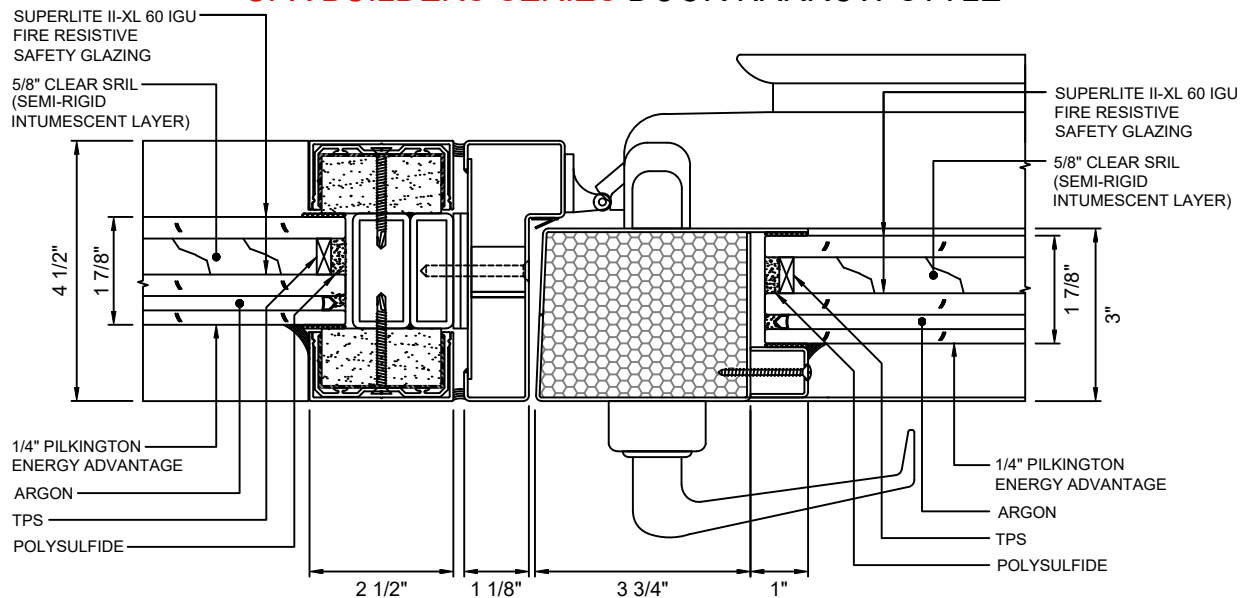


E DOOR JAMB AT LOCK - NARROW STYLE
15 WITH SUPERLITE II-XL 60


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

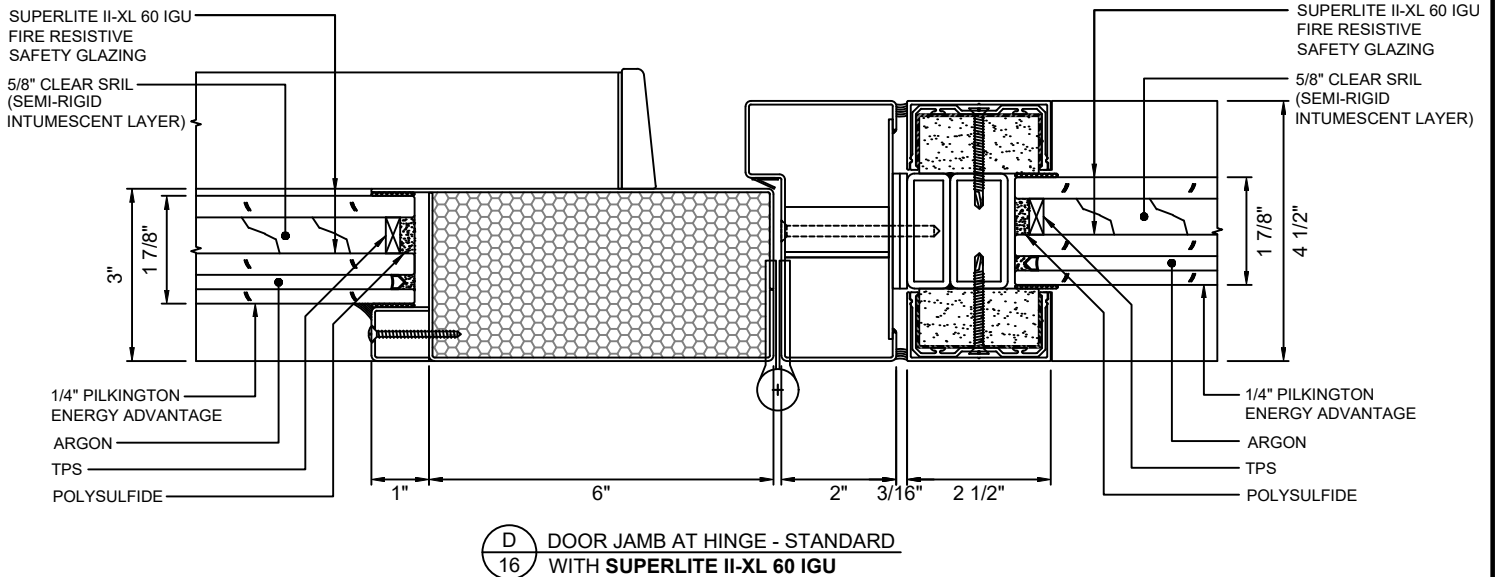


GPX BUILDERS SERIES DOOR NARROW STYLE

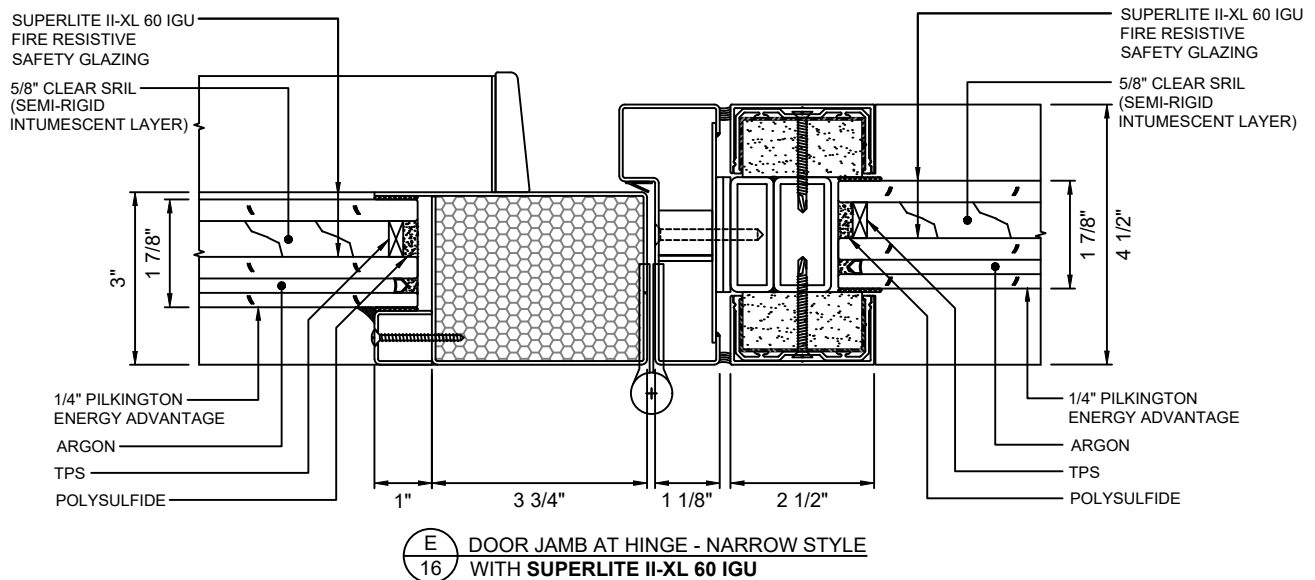

GPX ARCHITECTURAL SERIES


60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX BUILDERS SERIES TEMPERATURE RISE DOORS

GPX BUILDERS SERIES DOOR STANDARD

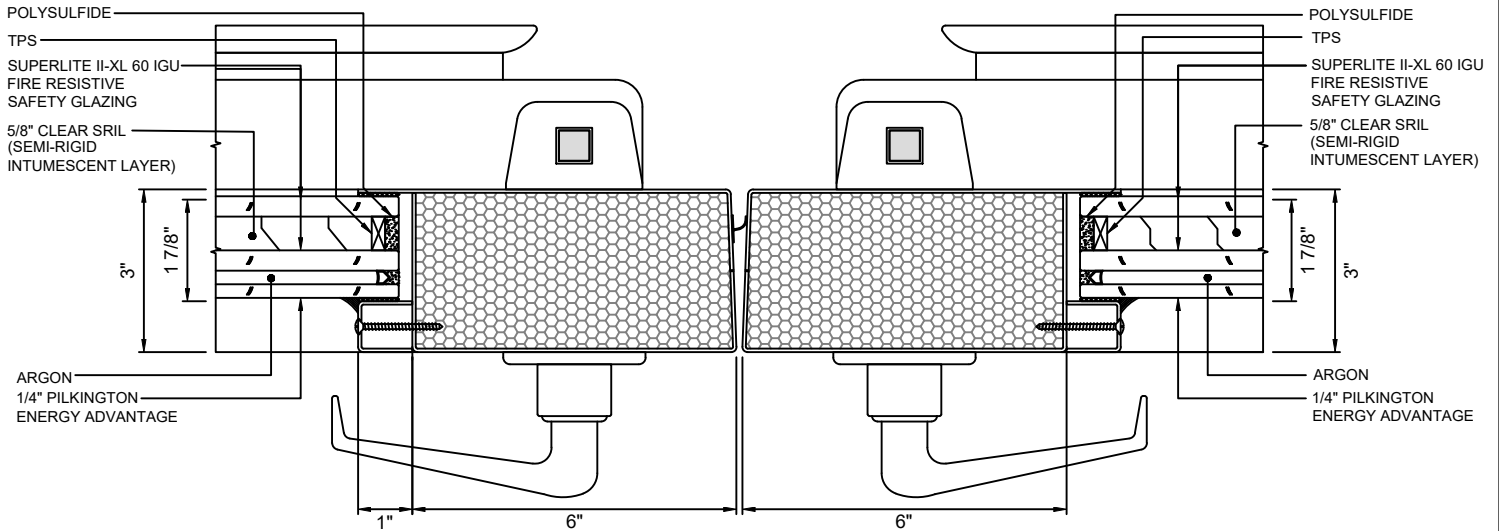

D MEETING STILES - STANDARD
WITH SUPERLITE II-XL 60 IGU


GPX BUILDERS SERIES DOOR NARROW STYLE

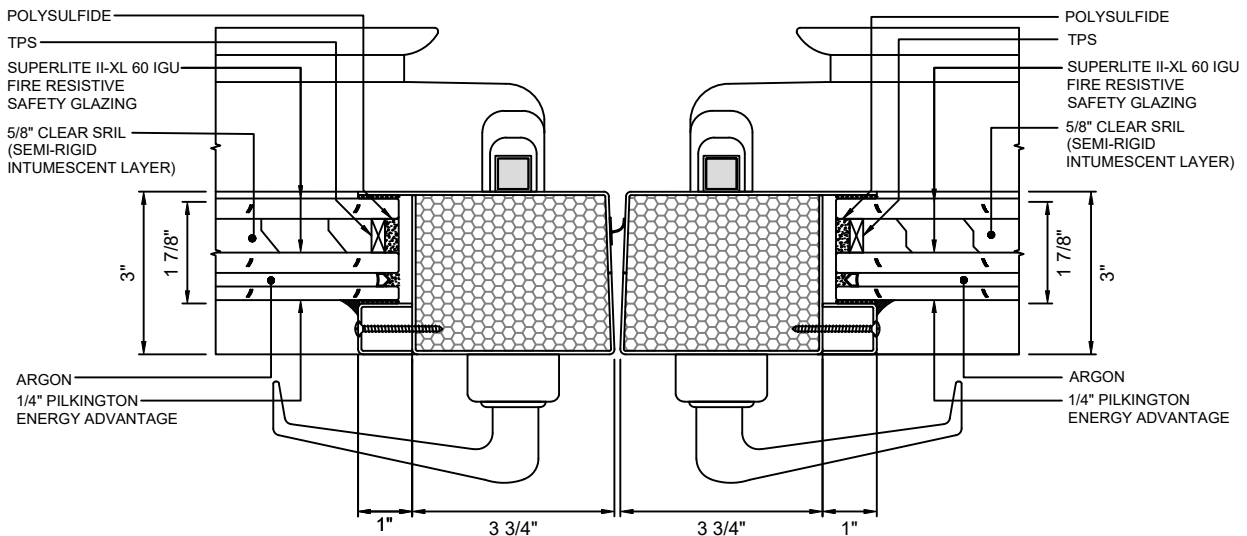

E MEETING STILES - NARROW STYLE
WITH SUPERLITE II-XL 60 IGU

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

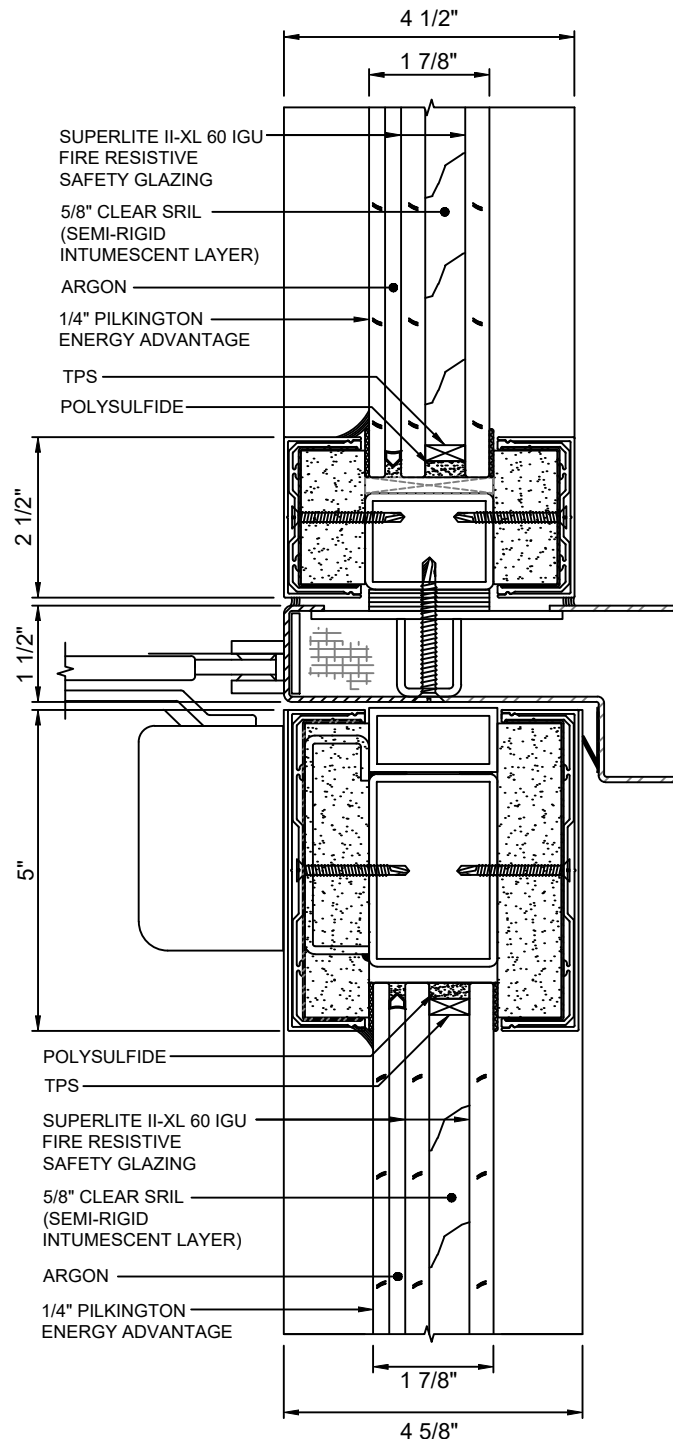


A DOOR TOP RAIL
18 WITH SUPERLITE II-XL 60 IGU


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

WITH & WITHOUT DOOR BOTTOM

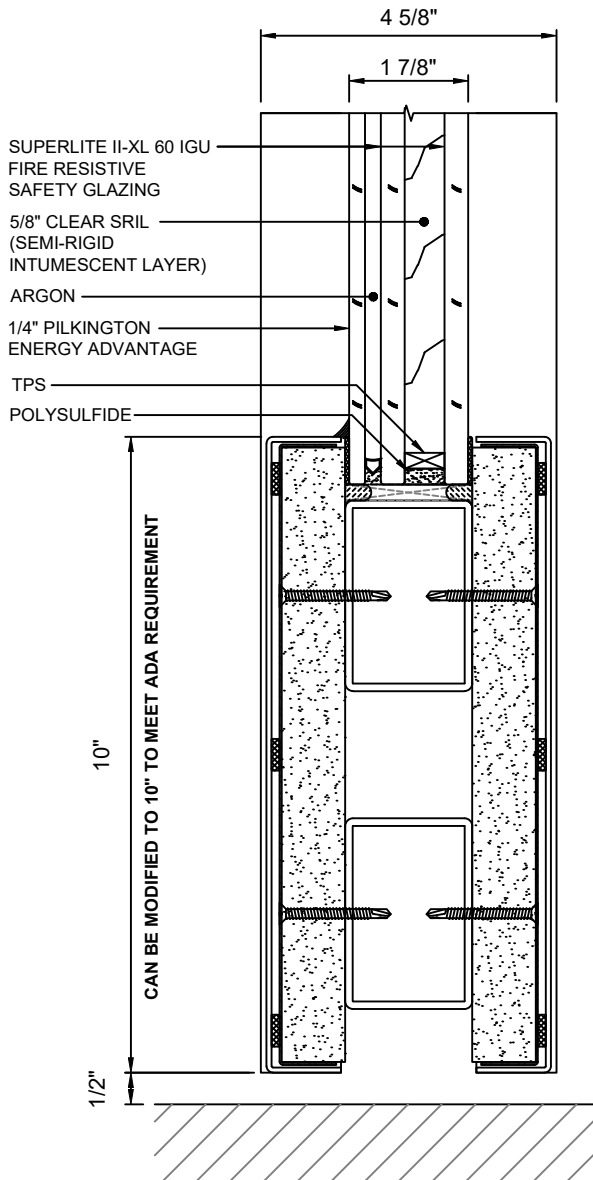


A
19 DOOR BOTTOM RAIL
WITHOUT DOOR BOTTOM
WITH SUPERLITE II-XL 60 IGU

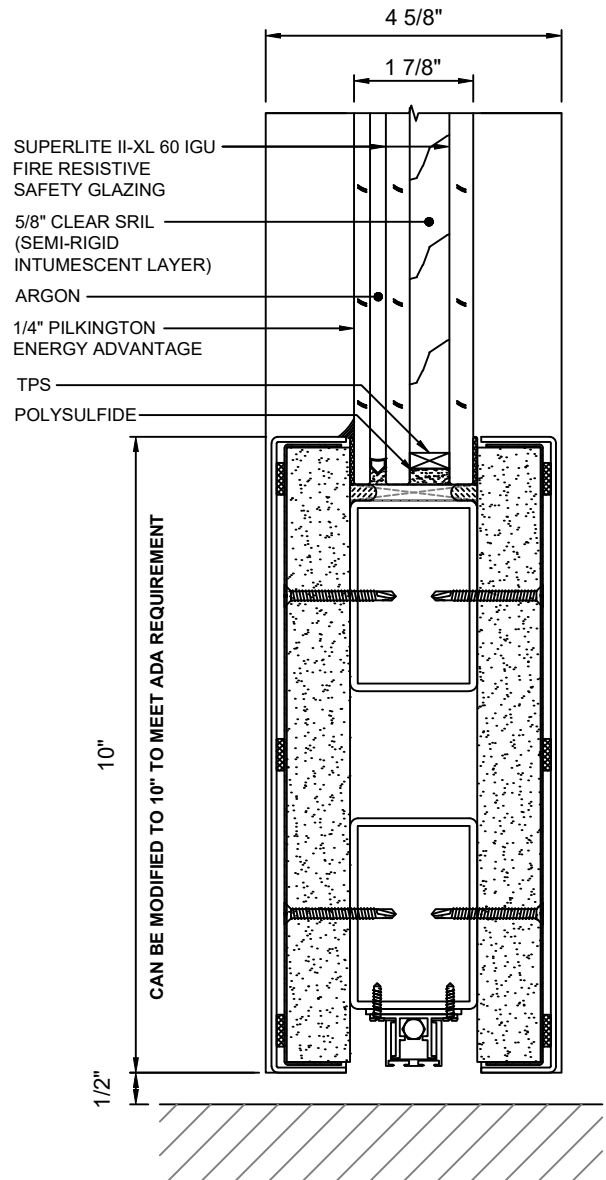

A
19 DOOR BOTTOM RAIL
WITH DOOR BOTTOM
WITH SUPERLITE II-XL 60 IGU


GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

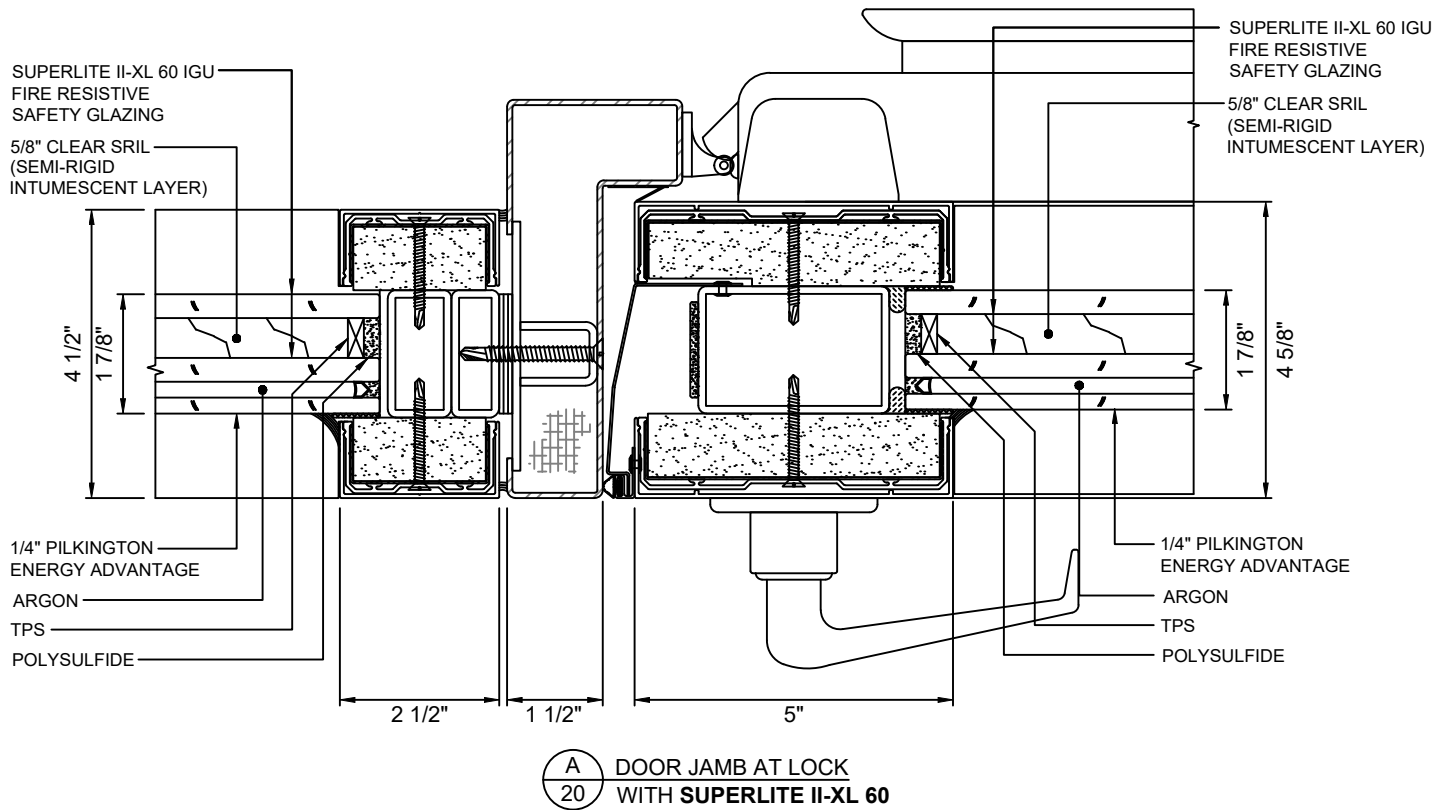

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

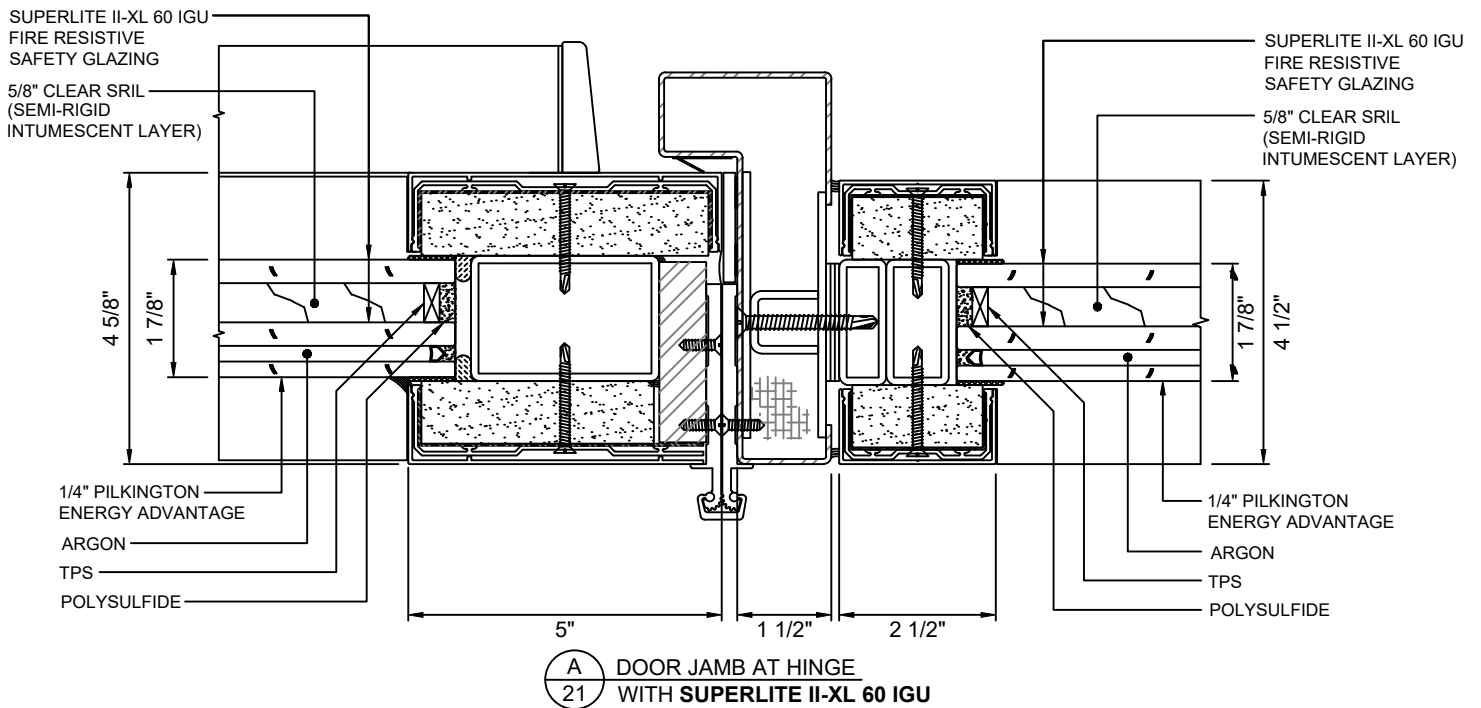

GPX ARCHITECTURAL SERIES

60 MINUTE FIRE RESISTIVE GPX SIDELITES/TRANSOMS WITH 60 MINUTE GPX ARCHITECTURAL SERIES FIRE RESISTIVE DOORS

