


GPX ARCHITECTURAL SERIES


90 MINUTE FIRE RESISTIVE DOORS

GPX ARCHITECTURAL SERIES FIRE RESISTIVE SINGLE DOOR WITH SUPERLITE II-XL 90 IGU

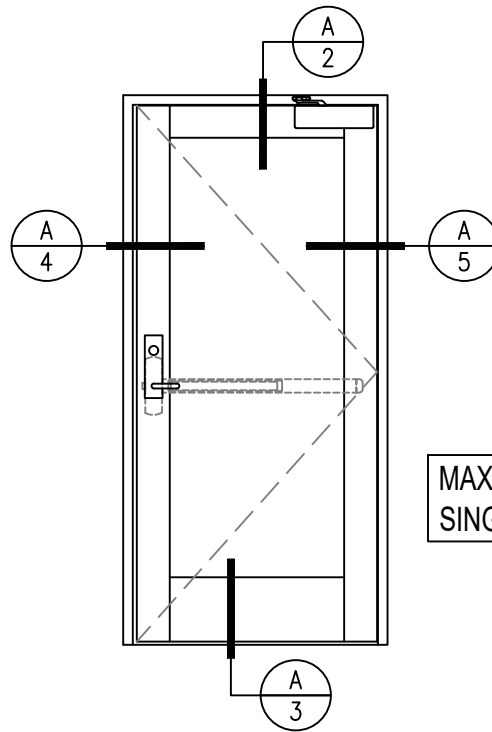

MAX. DOOR OPENING SIZE FOR
SINGLE DOOR: 48 IN. X 108 IN.


GPX ARCHITECTURAL SERIES FIRE RESISTIVE PAIR DOOR WITH SUPERLITE II-XL 90 IGU

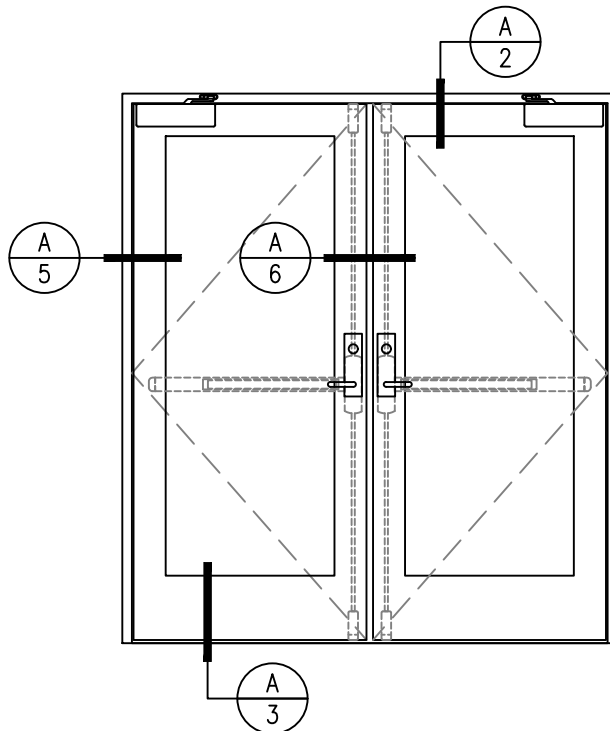

MAX. DOOR OPENING SIZE FOR
PAIR DOOR: 96 IN. X 106 IN.

GPX ARCHITECTURAL SERIES

90 MINUTE FIRE RESISTIVE DOORS

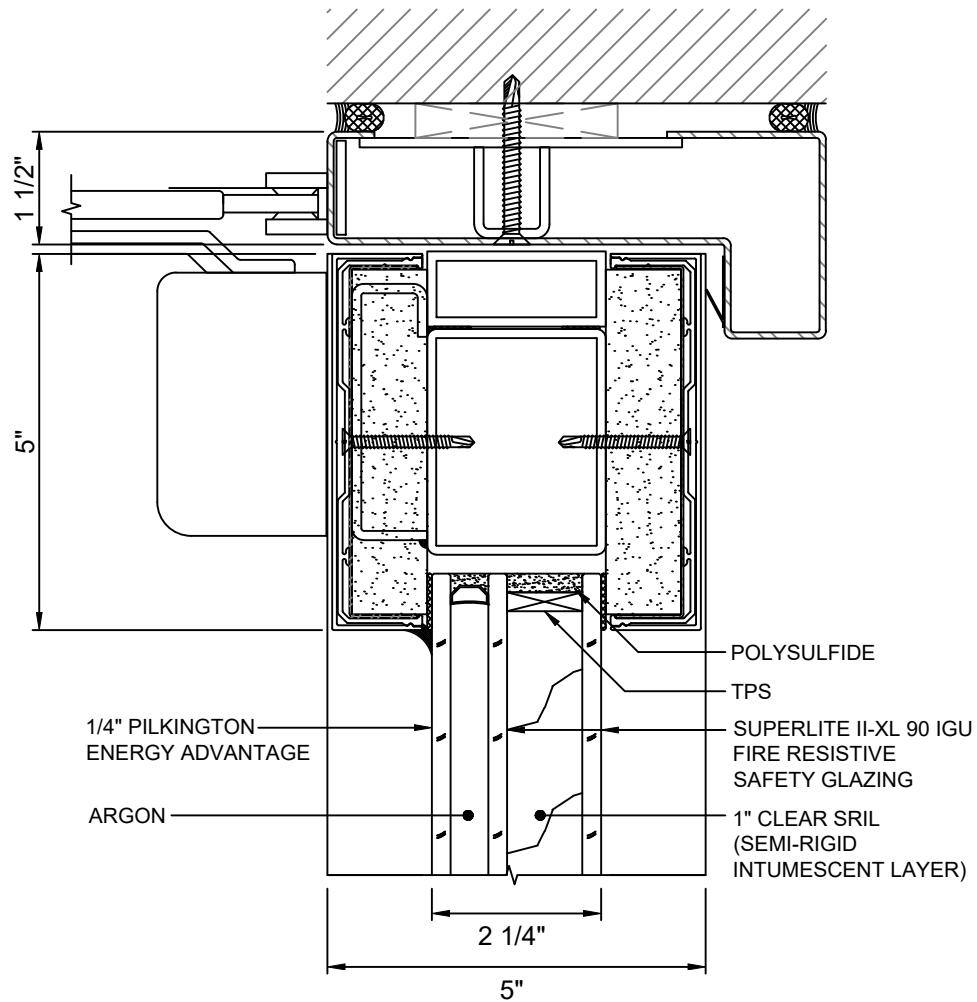


A
2 DOOR TOP RAIL
WITH SUPERLITE II-XL 90 IGU


GPX ARCHITECTURAL SERIES

90 MINUTE FIRE RESISTIVE DOORS

WITH & WITHOUT THRESHOLD

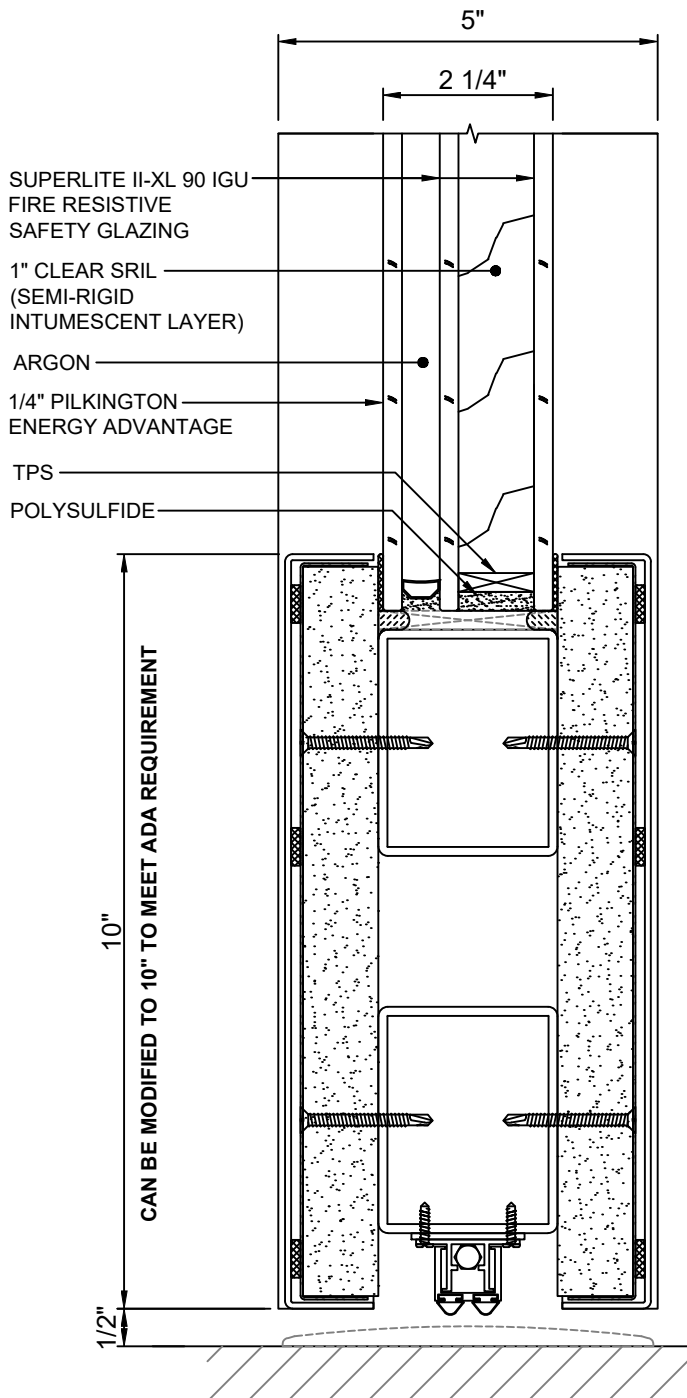


A
3 DOOR BOTTOM RAIL WITH DOOR BOTTOM WITH SUPERLITE II-XL 90 IGU

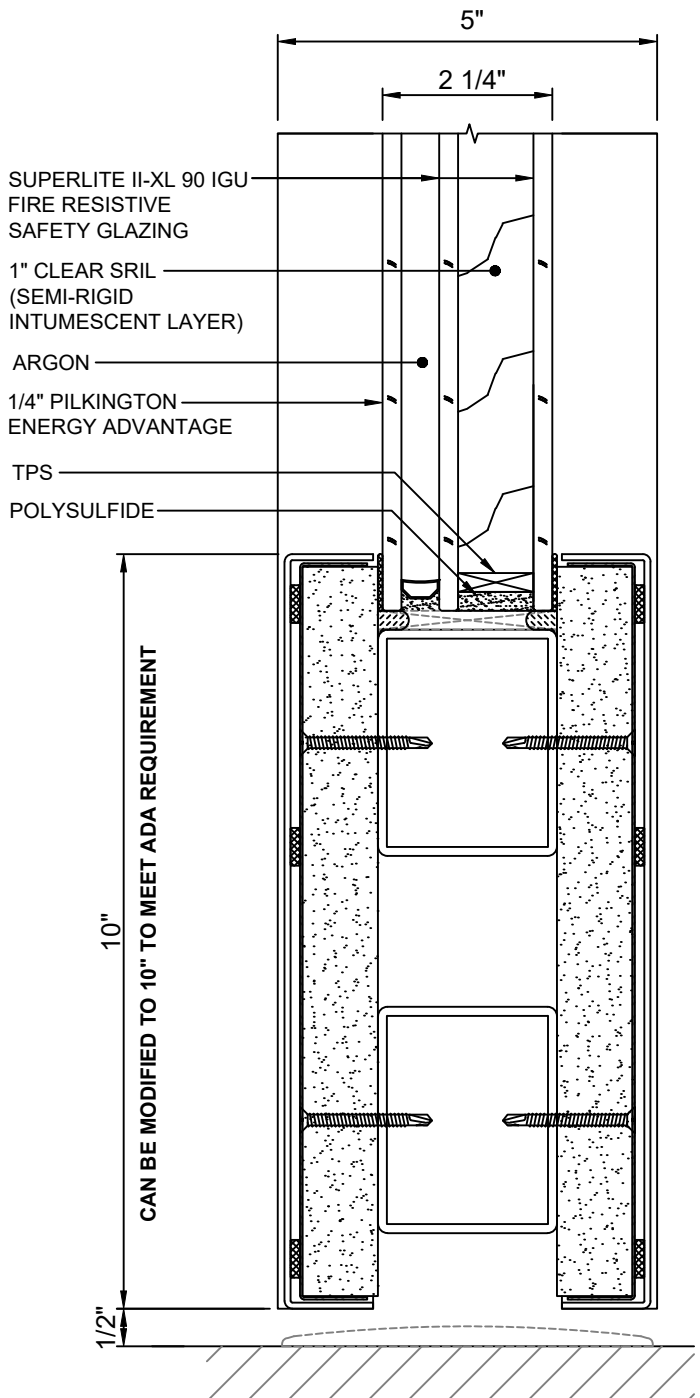

A
3 DOOR BOTTOM RAIL WITHOUT DOOR BOTTOM WITH SUPERLITE II-XL 90 IGU

GPX ARCHITECTURAL SERIES


90 MINUTE FIRE RESISTIVE DOORS

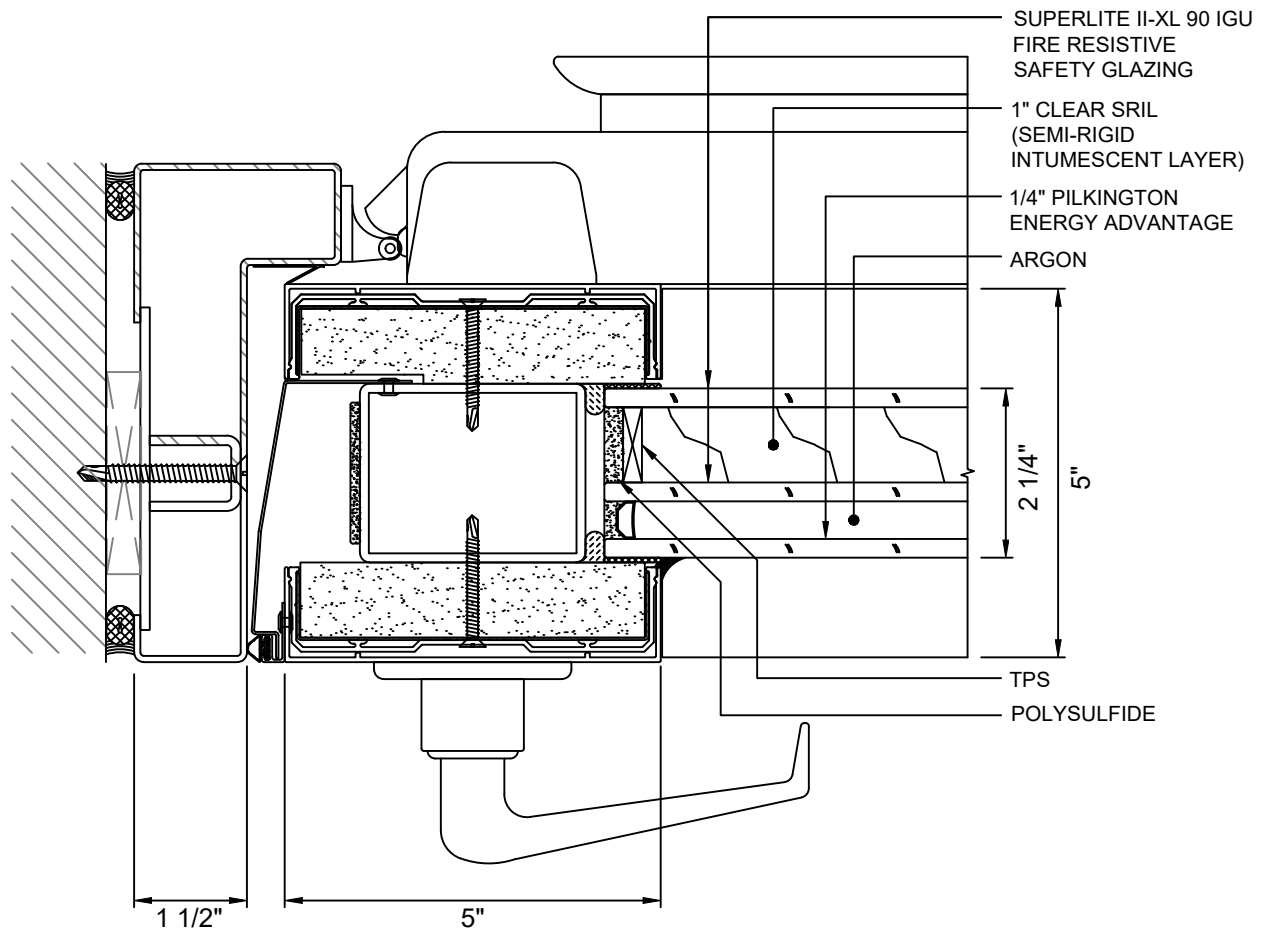

A
4 DOOR JAMB AT LOCK
WITH **SUPERLITE II-XL 90 IGU**

GPX ARCHITECTURAL SERIES


90 MINUTE FIRE RESISTIVE DOORS

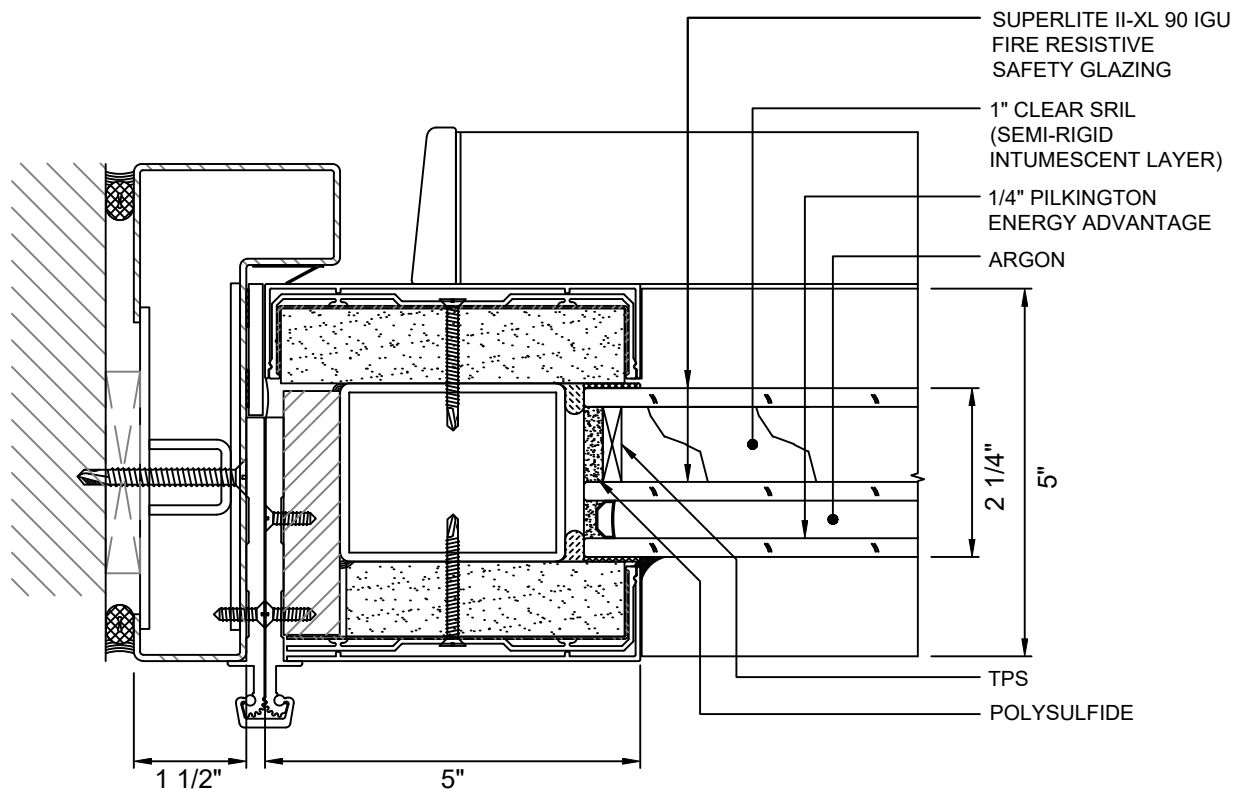

A
5 DOOR JAMB AT HINGE
WITH SUPERLITE II-XL 90 IGU

GPX ARCHITECTURAL SERIES

90 MINUTE FIRE RESISTIVE DOORS

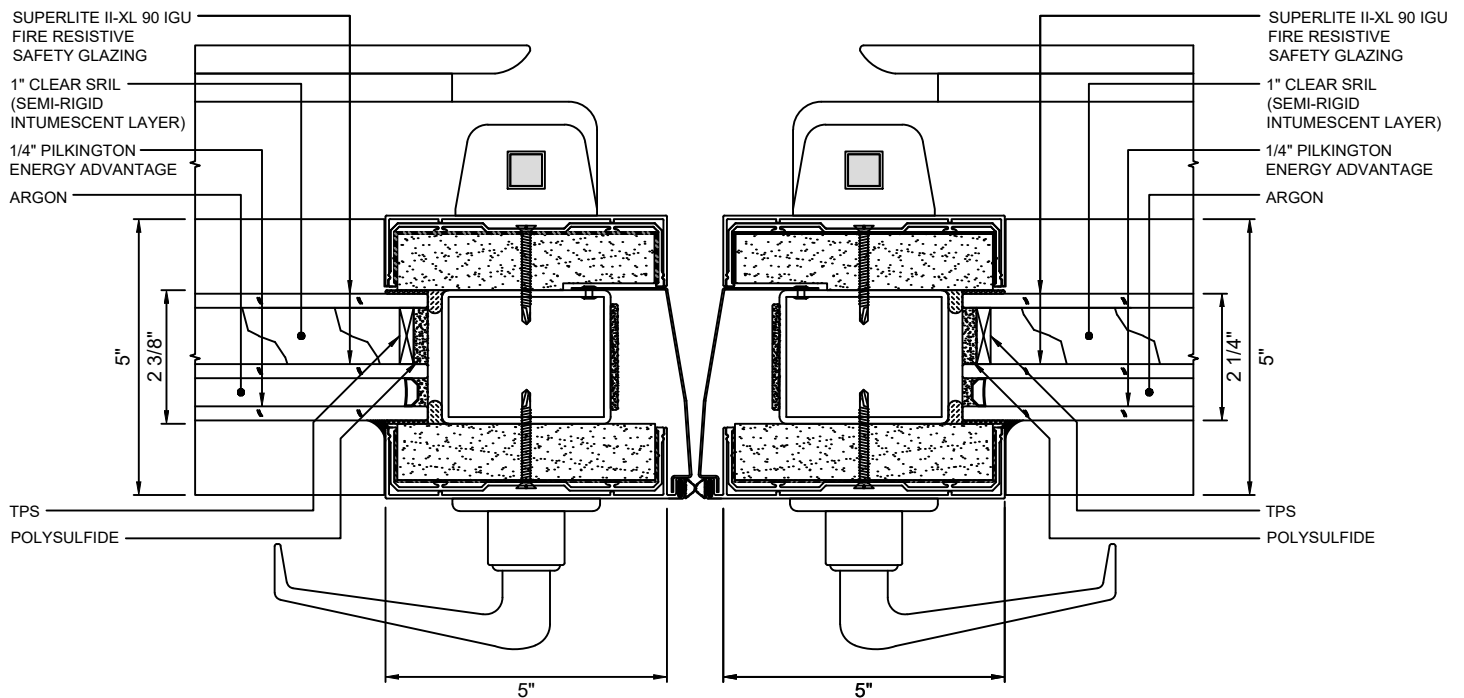

A MEETING STILES
6 WITH SUPERLITE II-XL 90 IGU